

DDM 15/15

M7A3 3F 6P 2V +SCT

Technical Data

	Speed control	Curves	Nominal motor power W	Poles —	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 15/15 M7A3										
3F 6P 2V +SCT	(2)/(3)	[Q1]	1500	6	3~	Δ/Y	50	4410	7.9	930

Technical Data

	Operating Capacitor	Nominal capacitor voltage	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max.	Fan weight	Density of media	Installation type (ISO 5801)	Article number
DDM 15/15 M7A3	µF	V				°C	kg	kg/m³		
3F 6P 2V +SCT			IP54	F	EXT	40	60	1.2	B	6M02124

(1) = Speed controllable via Transformer

(2) = Speed controllable via TRIAC or Transformer


(3) = Speed controllable via Inverter

* = No speed control available

[HI] High speed, [ME] Medium speed, [LO] Low speed



Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves

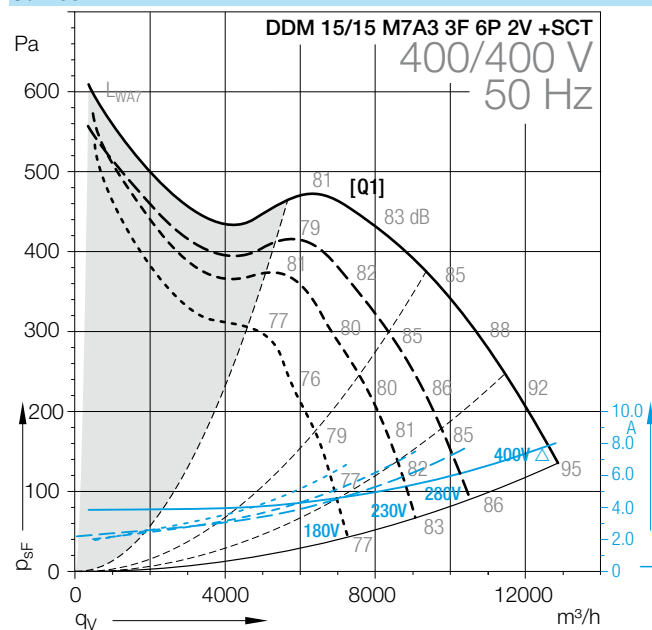

Dimensions in mm, Subject to change.

DDM 15/15 M7A3 3F 6P 2V +SCT

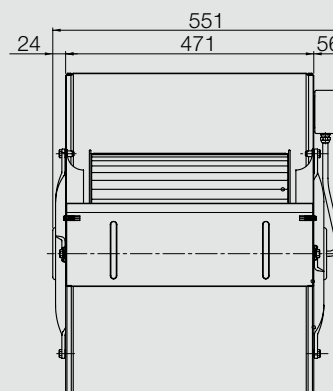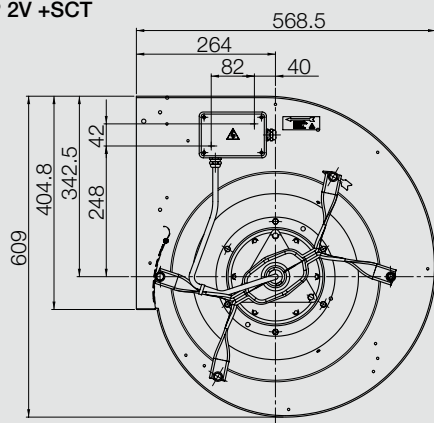

**Оформить
Заказ**

Ventilatorry.ru | zakaz@ventilatorry.ru | 8 (495) 133-95-09