

DDM 7/7**E6G3405 1F 4P 1V +SCT****Technical Data**

	Speed control	Curves	Nominal motor power W	Poles —	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 7/7 E6G3405										
1F 4P 1V +SCT	(2)	[G1/G2]	420	4	1~		50/60	623	2.6	1320

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. $^{\circ}\text{C}$	Fan weight kg	Density of media kg/m^3	Installation type (ISO 5801)	Article number
DDM 7/7 E6G3405										
1F 4P 1V +SCT	12.5	450	IP55	F	EXT	50	12	1.2	B	6M02WL

(1) = Speed controllable via Transformer

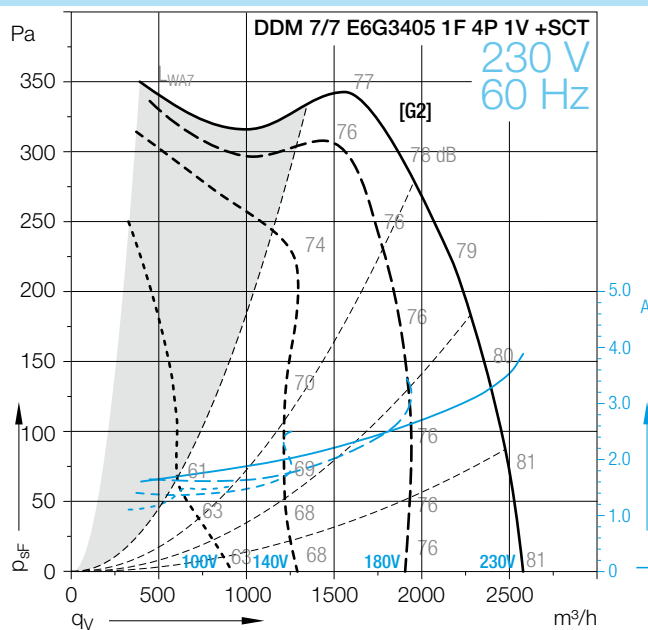
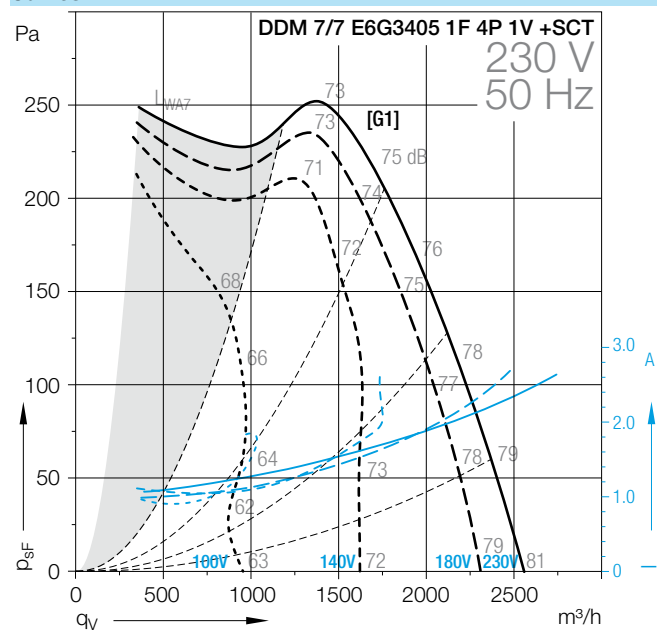
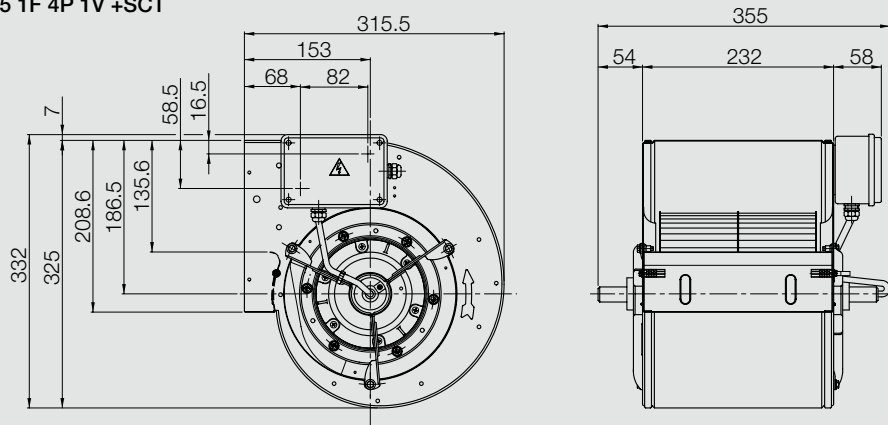
(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter

* = No speed control available

[H] High speed, [M] Medium speed, [L] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves**Dimensions** in mm, Subject to change.**DDM 7/7 E6G3405 1F 4P 1V +SCT**
**Оформить
Заказ**

DDM 7/7**E6G3304 1F 4P 1V +SCT****Technical Data**

	Speed control	Curves	Nominal motor power W	Poles -	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 7/7 E6G3304										
1F 4P 1V +SCT	(2)	[G3/G4]	300	4	1~		50/60	555	2.3	1260

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
DDM 7/7 E6G3304										
1F 4P 1V +SCT	10	450	IP55	F	EXT	40	12	1.2	B	6M02Y8

(1) = Speed controllable via Transformer

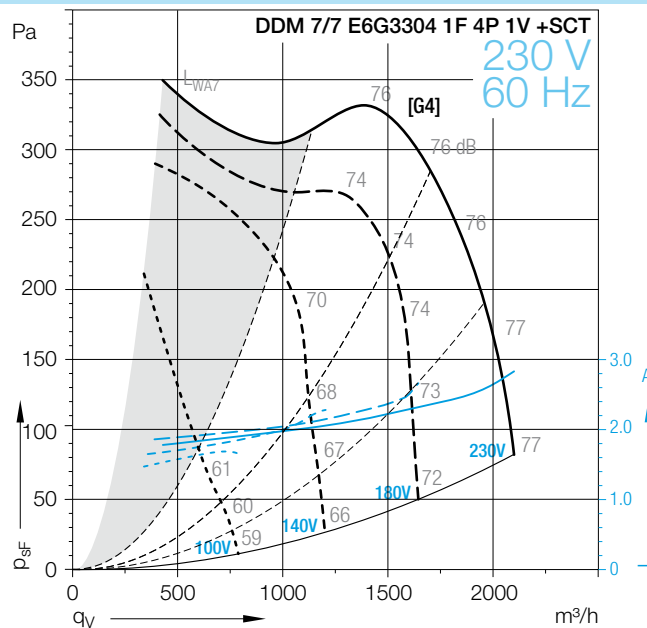
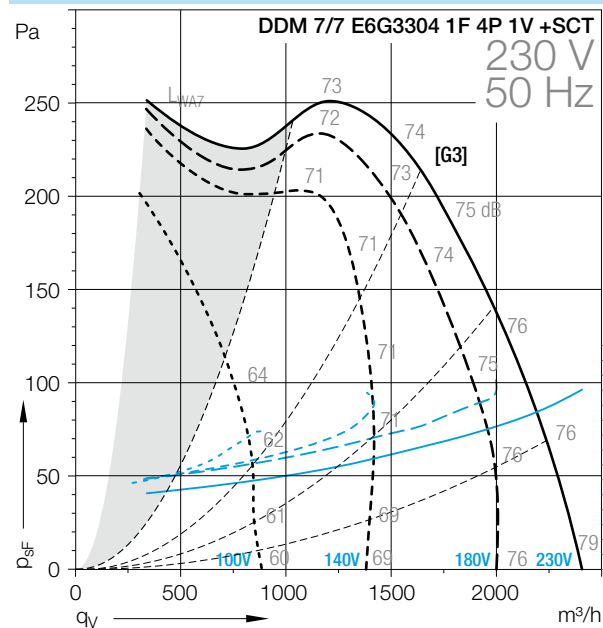
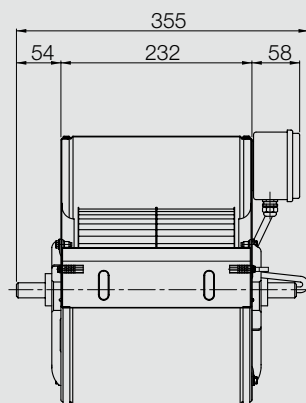
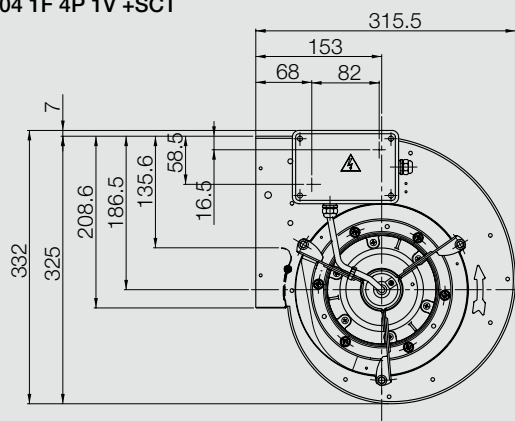
(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter

* = No speed control available

[H] High speed, [ME] Medium speed, [L] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves**Dimensions** in mm, Subject to change.**DDM 7/7 E6G3304 1F 4P 1V +SCT****Оформить
Заказ**

DDM 7/7 E5G3402 1F 4P 1V +SCT

Technical Data

	Speed control	Curves	Nominal motor power W	Poles	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 7/7 E5G3402										
1F 4P 1V +SCT	(2)	[G5]	184	4	1~		50	458	1.9	1250


Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. $^{\circ}C$	Fan weight kg	Density of media kg/m^3	Installation type (ISO 5801)	Article number
DDM 7/7 E5G3402										
1F 4P 1V +SCT	6.3	450	IP55	F	EXT	40	12	1.2	B	6M02L7


(1) = Speed controllable via Transformer
(2) = Speed controllable via TRIAC or Transformer
(3) = Speed controllable via Inverter
* = No speed control available
[H] High speed, [ME] Medium speed, [L] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

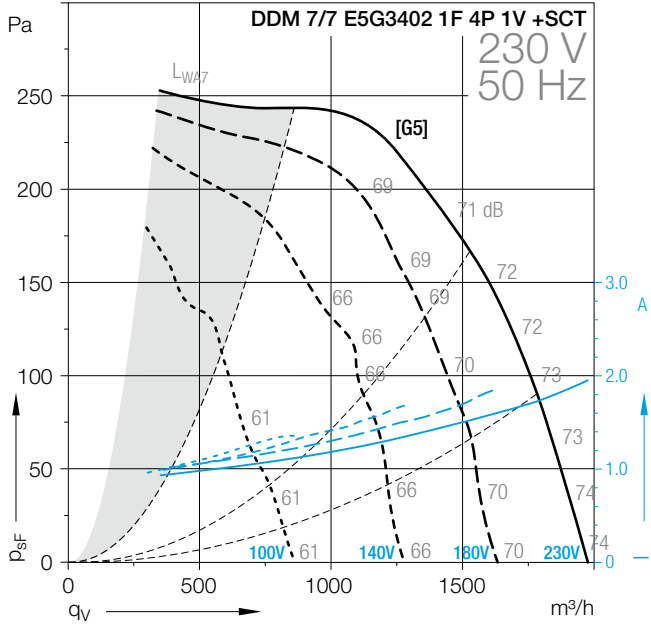Curves



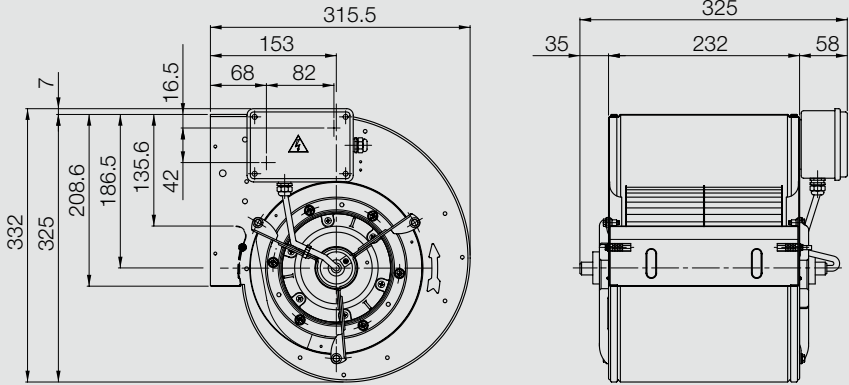Dimensions in mm, Subject to change.
DDM 7/7 E5G3402 1F 4P 1V +SCT



Оформить
Заказ

DDM 7/7

E5G3301 1F 4P 1V +SCT

Technical Data

	Speed control	Curves	Nominal motor power W	Poles —	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 7/7 E5G3301										
1F 4P 1V +SCT	(2)	[G7/G8]	147	4	1~		50/60	364	1.5	1200

Technical Data

DDM 7/7 E5G3301	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
1F 4P 1V +SCT	5	450	IP55	F	EXT	40	12	1.2	B	6M029M

(1) = Speed controllable via Transformer

(2) = Speed controllable via TRIAC or Transformer

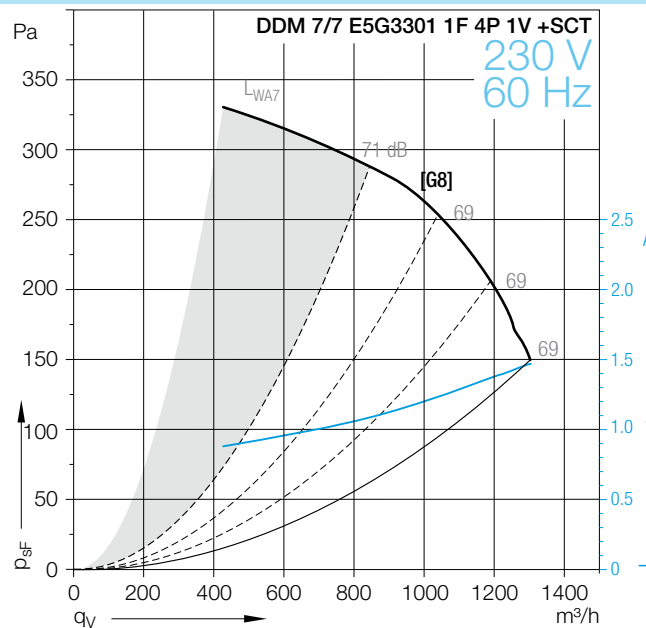
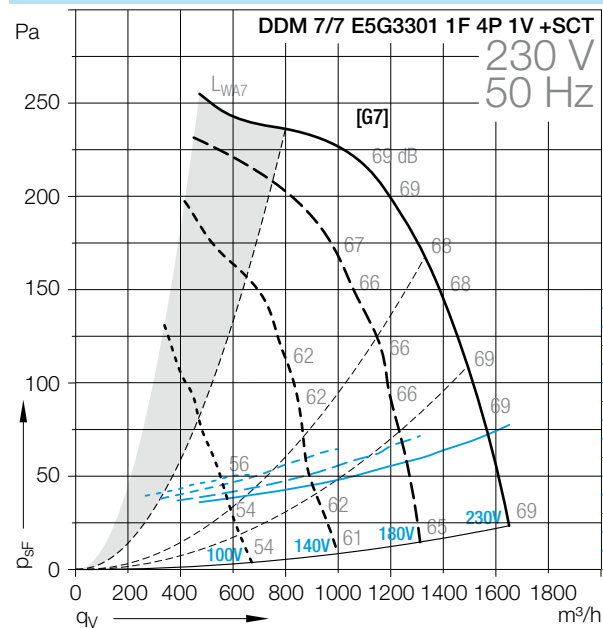
(3) = Speed controllable via Inverter

* = No speed control available

[HI] High speed, [ME] Medium speed, [LO] Low speed



Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves



Dimensions in mm, Subject to change.

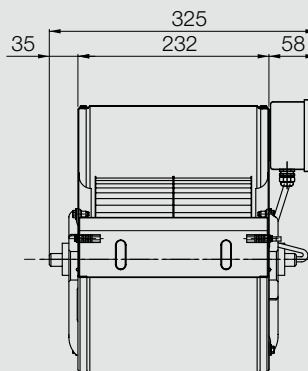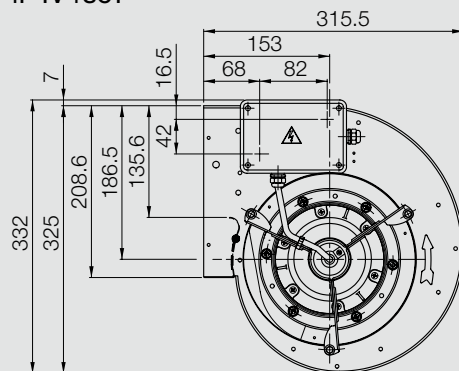DDM 7/7 E5G3301 1F 4P 1V +SCT



Оформить Заказ

Ventilatorry.ru | zakaz@ventilatorry.ru | 8 (495) 133-95-09

DDM 7/7 E6G3307 1F 4P 3V +SCT

Technical Data

	Speed control	Curves	Nominal motor power W	Poles	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 7/7 E6G3307										
1F 4P 3V +SCT	*	[G9]	184	4	1~		50	406	1.7	1230


Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. $^{\circ}C$	Fan weight kg	Density of media kg/m^3	Installation type (ISO 5801)	Article number
DDM 7/7 E6G3307										
1F 4P 3V +SCT	8	450	IP55	F	EXT	60	13	1.2	B	6M022U


(1) = Speed controllable via Transformer
(2) = Speed controllable via TRIAC or Transformer
(3) = Speed controllable via Inverter
* = No speed control available
[H] High speed, [ME] Medium speed, [LO] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

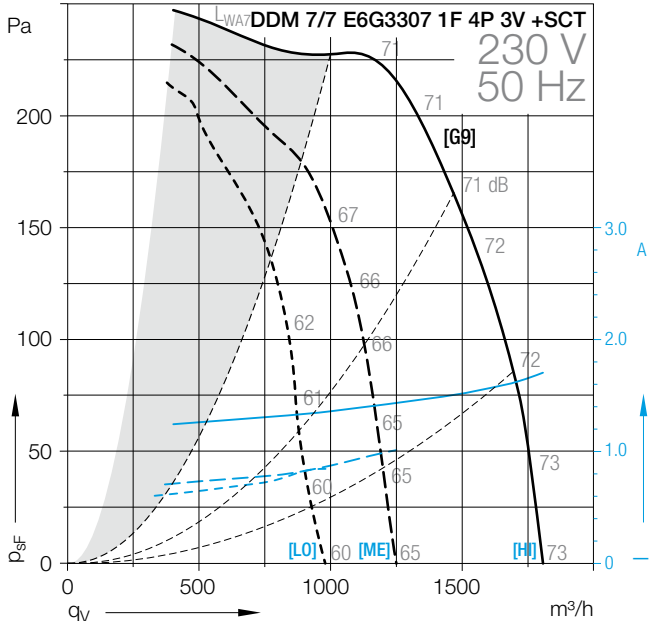Curves



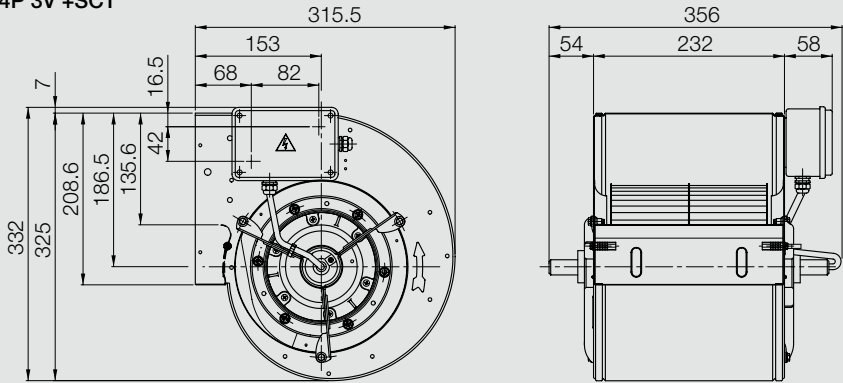Dimensions in mm, Subject to change.
DDM 7/7 E6G3307 1F 4P 3V +SCT



Оформить
Заказ

DDM 7/7

E5G3401 1F 4P 3V +SCT

Technical Data

	Speed control	Curves	Nominal motor power W	Poles —	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 7/7 E5G3401										
1F 4P 3V +SCT	*	[G11]	147	4	1~		50	358	1.5	1150

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. $^{\circ}C$	Fan weight kg	Density of media kg/m^3	Installation type (ISO 5801)	Article number
DDM 7/7 E5G3401										
1F 4P 3V +SCT	6.3	450	IP44	F	EXT	40	9	1.2	B	6M02U8

(1) = Speed controllable via Transformer

(2) = Speed controllable via TRIAC or Transformer

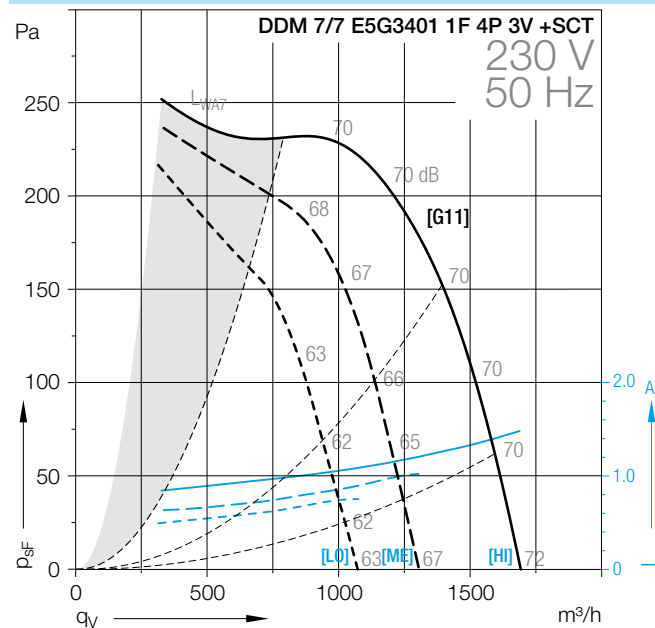
(3) = Speed controllable via Inverter

* = No speed control available

[H] High speed, [ME] Medium speed, [L] Low speed


Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves



Dimensions in mm, Subject to change.

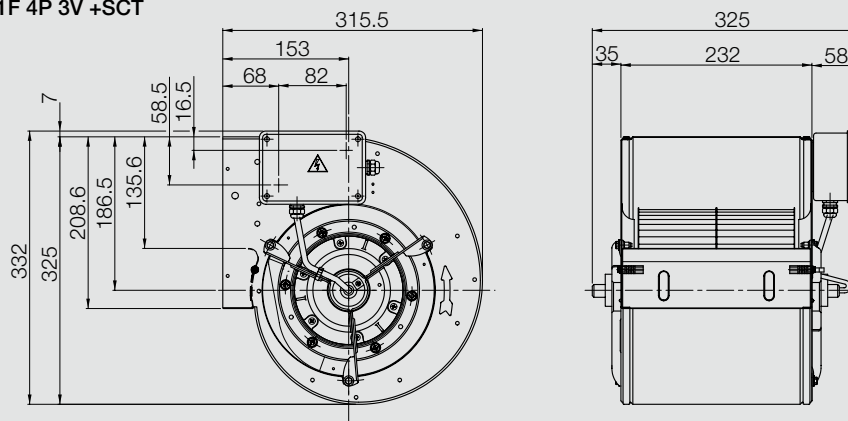DDM 7/7 E5G3401 1F 4P 3V +SCT



Оформить
Заказ

Ventilatorry.ru | zakaz@ventilatorry.ru | 8 (495) 133-95-09

DDM 7/7**E6G3309 3F 4P 1V +SCT****Technical Data**

	Speed control	Curves	Nominal motor power W	Poles —	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 7/7 E6G3309										
3F 4P 1V +SCT	*	[G13/G14]	300	4	3~	Δ/Y	50/60	605	1	1360

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. $^{\circ}\text{C}$	Fan weight kg	Density of media kg/m^3	Installation type (ISO 5801)	Article number
DDM 7/7 E6G3309										
3F 4P 1V +SCT			IP55	F	EXT	70	15	1.2	B	6M02WM

(1) = Speed controllable via Transformer

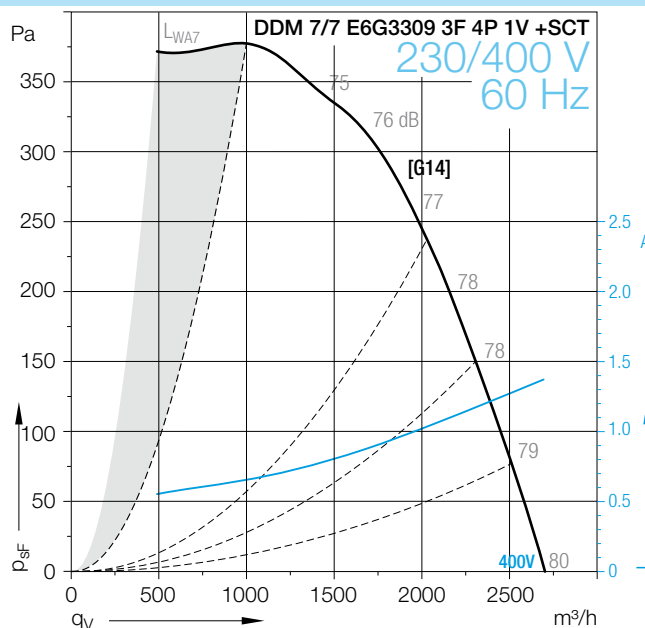
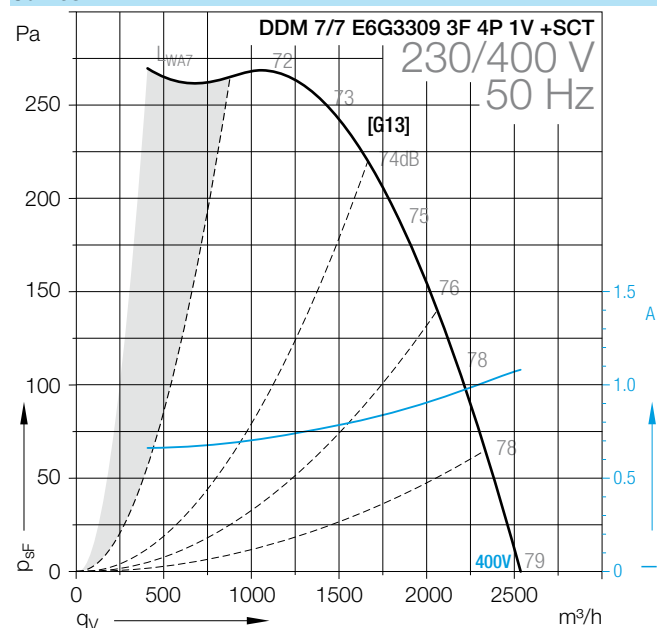
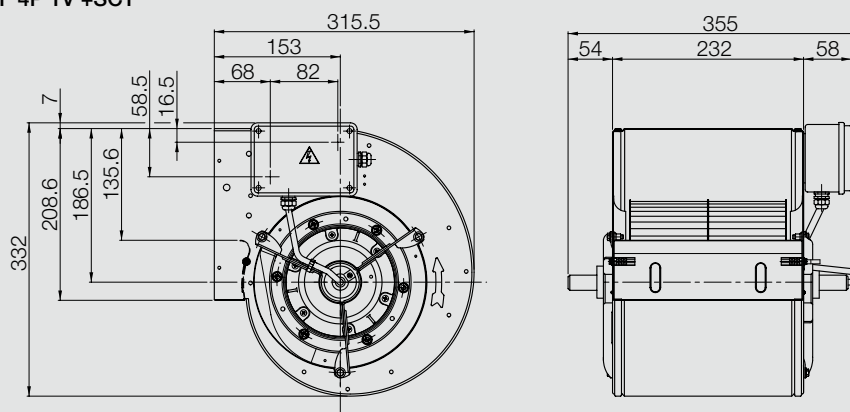
(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter

* = No speed control available

[H] High speed, [ME] Medium speed, [L] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves**Dimensions** in mm, Subject to change.**DDM 7/7 E6G3309 3F 4P 1V +SCT**
**Оформить
Заказ**

 Ventilatorry.ru | zakaz@ventilatorry.ru | 8 (495) 133-95-09

DDM 7/7

E5G3403 3F 4P 1V +SCT

Technical Data

	Speed control	Curves	Nominal motor power W	Poles -	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 7/7 E5G3403										
3F 4P 1V +SCT	*	[G15/G16]	147	4	3~	Δ/Y	50/60	413	0.7	1290

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
DDM 7/7 E5G3403										
3F 4P 1V +SCT			IP55	F	EXT	40	13	1.2	B	6M022H

(1) = Speed controllable via Transformer

(2) = Speed controllable via TRIAC or Transformer

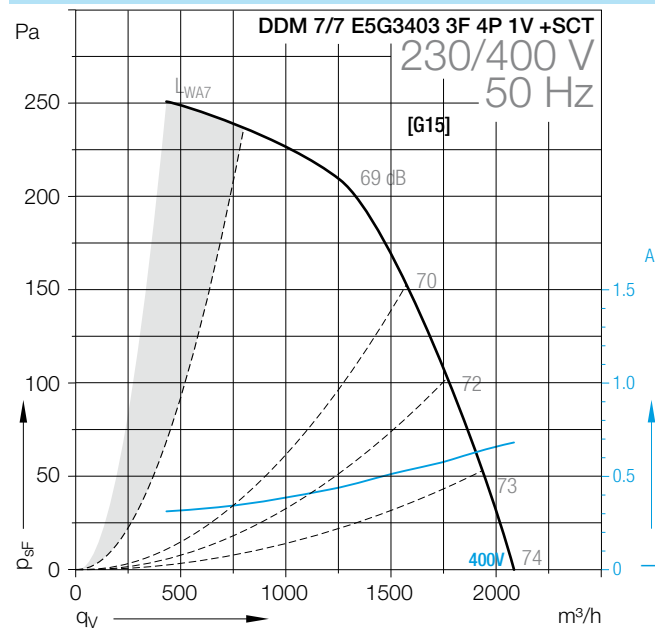
(3) = Speed controllable via Inverter

* = No speed control available

[H] High speed, [ME] Medium speed, [L] Low speed


Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves



Dimensions in mm, Subject to change.

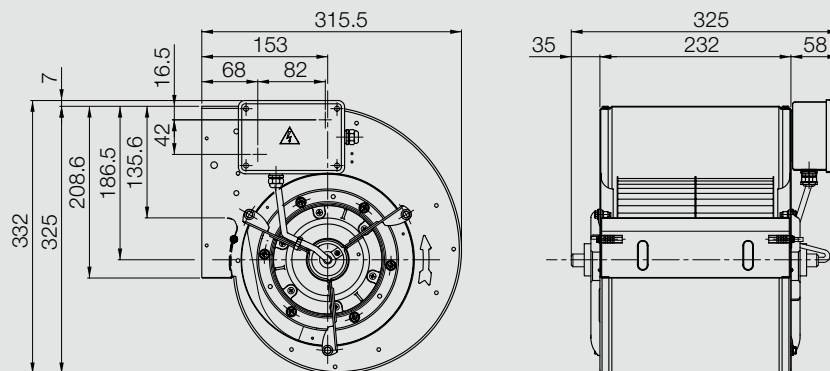DDM 7/7 E5G3403 3F 4P 1V +SCT



Оформить
Заказ

Ventilatorry.ru | zakaz@ventilatorry.ru | 8 (495) 133-95-09

DDM 7/7**E5G3302 1F 6P 1V +SCT****Technical Data**

	Speed control	Curves	Nominal motor power W	Poles —	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 7/7 E5G3302										
1F 6P 1V +SCT	(2)	[G17/G18]	90	6	1~		50/60	213	0.9	840

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. $^{\circ}\text{C}$	Fan weight kg	Density of media kg/m^3	Installation type (ISO 5801)	Article number
E5G3302 DDM 7/7										
1F 6P 1V +SCT	5	450	IP55	F	EXT	70	12	1.2	B	6M02Z4

(1) = Speed controllable via Transformer

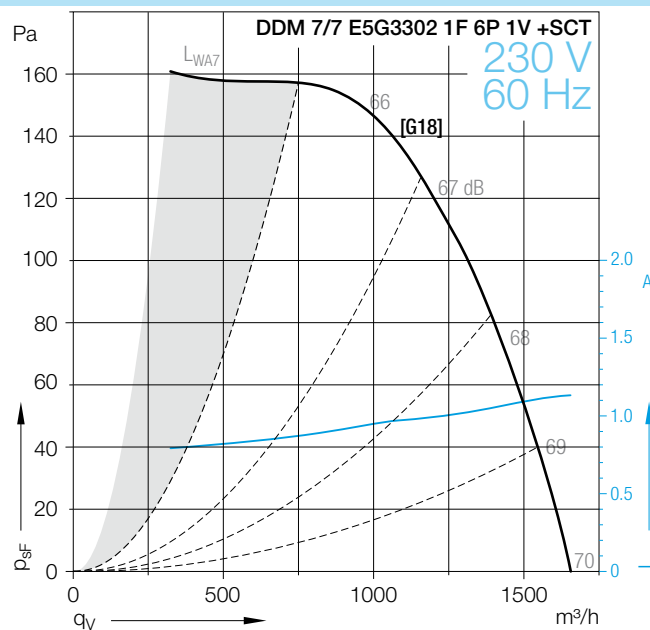
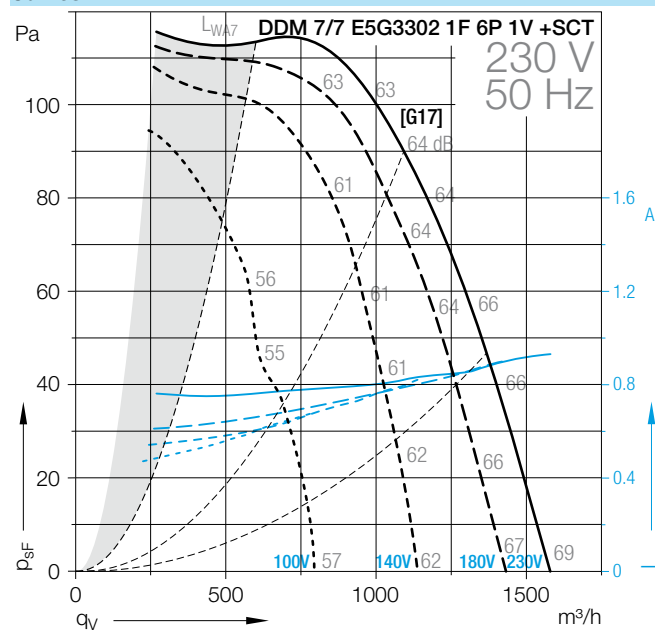
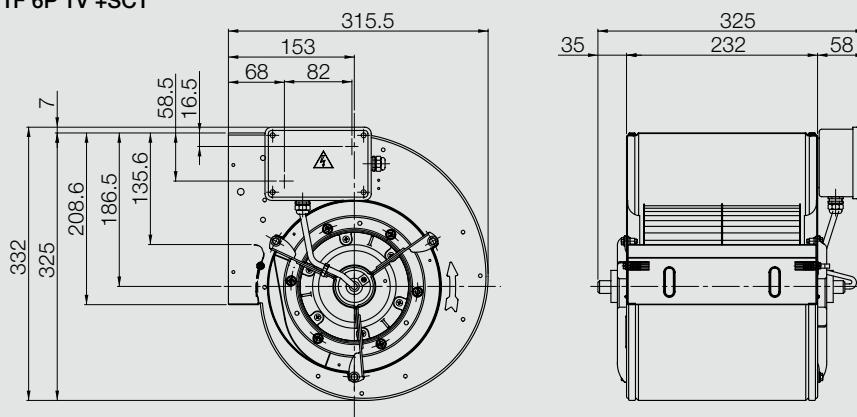
(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter

* = No speed control available

[H] High speed, [ME] Medium speed, [L] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves**Dimensions** in mm, Subject to change.**DDM 7/7 E5G3302 1F 6P 1V +SCT****Оформить
Заказ**Ventilatorry.ru | zakaz@ventilatorry.ru | 8 (495) 133-95-09