

RDH E_-0180

Performance certified is for installation type B - free inlet, ducted outlet.

Power rating (kW) does not include transmission losses.

Performance ratings do not include the effects of appurtenances (accessories).

Technical Data

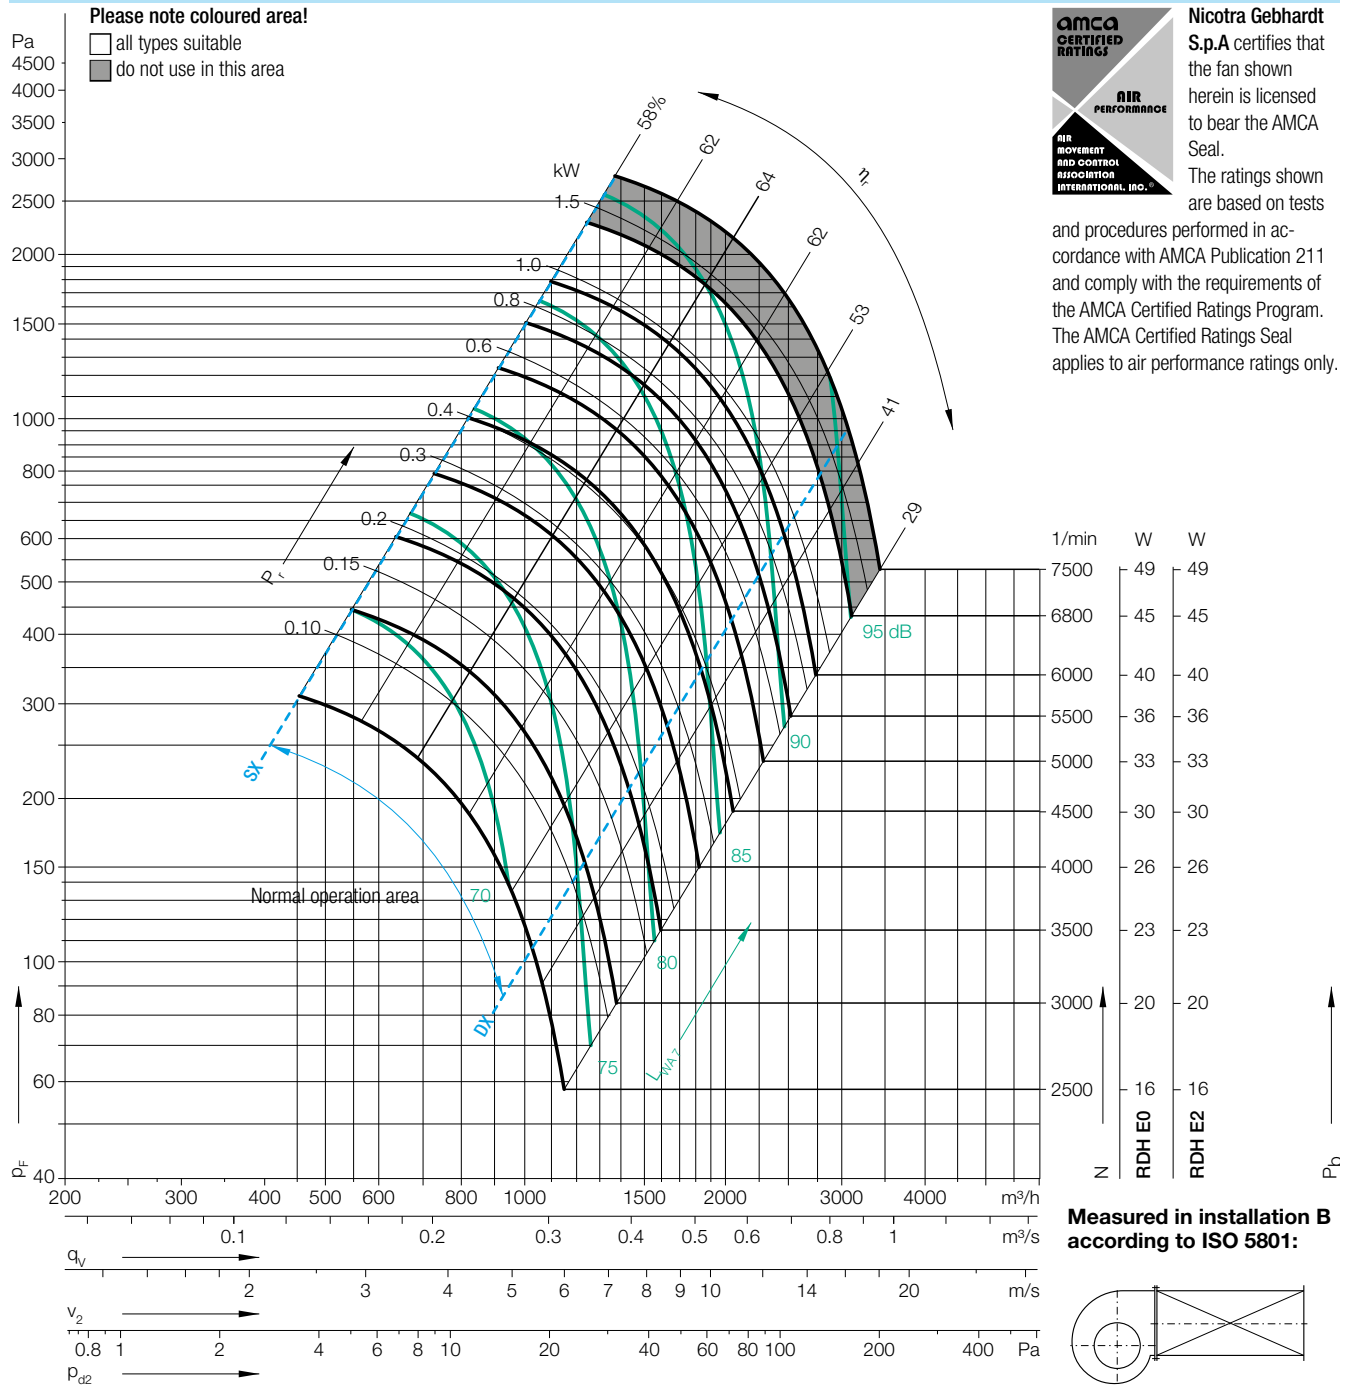
Impeller Data

Impeller diameter	D_r	180	mm
Number of blades	z	8	
Moment of Inertia	J	0,003	kgm ²

Impeller Data

Impeller weight	m	0,62	kg
Density of media	ρ_1	1,2	kg/m ³
Tolerance class (DIN 24166)		2	

Performance Curves



Nicotra Gebhardt S.p.A certifies that the fan shown herein is licensed to bear the AMCA Seal.

The ratings shown are based on tests

and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance ratings only.

Duty point	Speed 1/min	$\Delta L_{Wrel4}(A)$ dB
SX	6000	4
SX	4500	3
SX	3000	2
$Q_{V,opt}$	6000	3
$Q_{V,opt}$	4500	2
$Q_{V,opt}$	3000	1
DX	6000	2
DX	4500	1
DX	3000	1

Relative sound power level for inlet side L_{Wrel7} at octave centre frequencies f_c

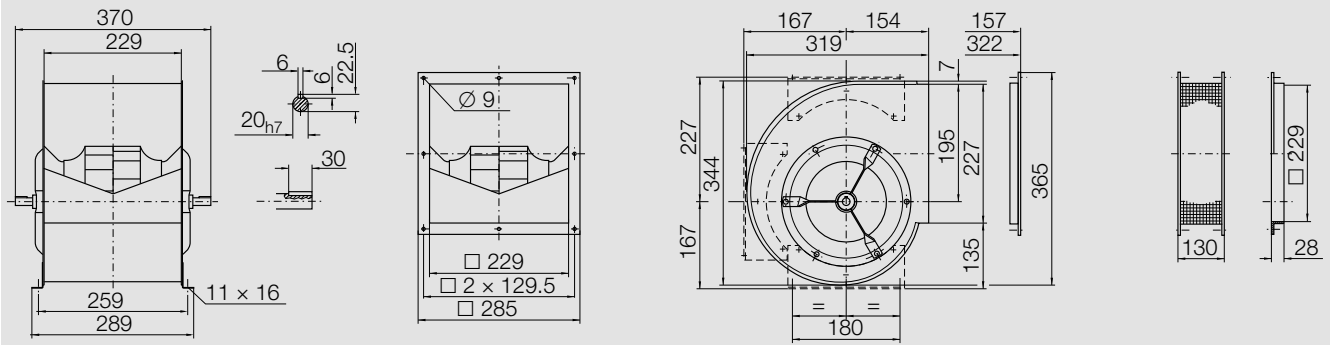
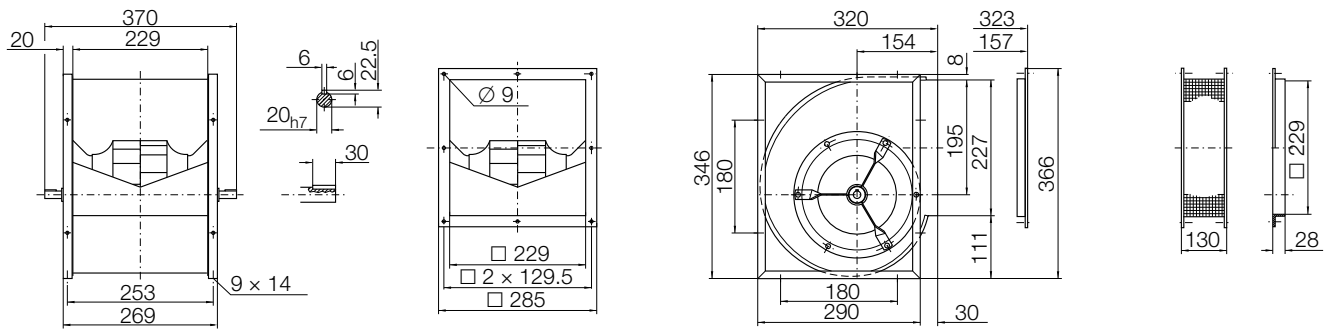
	63	125	250	500	1000	2000	4000	8000	Hz
-14	-6	-2	-5	-5	-6	-11	-17		dB
-9	-2	-3	-3	-5	-8	-12	-18		dB
-3	0	-3	-3	-4	-9	-15	-21		dB
-17	-8	-3	-5	-6	-5	-12	-17		dB
-11	-4	-3	-4	-4	-8	-13	-18		dB
-5	-0	-3	-4	-3	-10	-15	-22		dB
-21	-11	-6	-4	-6	-5	-11	-16		dB
-15	-7	-5	-4	-4	-8	-12	-17		dB
-9	-4	-2	-4	-3	-9	-14	-21		dB

Relative sound power level for discharge side L_{Wrel4} at octave centre frequencies f_c

	63	125	250	500	1000	2000	4000	8000	Hz
15	8	3	3	-5	-6	-10	-17		dB
16	5	5	2	-6	-6	-12	-19		dB
10	6	5	-3	-4	-8	-15	-22		dB
8	6	5	1	-7	-6	-12	-21		dB
10	6	5	0	-6	-7	-16	-22		dB
8	7	3	-5	-4	-10	-19	-25		dB
5	3	-2	1	-7	-6	-9	-19		dB
7	1	0	-1	-6	-6	-12	-21		dB
5	0	3	-5	-4	-7	-17	-26		dB



Оформить
Заказ

RDH E_-0180**Dimensions** in mm, subject to change.**RDH E0-0180** 5.3 kg**RDH E2-0180** 7.1 kg
**Оформить
Заказ**