
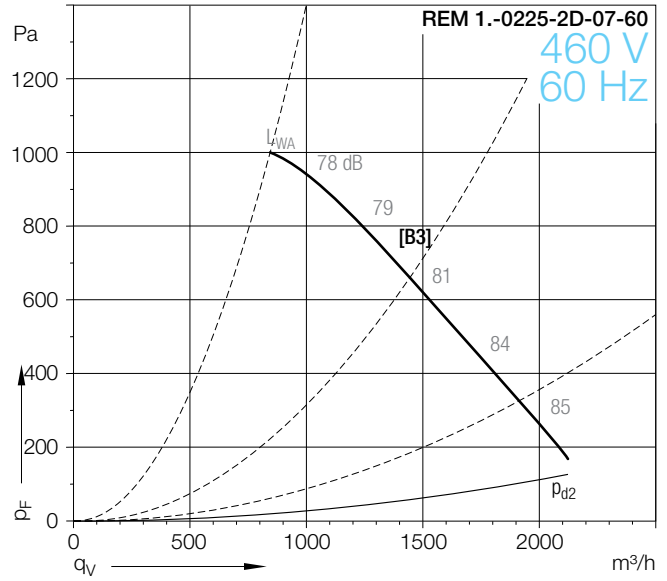
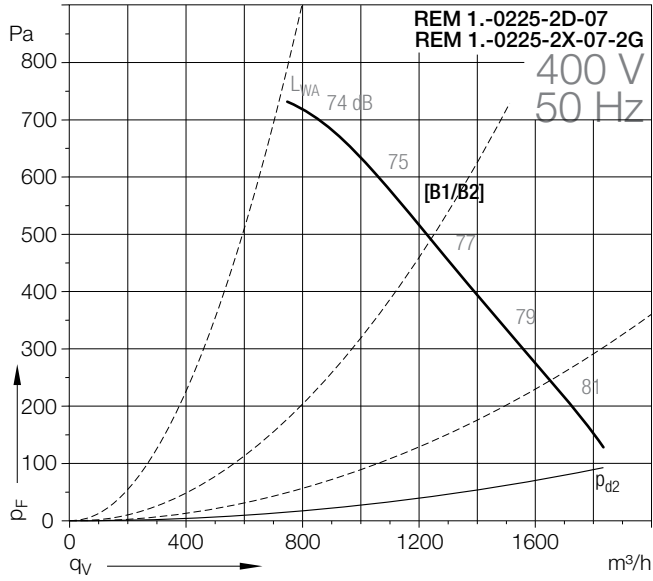


REM 11-0225
REM 13-0225

REM 18-0225
REM 19-0225

Curves

Density of media **1.2 kg/m³**.
Measured in installation **B** according to **ISO 5801** (ducted).



REM 11-0225
REM 13-0225

REM 18-0225
REM 19-0225

Technical Data												
REM	Curves	Nominal motor power kW	Poles	Motor size	Motor voltage V	Nominal frequency Hz	Connection	Nominal motor current A	Nominal motor speed 1/min	Max. media Temperature °C	Max. volume flow m³/h	Weight REM 11/13/18/19 kg
11-/13-/18-/19-0225-2D-07	[B1]	0.37	2	71	230/400	50	Δ/Y	1.73/1.00	2740	60	1880	11/13/16/18
Ex II 3G c IIB T3												
REM	Curves	Nominal motor power kW	Poles	Motor size	Motor voltage V	Nominal frequency Hz	Connection	Nominal motor current A	Nominal motor speed 1/min	Max. media Temperature °C	Max. volume flow m³/h	Weight REM 11/13/18/19 kg
11-/13-/18-/19-0225-2X-07-2G	[B2]	0.37	2	71	230/400	50	Δ/Y	1.61/0.93	2825	60	1880	11/13/16/18
60 Hz												
REM	Curves	Nominal motor power kW	Poles	Motor size	Motor voltage V	Nominal frequency Hz	Connection	Nominal motor current A	Nominal motor speed 1/min	Max. media Temperature °C	Max. volume flow m³/h	Weight REM 11/13/18/19 kg
11-/13-/18-/19-0225-2D-07-60	[B3]	0.43	2	71	460	60	Y	1.00	3288	60	2170	11/13/16/18

Motor protection can take place through motor protection units with bi-metallic releases (EUM 33) or via a thermistor (NTC) temperature sensor in connection with a thermistor (NTC)-release device (EUM 03). See chapter "Accessories".

The direction of rotation is determined looking from the drive side. Anti-clockwise rotation, symbol **LG**. Clockwise rotation, symbol **RD**.

Dimensions in mm, subject to change.

