
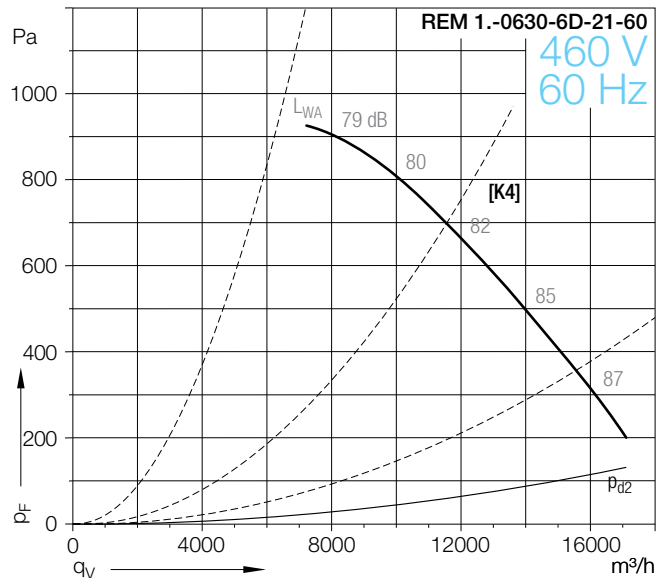
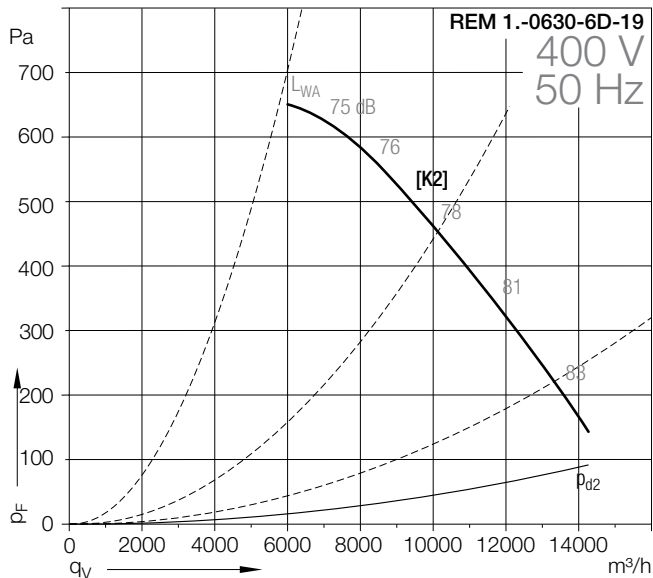
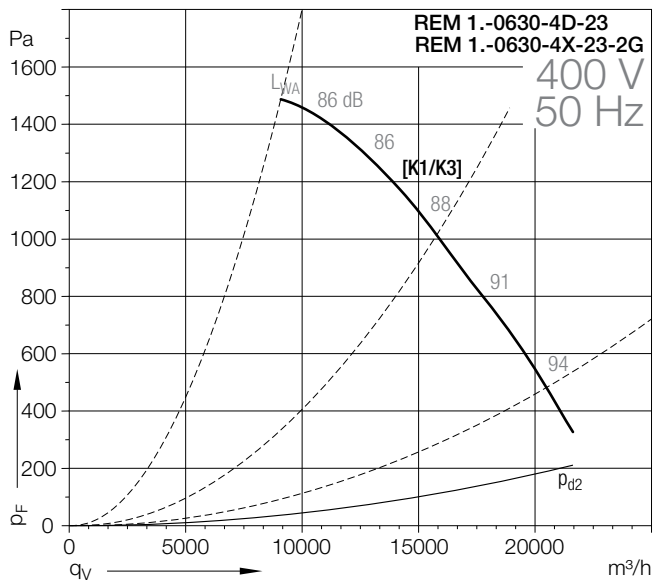


**REM 11-0630**  
**REM 13-0630**

**REM 18-0630**  
**REM 19-0630**

**Curves**

Density of media **1.2 kg/m<sup>3</sup>**.  
Measured in installation **B** according to **ISO 5801** (ducted).



# REM 11-0630 REM 13-0630

# REM 18-0630 REM 19-0630

Technical Data												
REM	Curves	Nominal motor power kW	Poles	Motor size	Motor voltage V	Nominal frequency Hz	Connection	Nominal motor current A	Nominal motor speed 1/min	Max. media Temperature °C	Max. volume flow m³/h	Weight REM 11/13/18/19 kg
11-/13-/18-/19-	[K1]	7.50	4	132 M	400	50	△	14.80	1465	60	21750	-/130/-/-
0630-4W-23	[K1]	7.50	4	132 M	400	50	△	14.80	1465	60	21750	-/130/-/-
0630-6W-19	[K2]	2.20	6	112 M	230/400	50	△/Y	9.00/5.20	965	60	14280	99/107/155/163
Ex II 3G c IIB T3	Curves	Nominal motor power kW	Poles	Motor size	Motor voltage V	Nominal frequency Hz	Connection	Nominal motor current A	Nominal motor speed 1/min	Max. media Temperature °C	Max. volume flow m³/h	Weight REM 11/13/18/19 kg
REM 13-	[K3]	6.80	4	132 M	400/690	50	△/Y	14.00/8.10	1460	60	22370	-/135/-/-
0630-4X-23-2G	[K3]	6.80	4	132 M	400/690	50	△/Y	14.00/8.10	1460	60	22370	-/135/-/-
60 Hz	Curves	Nominal motor power kW	Poles	Motor size	Motor voltage V	Nominal frequency Hz	Connection	Nominal motor current A	Nominal motor speed 1/min	Max. media Temperature °C	Max. volume flow m³/h	Weight REM 11/13/18/19 kg
REM 11-/13-/18-/19-	[K4]	3.45	6	132 S	460	60	Y	6.70	1170	60	17120	108/116/164/172
0630-6W-21-60	[K4]	3.45	6	132 S	460	60	Y	6.70	1170	60	17120	108/116/164/172

For "REM ...0630-4D-23" and "...4X-23-2G" only model "13-" available!  
 Motor protection can take place through motor protection units with bi-metallic releases (EUM 33) or via a thermistor (NTC) temperature sensor in connection with a thermistor (NTC)-release device (EUM 03). See chapter "Accessories".

The direction of rotation is determined looking from the drive side.  
 Anti-clockwise rotation, symbol **LG**. Clockwise rotation, symbol **RD**.

**Dimensions** in mm, subject to change.

**REM 11-0630**  
**REM 13-0630**

	k2
71	210
80	252
90 S	297
90 L	297
100 L	336
112 M	329
132 S	385
132 M	385

**REM 18-0630**  
**REM 19-0630**