


Powerful centrifugal fans for universal use

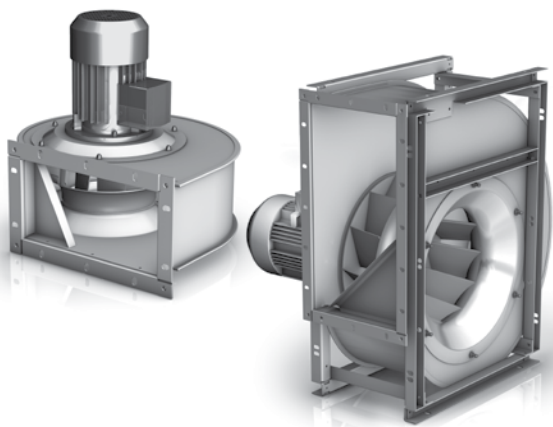

The product ranges REM

The fan ranges REM offered by Nicotra Gebhardt do present a large fan programme of single inlet centrifugal fans which are universally usable for many ventilation purposes either in HVAC or in machinery design industry and heavy duty installation business.

The fans are available with with impellers equipped with backward curved blades. The fans are equipped with IEC flanged (B5) standard motors, protection IP55, class F, and they are suitable for frequency inverter controlled operation.

Benefits:

- ▶ compact design because of direct drive
- ▶ cost effective by maintenance-free operation
- ▶ speed controlled by frequency inverter
- ▶ universally usable due to different options, such as
 - ▶ without brackets as a directly fitted unit for operation with vertical shaft arrangement
 - ▶ with brackets for operation with horizontal shaft
- ▶ ATEX execution for explosion hazardous areas and applications
Ex II 2G c IIB T3



Оформить
Заказ

Ventilatorry.ru | zakaz@ventilatorry.ru | 8 (495) 133-95-09







The universal technology for various applications

REM ranges

- Sizes from 0200 up to 0630
- Volume flow up to 20,000m³/h
- also in available 60Hz execution
- also available in ATEX execution 2G
- motor with PTC in flange execution
- Impeller with backward curved blades

For applications in the filter technologie, drying- and suction plants.

For every application, the suitable fan:

Version	Description	Figure
REM 11-0200/-0630	Lap jointed scroll of galvanised sheet steel with discharge flange and built-in impeller with backward curved aerofoil blades, without pedestal, for vertical or horizontal mounting.	
REM 18-0200/-0630	Lap jointed scroll of galvanised sheet steel with discharge flange and built-in impeller with backward curved aerofoil blades, with pedestal, for horizontal mounting.	
REM 13-0200/-0630	Scroll casing stitch welded with discharge flange, epoxy coated, built-in impeller with backward curved aerofoil blades, without pedestal, for vertical or horizontal mounting.	
REM 19-0200/-0630	Scroll casing stitch welded with discharge flange, epoxy coated, built-in impeller with backward curved aerofoil blades, with pedestal, for horizontal mounting.	
REM 41-0200/-0450	Lap jointed scroll of galvanised sheet steel with discharge flange and built-in impeller with backward curved blades, without pedestal, for vertical or horizontal mounting.	
REM 48-0200/-0450	Lap jointed scroll of galvanised sheet steel with discharge flange and built-in impeller with backward curved blades, with pedestal, for horizontal mounting.	



Оформить
Заказ

Ventilatorry.ru | zakaz@ventilatorry.ru | 8 (495) 133-95-09