
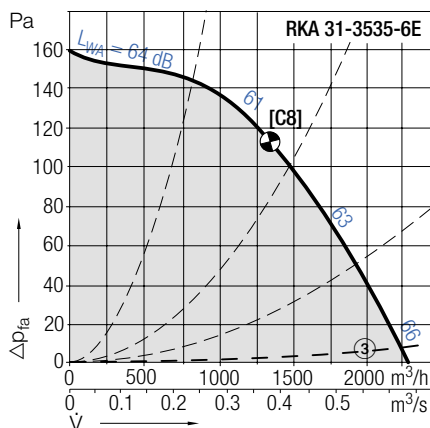
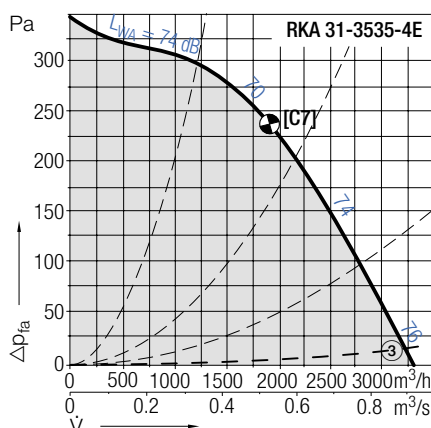
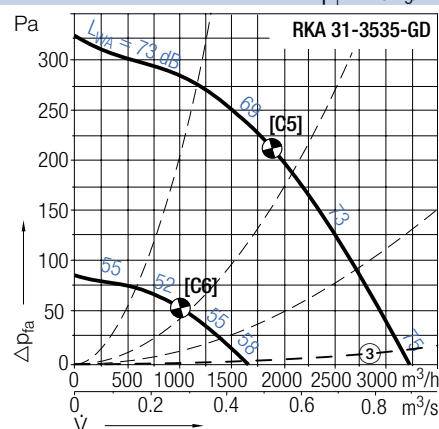
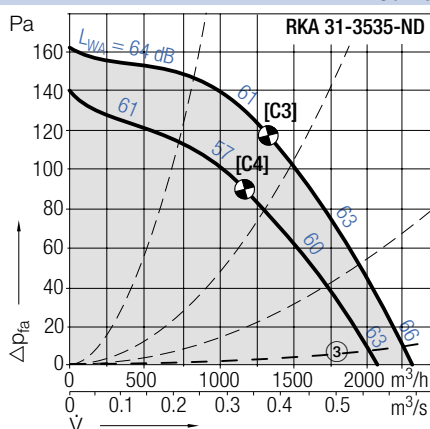


RKA 31-/32-3535

RKA verovent		Tekniska data (V_{max} / L_{WA8} giltig för RKA 31)							Technical Data (V_{max} / L_{WA8} valid to RKA 31)					
Kurvor	Pol-tal	Spänning/anslutning	Frekvens	Varvtal	Max. effektförbrukning	Märkström	Startström/Märkström	V_{max}	L_{WA8} vid V_{max}	Kondensator	Skyddsklass/Isolationskl.	Vikt 31-/32-	Medi-tem-p.	
Curves	Poles	Voltage/Connection	Fre-quency	Speed	Max. power consumption	Nominal current	Starting/Full load current	V_{max}	L_{WA8} at V_{max}	Capa-citor	Protection/Temp. class	Weight 31-/32-	Media temp.	
RKA 31-/32-	V	Hz	v/min	kW	A	m³/h			dB	µF		kg	°C	
3535-MD• [C1][C2]	4/4	400, 3~ Δ/Y	50	1340/1080	0.35/0.22	0.75/0.39	2.7	3300/2770	76/71	-	IP44/B	33/34	-20...+40	
3535-ND• [C3][C4]	6/6	400, 3~ Δ/Y	50	940/ 820	0.17/0.09	0.50/0.18	2.2	2290/2060	66/63	-	IP44/B	33/34	-20...+40	
3535-GD [C5][C6]	4/8	400, 3~ YY/Y	50	1280/ 670	0.33/0.06	0.56/0.15	2.3	3190/1650	75/58	-	IP54/F	33/34	-20...+40	
3535-4E• [C7]	4	230, 1~	50	1340	0.40	1.9	1.8	3300	76	8	IP44/B	34/35	-20...+40	
3535-6E• [C8]	6	230, 1~	50	930	0.15	0.72	1.7	2270	66	4	IP44/B	37/38	-20...+40	

• (även) steglöst varvtalsreglerbar med spänning | • (also) stepless speed controllable by tension variation

RKA verovent Kurvor Curves $\rho_1=1.15 \text{ kg/m}^3$

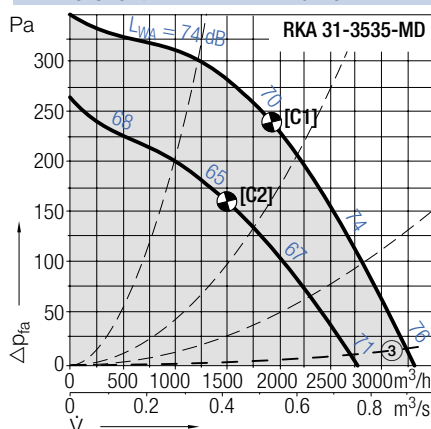

RKA verovent		Tillbehör				Accessories		
Arbets-brytare	Motorskydds-brytare	Transformator 7-steps	Transformator 5-steps	Vridtyristor	Varvtalsregl. elektronisk	Varvtalsregl. mikroprocessor	Varvtalsregl. elektronisk	
Isolator	Motor protection unit	Transformer 7 taps	Transformer 5-steps	Speed regulator electronic	Speed regulator electronic	Speed regulator micro processor	Speed controller electronic	
RKA 31-/32- ESH	ESM	ETO	ETH	EPH	EPA	EPA	EPA	
3535-MD•	21-0030-65	04-0040-8D	10-0010-8D	35-0010-8D	-	-	-	83-0050-8D
3535-ND•	21-0030-65	04-0040-8D	10-0010-8D	35-0010-8D	-	-	-	83-0050-8D
3535-GD	21-0030-65	03-0040-8D ⑥	-	-	-	-	-	-
3535-4E•	21-0030-22	-	10-0040-5E	31-0020-5E	03-0020-5E	03-0060-5E	93-0023-5E	83-0060-5E
3535-6E•	21-0030-22	-	10-0018-5E	31-0020-5E	03-0010-5E	03-0060-5E	93-0023-5E	83-0060-5E



Оформить
Заказ

RKA 31-/32-3535

RKA verorent



RKA 31- verorent

Gebhardt ytterrotormotor med monterat radialfläkthjul.

RKA 32- verorent

Extra ljudabsorberande beklädnad för reducering av ljud-effektnivån med 6 dB(A) på avluftssidan.

Flödet reduceras vid samma tryckökning med 5 % jämfört med typ RKA 31.

Tillbehör / Index

- Vid användning av spjäll ZLK tillsammans med stosljud-dämpare ZDS, skall mellan-stycke ZKK användas
- Lutning upp till 45° i steg om 5° är möjlig
- Tryckfall i spjäll
- En skyddsfunktion vid högt varvtal garanteras endast om en Dahlander-brygga finns

RKA 31- verorent

Gebhardt external rotor motor with impeller fitted directly.

RKA 32- verorent


Additionally equipped with sound absorbing lining for A-sound power level reduction of 6 dB at discharge. Compared to RKA 31 the flow rate is 5 % lower for the same pressure rise.

Accessories / Index

- When using back draught damper ZLK in connection with silencer upstand ZDS a spacer ZKK is required
- inclination in 5° steps up to 45° possible
- Pressure loss at back draught damper
- A protection for high speed is only active if Dahlander bridge is on place

Mått i mm, vi förbehåller oss rätten till ändringar.

RKA 31-/32-3535-..



Dimensions in mm, Subject to change.



G-350 [St]

Takgenomföring inkl. fällbar stosram

*EI30/EI60

Roof duct with Foldable frame

*EI30/EI60

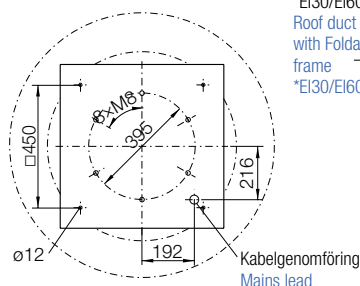


Tillbehör

ZBS 01-0056 [Al] 5 kg

ZBS 20-0056 [St] 10 kg

Stos för platta tak


Flat roof upstand



ZBS 23-0056 [St] 14 kg

Stos för platta tak, hög


Flat roof upstand tall



ZBS 09-0056-② [Al] 6 kg

Stos för snedtak


Inclined roof upstand



ZBS 11-0056 [GFK] 12 kg

Stos för korrugerat tak

Soaker sheet WDS




ZDS 01-0056 [Al] 29 kg

ZDS 20-0056 [St] 40 kg

Stosljuddämpare

Upstand silencer

①




ZDS 09-0056-② [Al] 29 kg

Stosljuddämpare för snedtak

Inclined roof upstand silencer

①

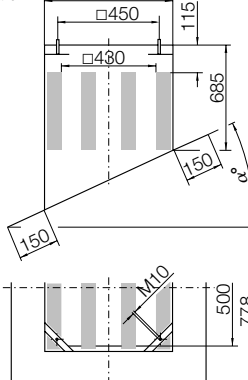


ZDR 30-0355 17 kg

Ljuddämpare inloppssida

Inlet silencer

①




ZKD 01-0355 3.5 kg

Inloppskona med fläns

Flanged inlet cone

①




ZKK 20-0056 [St] 14 kg

Mellanstycke

Spacer

①




ZBU 01-0056-35 [St] 6 kg

Anslutningsplatta

Connection plate

①




ZKE 11-0355 2.1 kg

Dukstos, inlopp

Inlet connection (flexible)

①




ZKF 11-0355 0.9 kg

Motfläns, inlopp

Mating flange

①




ZLK 01-0355 7 kg

Självstängande backspjäll

Automatic shutter

①




ZLK 21-0355 11 kg

Motormanövrerat spjäll

Motor drive shutter

①




ZSG 04-0355 0.6 kg

Inloppsgaller

Mesh inlet guard

①



Оформить
Заказ