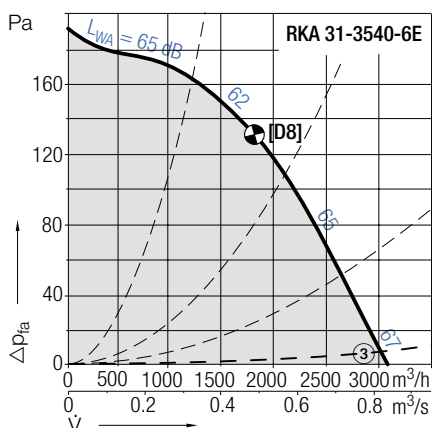
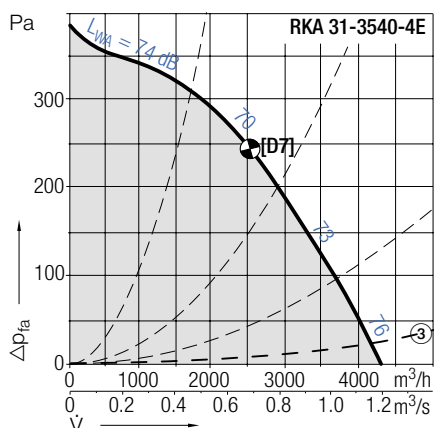
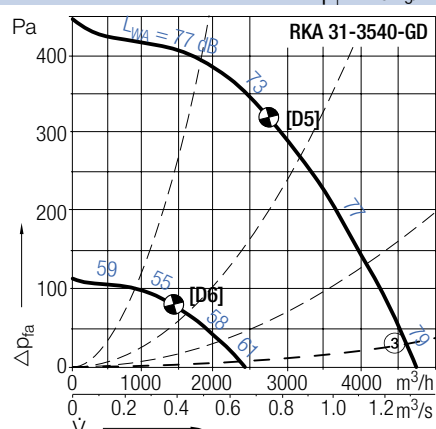
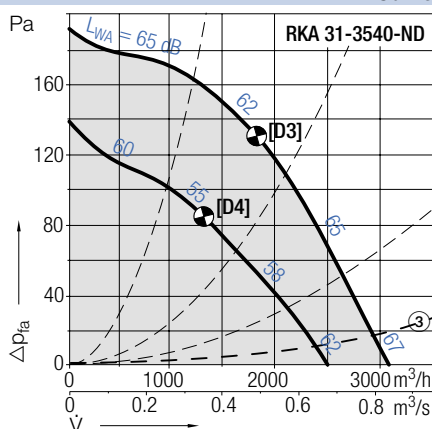
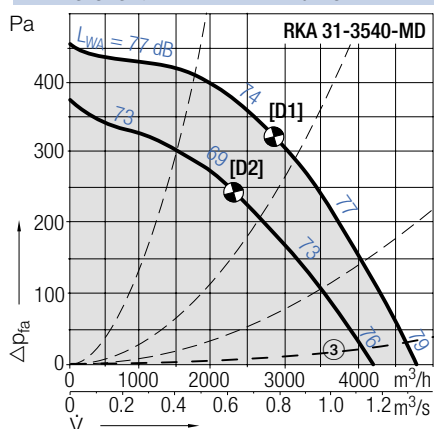


RKA 31-/32-3540

RKA verovent		Tekniska data (V _{max} / L _{WA8} giltig för RKA 31)							Technical Data (V _{max} / L _{WA8} valid to RKA 31)					
Kurvor	Pol-tal	Spänning/anslutning	Frekvens	Varvtal	Max. effektförbrukning	Märkström	Startström/Märkström	V _{max}	L _{WA8} vid V _{max}	Kondensator	Skyddsklass/Isolationskl.	Vikt 31-/32-	Mediatemp.	
Curves	Poles	Voltage/Connection	Frequency	Speed	Max. power consumption	Nominal current	Starting/Full load current	V _{max}	L _{WA8} at V _{max}	Capacitor	Protection/Temp. class	Weight 31-/32-	Media temp.	
RKA 31-/32-	V	Hz	v/min	kW	A	m³/h			dB	µF		kg	°C	
3540-MD• [D1ID2]	4/4	400, 3~ Δ/Y	50	1400/1190	0.58/0.44	1.35/0.74	3.4	4780/4210	79/76	-	IP44/B	41/42	-20...+40	
3540-ND• [D3ID4]	6/6	400, 3~ Δ/Y	50	890/ 690	0.22/0.13	0.55/0.23	2.0	3070/2490	67/62	-	IP44/B	42/43	-20...+40	
3540-GD [D5ID6]	4/8	400, 3~ YY/Y	50	1380/ 700	0.62/0.12	1.20/0.38	3.7	4730/2390	79/61	-	IP54/F	41/42	-20...+40	
3540-4E• [D7]	4	230, 1~	50	1220	0.52	2.3	1.8	4290	76	12	IP44/B	42/43	-20...+40	
3540-6E• [D8]	6	230, 1~	50	890	0.20	0.91	1.7	3070	67	5	IP44/B	39/40	-20...+40	

• (även) steglöst varvtalsreglerbar med spänning | • (also) stepless speed controllible by tension variation

RKA verovent Kurvor Curves $\rho_1=1.15 \text{ kg/m}^3$ 

RKA verovent		Tillbehör				Accessories		
Arbets-brytare	Motorskydds-brytare	Transformator 7-steps	Transformator 5-steps	Vridtyrystor	Varvtalsregl. elektronisk	Varvtalsregl. mikroprocessor	Varvtalsregl. elektronisk	
Isolator	Motor protection unit	Transformer 7 taps	Transformer 5-steps	Speed regulator electronic	Speed regulator electronic	Speed regulator micro processor	Speed controller electronic	
RKA 31-/32- ESH	ESM	ETO	ETH	EPH	EPA	EPA	EPA	
3540-MD•	21-0030-65	04-0040-8D	10-0020-8D	35-0020-8D	-	-	83-0050-8D	
3540-ND•	21-0030-65	04-0040-8D	10-0010-8D	35-0010-8D	-	-	83-0050-8D	
3540-GD	21-0030-65	03-0040-8D⑥	-	-	-	-	-	
3540-4E•	21-0030-25	01-0020-5E	10-0040-5E	35-0040-5E	03-0040-5E	03-0060-5E	93-0023-5E	83-0060-5E
3540-6E•	21-0030-22	-	10-0018-5E	31-0020-5E	03-0010-5E	03-0060-5E	93-0023-5E	83-0060-5E



Оформить
Заказ

RKA 31-/32-3540

RKA verorent



RKA 31- verorent

Gebhardt ytterrotormotor med monterat radialfläkthjul.

RKA 32- verorent

Extra ljudabsorberande beklädnad för reducering av ljud-effektnivån med 6 dB(A) på avluftssidan.

Flödet reduceras vid samma tryckökning med 5 % jämfört med typ RKA 31.

Tillbehör / Index

- Vid användning av spjäll ZLK tillsammans med stosljud-dämpare ZDS, skall mellan-stycke ZKK användas
- Lutning upp till 45° i steg om 5° är möjlig
- Tryckfall i spjäll
- En skyddsfunktion vid högt varvtal garanteras endast om en Dahlander-brygga finns

RKA 31- verorent

Gebhardt external rotor motor with impeller fitted directly.

RKA 32- verorent


Additionally equipped with sound absorbing lining for A-sound power level reduction of 6 dB at discharge. Compared to RKA 31 the flow rate is 5 % lower for the same pressure rise.

Accessories / Index

- When using back draught damper ZLK in connection with silencer upstand ZDS a spacer ZKK is required
- inclination in 5° steps up to 45° possible
- Pressure loss at back draught damper
- A protection for high speed is only active if Dahlander bridge is on place

Mått i mm, vi förbehåller oss rätten till ändringar.

RKA 31-/32-3540-..



Dimensions in mm, Subject to change.



G-350 [St]

Takgenomföring inkl. fällbar stosram

*EI30/EI60

Roof duct with Foldable frame

*EI30/EI60

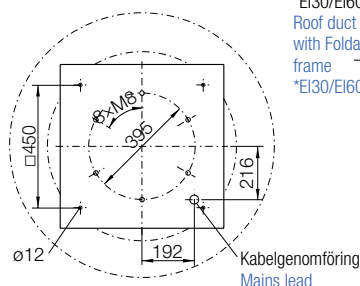


Tillbehör

ZBS 01-0056 [Al] 5 kg

ZBS 20-0056 [St] 10 kg

Stos för platta tak


Flat roof upstand



ZBS 23-0056 [St] 14 kg

Stos för platta tak, hög


Flat roof upstand tall



ZBS 09-0056-② [Al] 6 kg

Stos för snedtak


Inclined roof pstand



ZBS 11-0056 [GFK] 12 kg

Stos för korrugerat tak

Soaker sheet WDS



Accessories


ZDS 01-0056 [Al] 29 kg

ZDS 20-0056 [St] 40 kg

Stosljuddämpare

Upstand silencer

①




ZDS 09-0056-② [Al] 29 kg

Stosljuddämpare för snedtak

Inclined roof upstand silencer

①

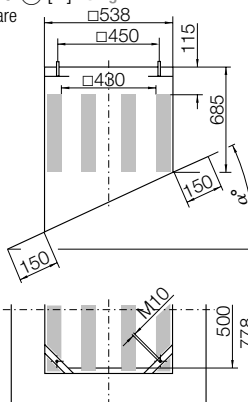


ZDR 30-0355 17 kg

Ljuddämpare inloppssida

Inlet silencer

①




ZKD 01-0355 3.5 kg

Inloppskona med fläns

Flanged inlet cone

①




ZKK 20-0056 [St] 14 kg

Mellanstycke

Spacer

①




ZBU 01-0056-35 [St] 6 kg

Anslutningsplatta

Connection plate

①




ZKE 11-0355 2.1 kg

Dukstos, inlopp

Inlet connection (flexible)

①




ZKF 11-0355 0.9 kg

Motfläns, inlopp

Mating flange

①




ZLK 01-0355 7 kg

Självstängande backspjäll

Automatic shutter

①




ZLK 21-0355 11 kg

Motormanövrerat spjäll

Motor drive shutter

①




ZSG 04-0355 0.6 kg

Inloppsgaller

Mesh inlet guard

①



Оформить
Заказ