


SAIR 140/59 - cod. S50249

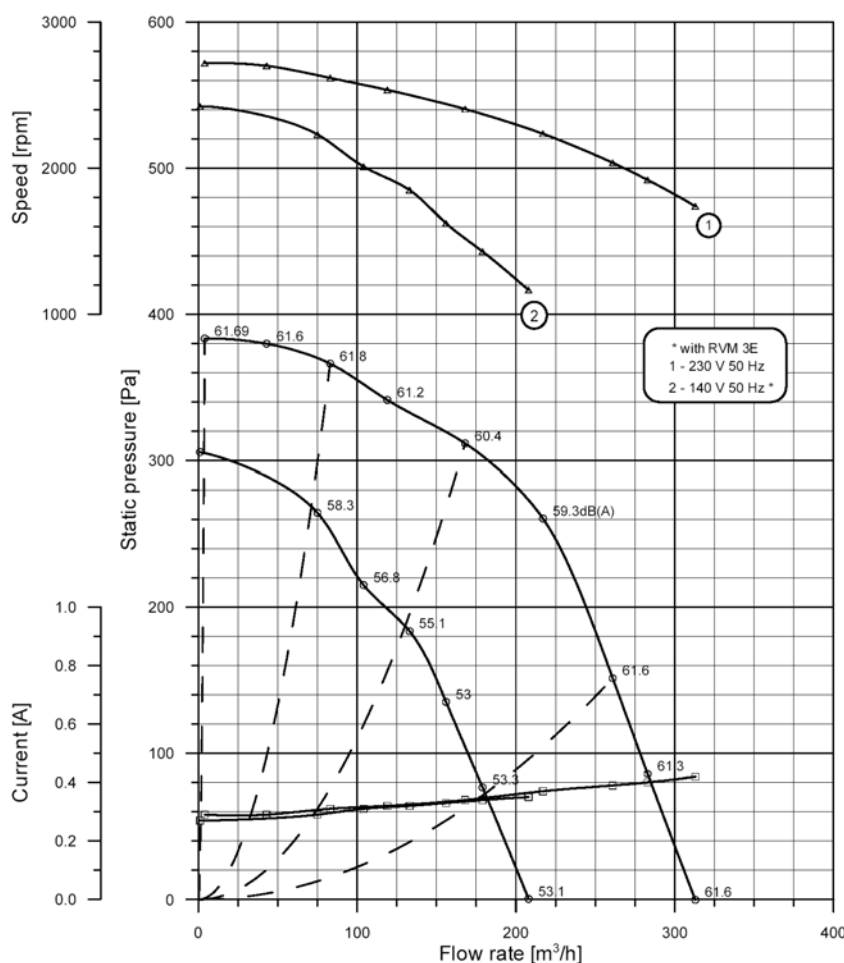

* The picture is only for display purposes of the range


Type: SAIR 140/59
Motor: S11C72
Test nr.: S2191.*
Date: 13/11/02

Watt: 110 Ass Amp Max: 0.42
Volt: 230 1~ Prot.: IP 44
Hz: 50 T.H.: YES-IN
Poles: 2 Ins. Cl.: B
μF: 2 / 450 V


Motor regulation: electronic

Air Density (γ): 1.20 kg/m³
Installation type : free inlet, free outlet
dB(A) free field noise measurements at 1 m

This test data obtained in a laboratory registered by AMCA, for AMCA 210/99 air performance testing.
Data is not certified by AMCA

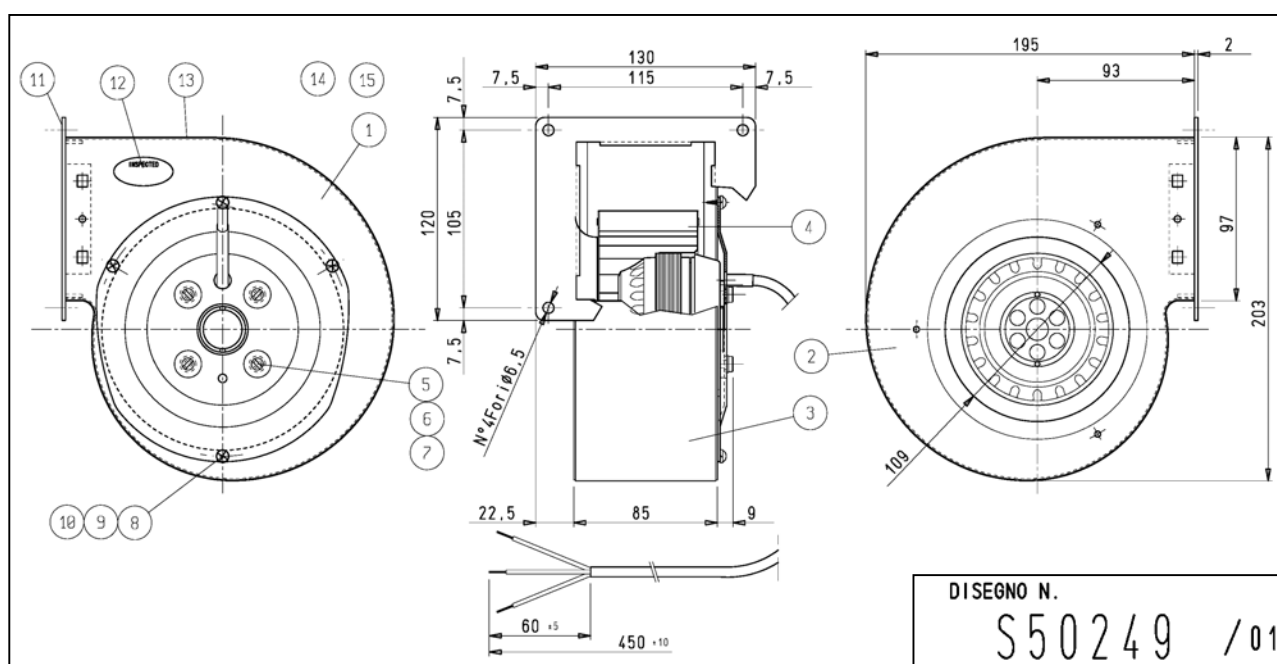

SAIR 140/59 - cod. S50250

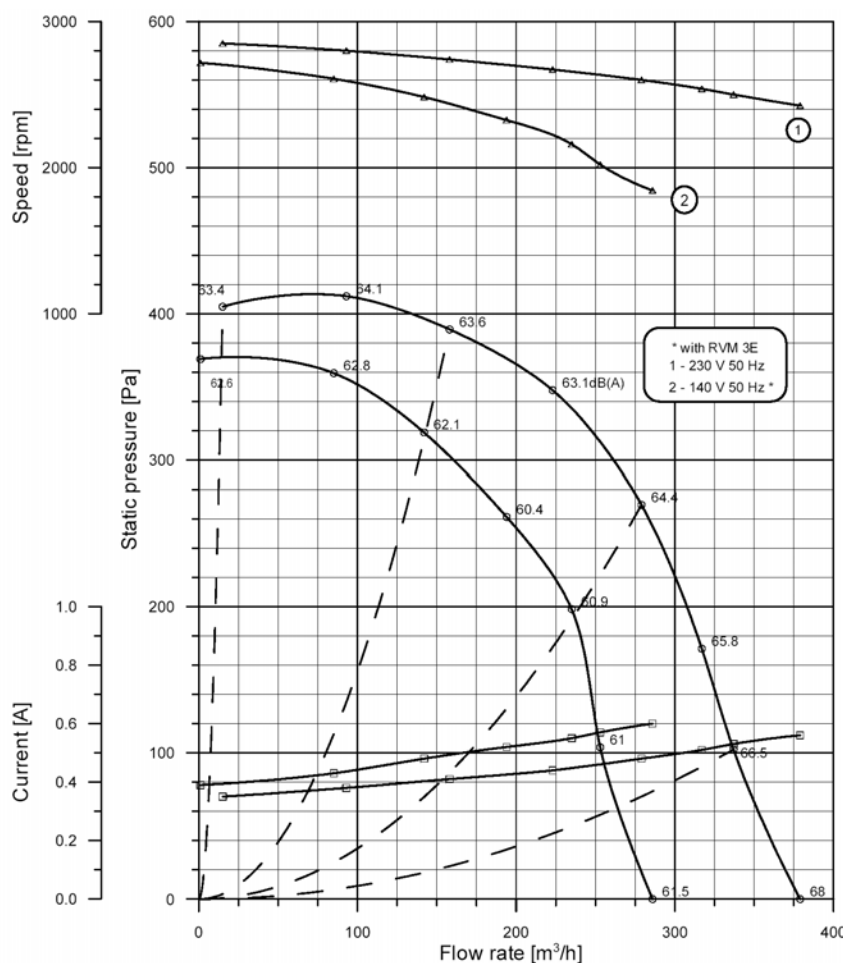

* The picture is only for display purposes of the range

Type: SAIR 140/59
Motor: S11C73
Test nr.: S2189.*
Date: 12/11/02

Watt: 160 Ass Amp Max: 0.56
Volt: 230 1~ Prot.: IP 44
Hz: 50 T.H.: YES-IN
Poles: 2 Ins. Cl.: B
μF: 4 / 450 V

Motor regulation: electronic

Air Density (γ): 1.20 kg/m³
Installation type : free inlet, free outlet
dB(A) free field noise measurements at 1 m

This test data obtained in a laboratory registered by AMCA, for AMCA 210/99 air performance testing.
Data is not certified by AMCA

