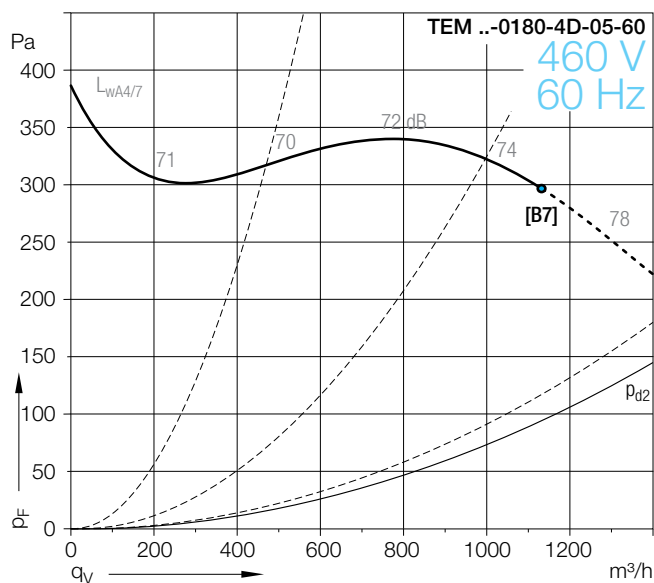
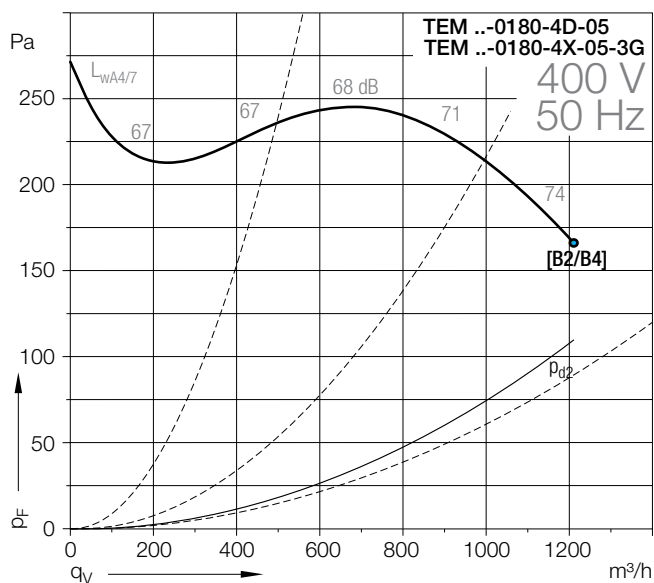
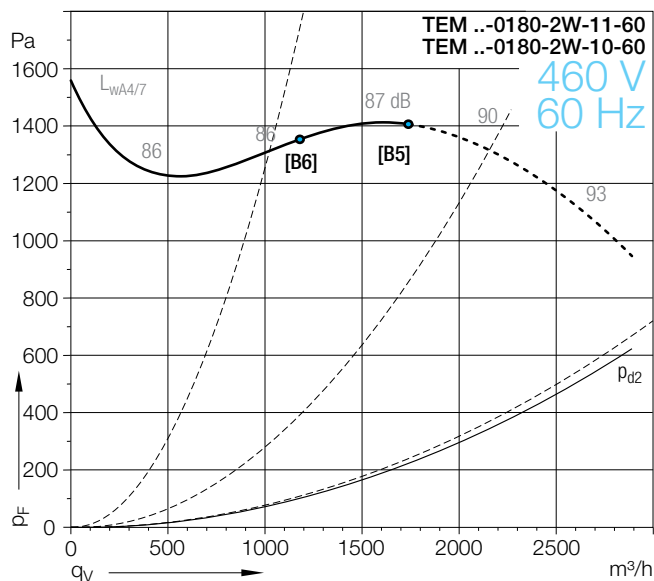
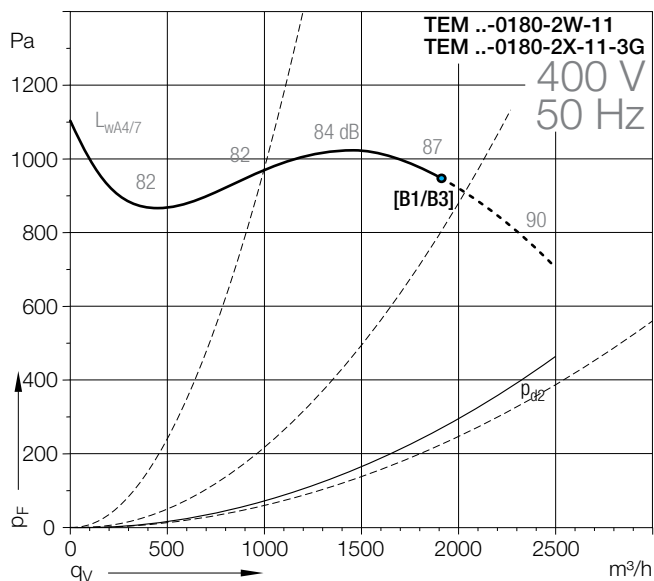



TEM 01-0180

TEM 08-0180

Curves

- Operation limit, see Technical Data
- do not use in this area!

Density of media **1.2 kg/m³**.Measured in installation **B** according to **ISO 5801** (ducted).

Оформить
Заказ

TEM 01-0180

TEM 08-0180

Technical Data

TEM ...	Curves	Nominal motor power kW	Poles	Motor size	Motor voltage V	Nominal frequency Hz	Connection	Nominal motor current A	Nominal motor speed 1/min	Max. media Temperature °C	Max. volume flow m³/h	Weight TEM 01/08 kg
0180-2W-11	[B1]	1.10	2	80 M	230/400	50	Δ/Y	4.20/2.40	2835	60	1950	13/17
0180-4D-05	[B2]	0.18	4	63	230/400	50	Δ/Y	0.97/0.56	1350	60	1250	8/12

Ex II 3G c IIB T3 TEM ...	Curves	Nominal motor power kW	Poles	Motor size	Motor voltage V	Nominal frequency Hz	Connection	Nominal motor current A	Nominal motor speed 1/min	Max. media Temperature °C	Max. volume flow m³/h	Weight TEM 01/08 kg
0180-2X-11-3G	[B3]	1.10	2	80	230/400	50	Δ/Y	4.30/2.50	2855	60	1950	13/17
0180-4X-05-3G	[B4]	0.18	4	63	230/400	50	Δ/Y	1.07/0.62	1330	60	1250	8/12

60 Hz TEM ...	Curves	Nominal motor power kW	Poles	Motor size	Motor voltage V	Nominal frequency Hz	Connection	Nominal motor current A	Nominal motor speed 1/min	Max. media Temperature °C	Max. volume flow m³/h	Weight TEM 01/08 kg
0180-2W-11-60	[B5]	1.27	2	80 M	460	60	Y	2.40	3402	60	1760	13/17
0180-2W-10-60	[B6]	0.86	2	80 M	460	60	Y	1.67	3366	60	1180	11/15
0180-4D-05-60	[B7]	0.21	4	63	460	60	Y	0.55	1650	60	1140	8/12

The given nominal motor current may not be exceeded. If the current consumption is exceeded, the volume is to be throttled correspondingly.

For fans of the ATEX execution, the guarantee for operation in explosion endangered areas or for the conveyance of explosive atmosphere expires when the motor nominal current is exceeded! For information on fans of the ATEX execution see Technical Description of this chapter.



Motor protection can take place through motor protection units with bi-metallic releases (EUM 33) or via a thermistor (NTC) temperature sensor in connection with a thermistor (NTC)-release device (EUM 03). See chapter "Accessories".

The direction of rotation is determined looking from the drive side. Anti-clockwise rotation, symbol **LG**. Clockwise rotation, symbol **RD**.



Dimensions in mm, subject to change.

TEM 01-0180

	k2
63	180
71	210
80	252
90 S	297
90 L	297
100 L	336
112 M	329
132 S	385
132 M	385

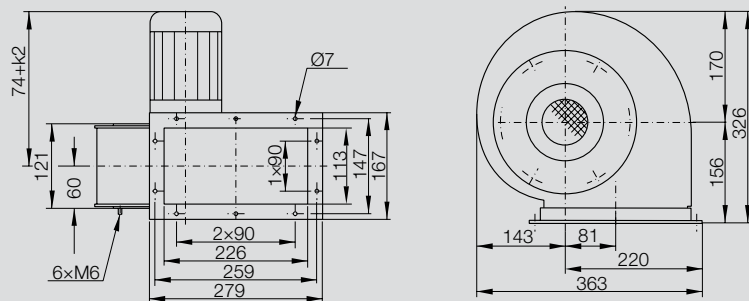

TEM 08-0180

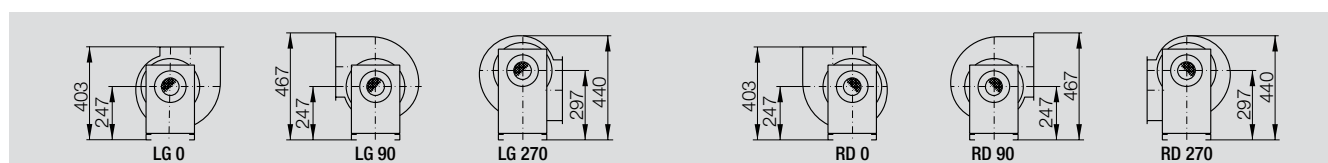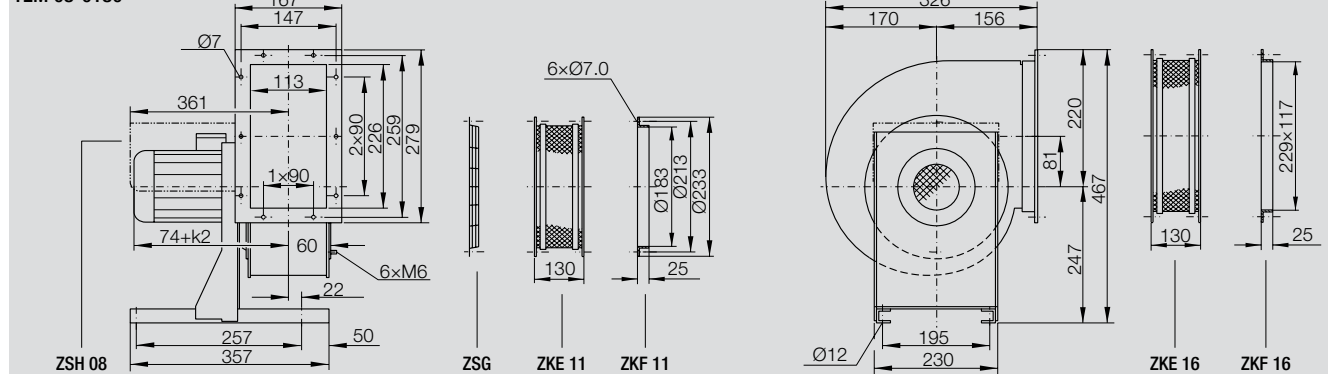

Оформить
Заказ

Ventilatorry.ru | zakaz@ventilatorry.ru | 8 (495) 133-95-09