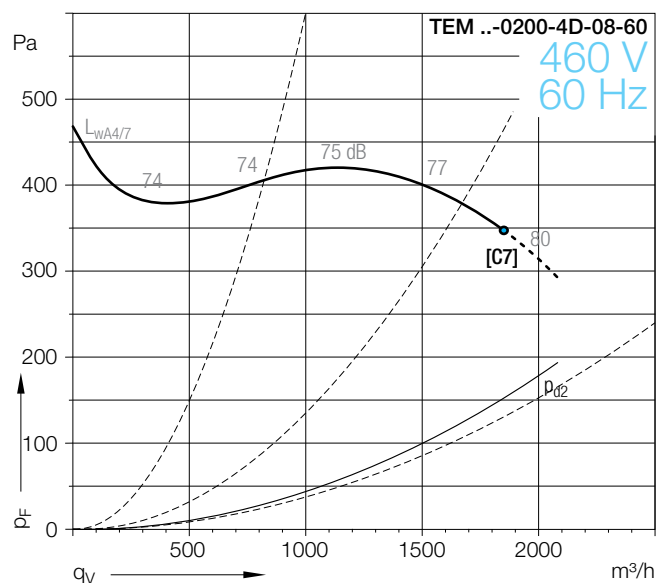
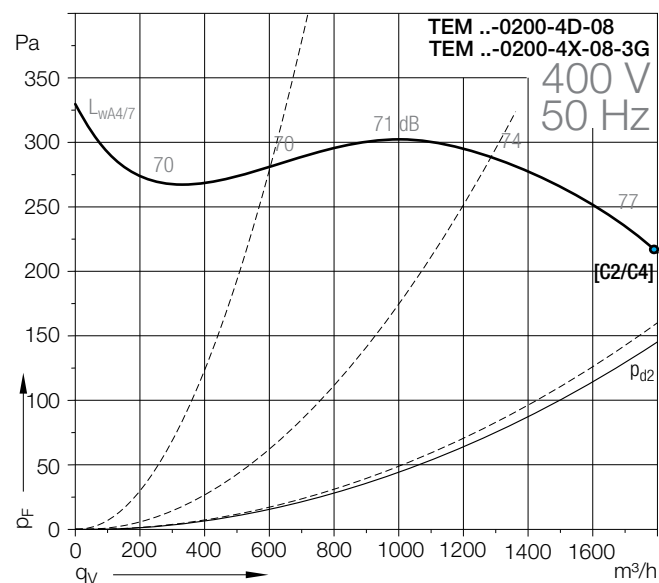
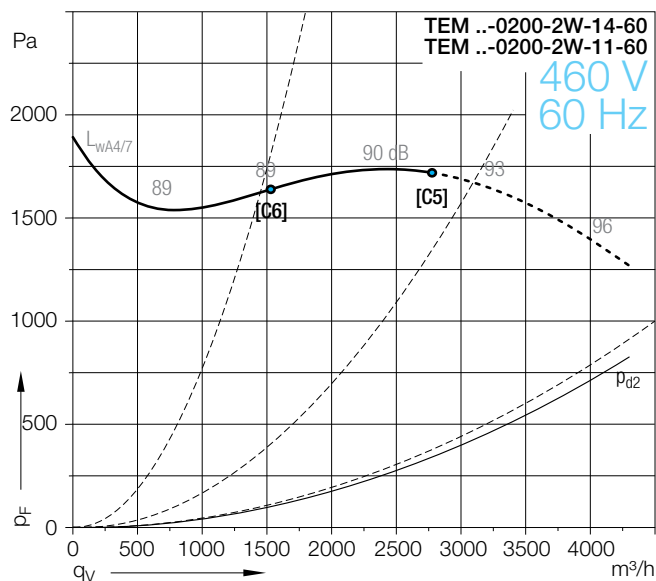
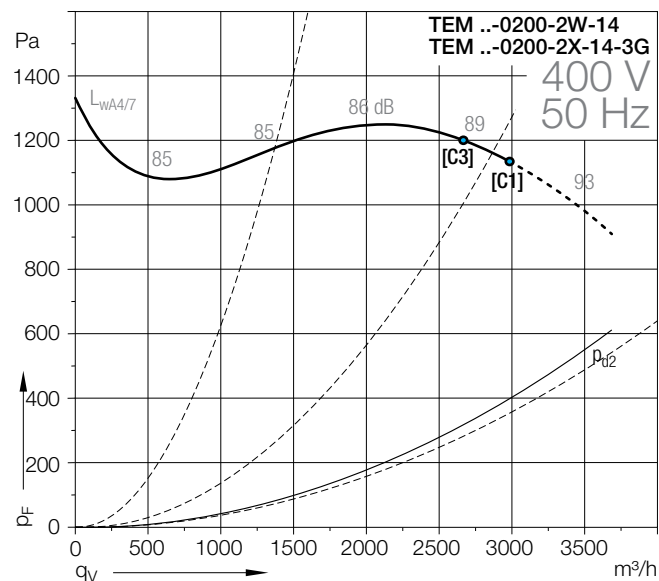



TEM 01-0200

TEM 08-0200

Curves

- Operation limit, see Technical Data
- do not use in this area!

Density of media **1.2 kg/m³**.Measured in installation **B** according to **ISO 5801** (ducted).

Оформить
Заказ

TEM 01-0200

TEM 08-0200

Technical Data

TEM ...	Curves	Nominal motor power kW	Poles	Motor size	Motor voltage V	Nominal frequency Hz	Connection	Nominal motor current A	Nominal motor speed 1/min	Max. media Temperature °C	Max. volume flow m³/h	Weight TEM 01/08 kg
0200-2W-14	[C1]	2.20	2	90 L	230/400	50	Δ/Y	7.80/4.50	2890	60	2800	20/24
0200-4D-08	[C2]	0.37	4	71	230/400	50	Δ/Y	1.78/1.03	1370	60	1970	10/14

Ex II 3G c IIB T3 TEM ...	Curves	Nominal motor power kW	Poles	Motor size	Motor voltage V	Nominal frequency Hz	Connection	Nominal motor current A	Nominal motor speed 1/min	Max. media Temperature °C	Max. volume flow m³/h	Weight TEM 01/08 kg
0200-2X-14-3G	[C3]	1.85	2	90 L	230/400	50	Δ/Y	6.85/3.95	2865	60	2730	20/24
0200-4X-08-3G	[C4]	0.37	4	71	230/400	50	Δ/Y	1.91/1.10	1355	60	1970	10/14

60 Hz TEM ...	Curves	Nominal motor power kW	Poles	Motor size	Motor voltage V	Nominal frequency Hz	Connection	Nominal motor current A	Nominal motor speed 1/min	Max. media Temperature °C	Max. volume flow m³/h	Weight TEM 01/08 kg
0200-2W-14-60	[C5]	2.55	2	90 L	460	60	Y	4.50	3468	60	2820	20/24
0200-2W-11-60	[C6]	1.27	2	80 M	460	60	Y	2.40	3402	60	1510	14/18
0200-4D-08-60	[C7]	0.43	4	71	460	60	Y	1.02	1670	60	1870	10/14

The given nominal motor current may not be exceeded. If the current consumption is exceeded, the volume is to be throttled correspondingly.

For fans of the ATEX execution, the guarantee for operation in explosion endangered areas or for the conveyance of explosive atmosphere expires when the motor nominal current is exceeded! For information on fans of the ATEX execution see Technical Description of this chapter.




Motor protection can take place through motor protection units with bi-metallic releases (EUM 33) or via a thermistor (NTC) temperature sensor in connection with a thermistor (NTC)-release device (EUM 03). See chapter "Accessories".

The direction of rotation is determined looking from the drive side. Anti-clockwise rotation, symbol **LG**. Clockwise rotation, symbol **RD**.











Dimensions in mm, subject to change.

TEM 01-0200

	k2
63	180
71	210
80	252
90 S	297
90 L	297
100 L	336
112 M	329
132 S	385
132 M	385

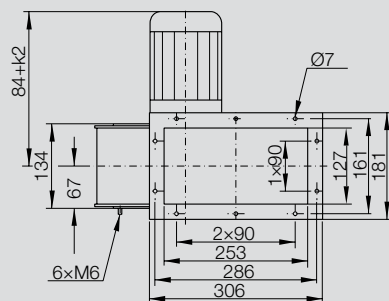

TEM 08-0200

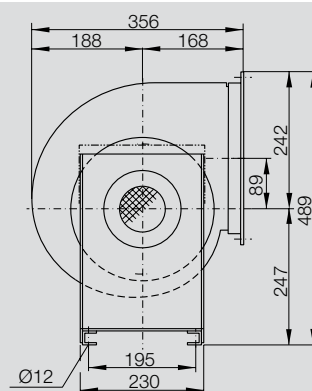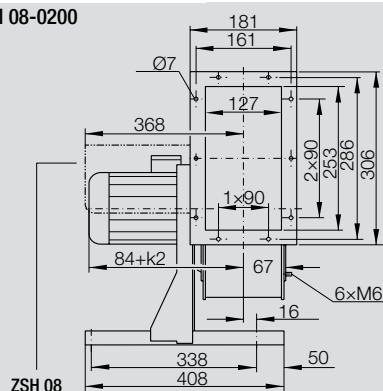

Оформить
Заказ

Ventilatorry.ru | zakaz@ventilatorry.ru | 8 (495) 133-95-09