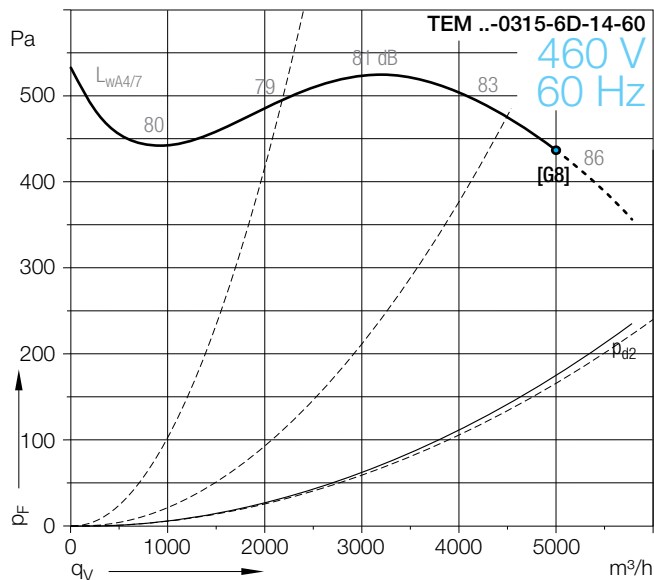
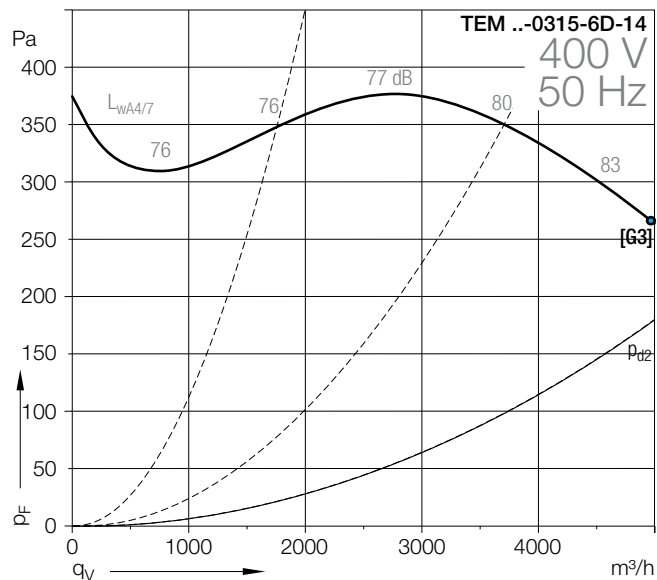
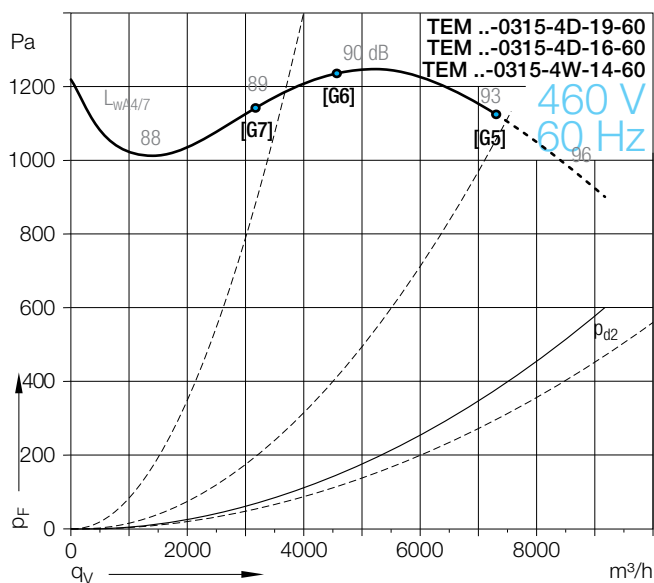
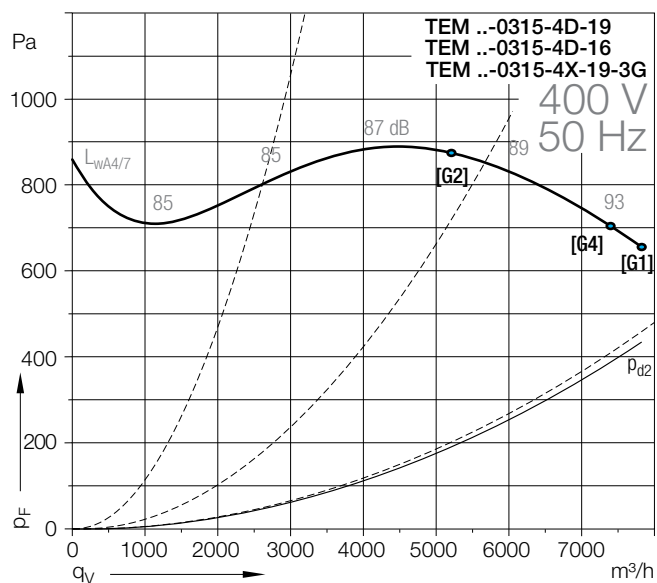



TEM 01-0315

TEM 08-0315

Curves

- Operation limit, see Technical Data
- do not use in this area!

Density of media **1.2 kg/m³**.Measured in installation **B** according to **ISO 5801** (ducted).

Оформить
Заказ

TEM 01-0315

TEM 08-0315

Technical Data

Technical Data											Max. volume flow	Weight
TEM ..-	Curves	Nominal motor power kW	Poles	Motor size	Motor voltage V	Nominal frequency Hz	Connection	Nominal motor current A	Nominal motor speed 1/min	Max. media Temperature °C	m³/h	TEM 01/08 kg
0315-4W-19	[G1]	4.00	4	112 M	400 D	50	△	8.20	1460	60	7830	47/54
0315-4W-16	[G2]	2.20	4	100 L	230/400	50	△/Y	8.05/4.65	1455	60	5200	29/40
0315-6W-14	[G3]	1.10	6	90 L	230/400	50	△/Y	5.00/2.90	940	60	4980	26/37

Ex II 3G c IIB T3 TEM ...	Curves	Nominal motor power kW	Poles	Motor size	Motor voltage V	Nominal frequency Hz	Connection	Nominal motor current A	Nominal motor speed 1/min	Max. media Temperature °C	Max. volume flow m³/h	Weight TEM 01/08 kg
0315-4X-19-3G	[G4]	3.60	4	112 M	230/400	50	△/Y	13.00/7.50	1435	60	7400	49/60

60 Hz TEM ...-	Curves	Nominal	Poles	Motor size	Motor	Nominal	Connection	Nominal	Nominal	Max. media	Max.	Weight			
		motor power			voltage			frequency			motor current		motor speed	Temperature	volume
		kW			V			Hz			A		1/min	°C	flow
0315-4W-19-60	[G5]	4.55	4	112 M	460	60	△	8.00	1760	60	7400	47/54			
0315-4W-16-60	[G6]	2.55	4	100 L	460	60	Y	4.50	1755	60	4550	40/47			
0315-4W-14-60	[G7]	1.75	4	90 L	460	60	Y	3.30	1722	60	3130	33/40			
0315-6W-14-60	[G8]	1.30	6	90 L	460	60	Y	3.05	1140	60	5000	26/37			

The given nominal motor current may not be exceeded. If the current consumption is exceeded, the volume is to be throttled correspondingly.

For fans of the ATEX execution, the guarantee for operation in explosion endangered areas or for the conveyance of explosive atmosphere expires when the motor nominal current is exceeded! For information on fans of the ATEX execution see Technical Description of this chapter.




Motor protection can take place through motor protection units with bi-metallic releases (EUM 33) or via a thermistor (NTC) temperature sensor in connection with a thermistor (NTC)-release device (EUM 03). See chapter "Accessories".

The direction of rotation is determined looking from the drive side. Anti-clockwise rotation, symbol **LG**. Clockwise rotation, symbol **RD**.











Dimensions in mm, subject to change.

TEM 01-0315

	k2
63	180
71	210
80	252
90 S	297
90 L	297
100 L	336
112 M	329
132 S	385
132 M	385

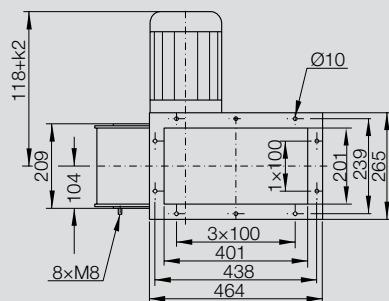

TEM 08-0315

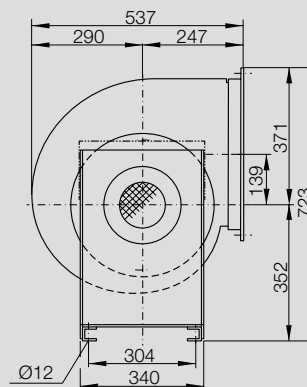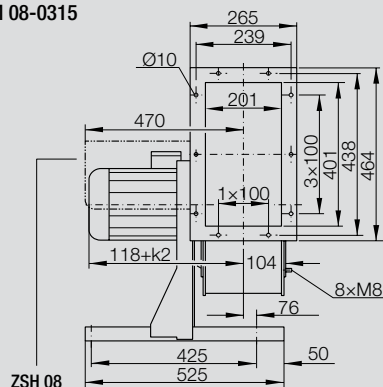

Оформить
Заказ

Ventilatorry.ru | zakaz@ventilatorry.ru | 8 (495) 133-95-09