




- in allen Einbaulagen montierbar
• rückwärtsgekr. Hochleistungslaufrad
• 100% stufenlos regelbar
• kompakte, raumsparende Bauart
• mountable in all installation positions
• backward curved high efficiency impeller
• speed is 100% infinitely variable
• compact, space saving design

Technische Daten / Technical data:

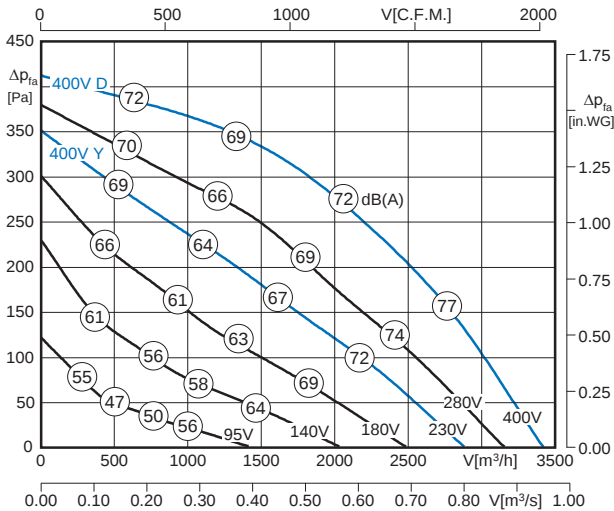

Geräusche / Sound levels:


Equations for sound level calculations: Lw(A)5 = Lw(A)8 - 6 dB, Lw(A)6 = Lw(A)8 - 3 dB, etc.

Table with sound level data (LWArel A-weighted) for different frequencies (125, 250, 500, 1K, 2K, 4K, 8K Hz) and fan models.

Düsenbeiwert / Calibration factor : k10 = 100

Table with technical specifications: Ventilatorotyp / Fan Type, U [V], f [Hz], P [kW], In [A], n [min-1], tr [°F], tr [°C], Delta I [%], Ia/In, IP54, 01.006, 6.2, 15.

Schaltbild / Wiring diagram:

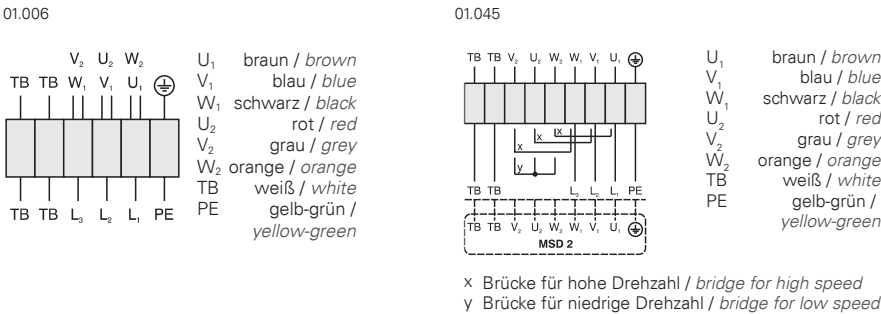

Maße / Dimensions : [mm]

