




- in allen Einbaulagen montierbar
- rückwärtsgekr. Hochleistungslaufrad
- 100% stufenlos regelbar
- kompakte, raumsparende Bauart
- mountable in all installation positions
- backward curved high efficiency impeller
- speed is 100% infinitely variable
- compact, space saving design

Technische Daten / Technical data:

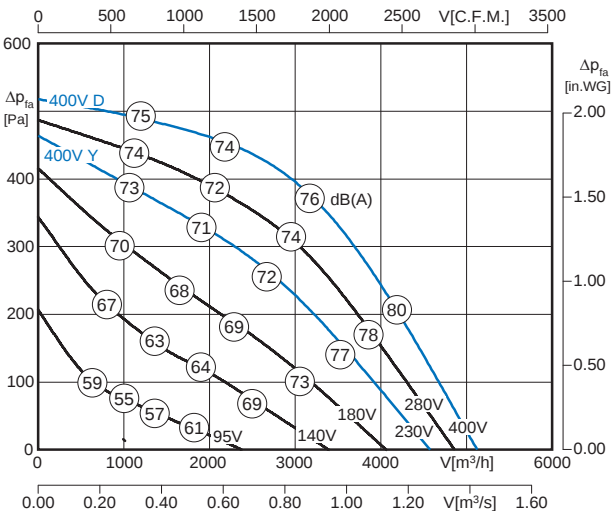

Geräusche / Sound levels:


Equations for sound level calculations: Lw(A)5 = Lw(A)8 - 6 dB, Lw(A)6 = Lw(A)8 - 3 dB, and formulas for Lw(A)5okt, Lw(A)6okt, and Lw(A)8okt.

Table with sound power level data (LWA5, LWA6, LWA8) in dB(A) for different frequencies (125, 250, 500, 1K, 2K, 4K, 8K Hz) for inlet and outlet sides.

Düsenbeiwert / Calibration factor : k10 = 130

Table with technical specifications: Ventilator typ, U [V], f [Hz], P [kW], In [A], n [min⁻¹], tr [°F], tr [°C], ΔI [%], Ia/In, IP54, star symbol, weight [kg] for DKHR and DKHM.

Schaltbild / Wiring diagram:

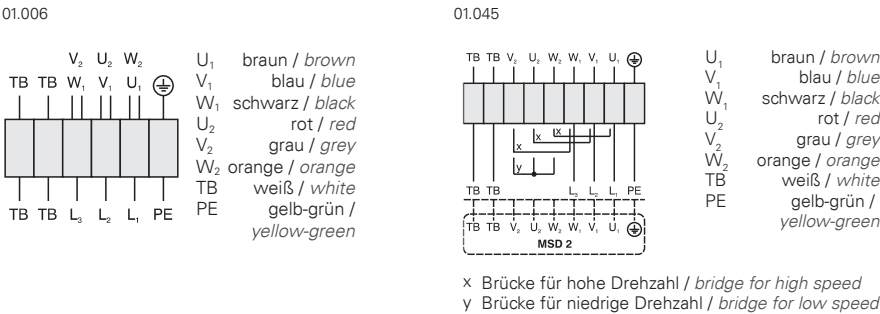

Maße / Dimensions : [mm]

