




- in allen Einbaulagen montierbar
• rückwärtsgekr. Hochleistungslaufrad
• 100% stufenlos regelbar
• kompakte, raumsparende Bauart
• mountable in all installation positions
• backward curved high efficiency impeller
• speed is 100% infinitely variable
• compact, space saving design

Technische Daten / Technical data:

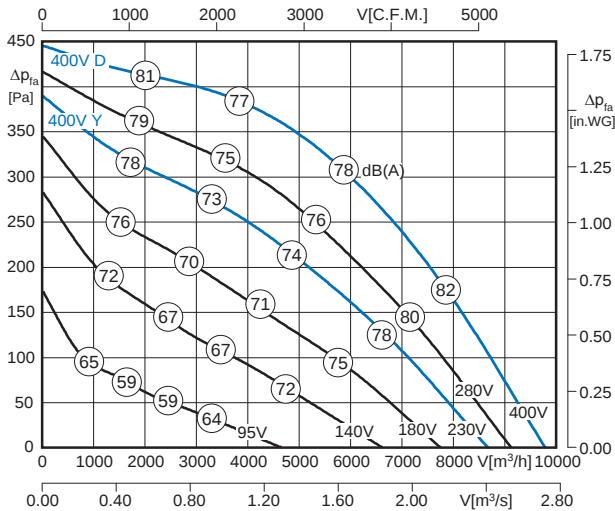

Geräusche / Sound levels:


Equations for sound level calculation: Lw(A)5 = Lw(A)8 - 6 dB, Lw(A)6 = Lw(A)8 - 3 dB, and octave band formulas.

Table with sound power levels (LWA5, LWA6, LWA8) in dB(A) for different frequencies (125, 250, 500, 1K, 2K, 4K, 8K Hz) and fan types.

Düsenbeiwert / Calibration factor : k10 = 261

Table with technical specifications: Ventilator typ, Voltage (U), Frequency (f), Power (P), Current (IN), Speed (n), Temperatures (tr, tr), Efficiency (eta), and weights.

Schaltbild / Wiring diagram:

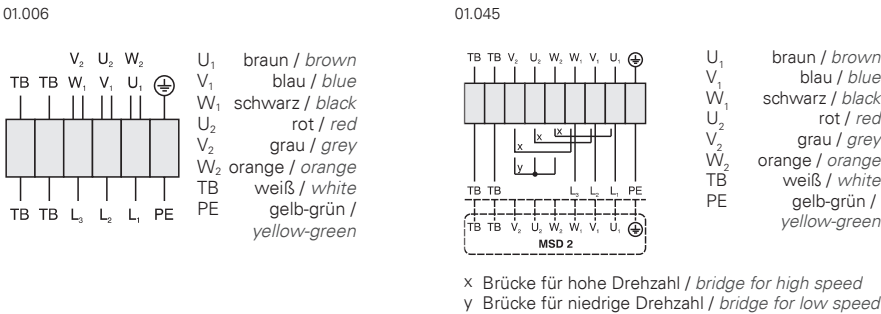

Maße / Dimensions : [mm]

