




- in allen Einbaulagen montierbar
- rückwärtsgekr. Hochleistungslaufrad
- 100% stufenlos regelbar
- kompakte, raumsparende Bauart
- mountable in all installation positions
- backward curved high efficiency impeller
- speed is 100% infinitely variable
- compact, space saving design

Technische Daten / Technical data:

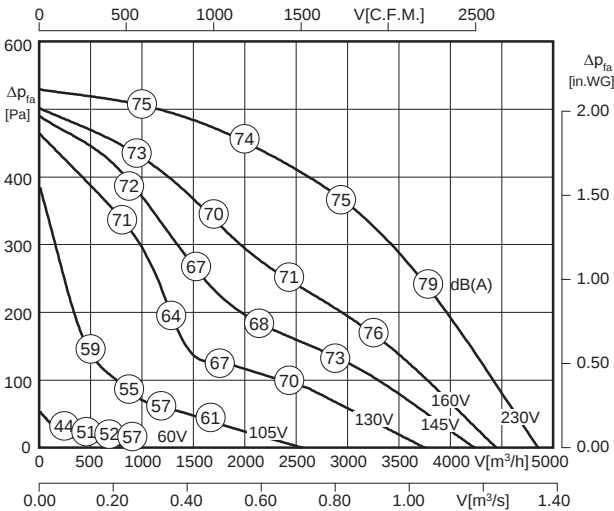

Geräusche / Sound levels:

LWA5 = LWA8 - 6 dB
LWA6 = LWA8 - 3 dB
LWA8 is in the air performance curve displayed

LWA5okt = LWA5 + LWA5rel
LWA6okt = LWA6 + LWA6rel
LWA8okt = LWA8 + LWA8rel


Table with sound power levels (LWA5, LWA6, LWA8) in dB(A) for different frequencies (125, 250, 500, 1K, 2K, 4K, 8K Hz) at inlet and outlet sides.

Düsenbeiwert / Calibration factor : k10 = 136

Technical specification table with columns: Ventilartyp / Fan Type, U [V], f [Hz], P [kW], IN [A], n [min-1], C [µF], tr [°F], tr [°C], ΔI [%], Ia/In, IP54, star symbol, weight EKHR [kg], weight EKHM [kg].

60Hz-Daten siehe Seite 122 / 60Hz data please see page 122

Schaltbild / Wiring diagram:

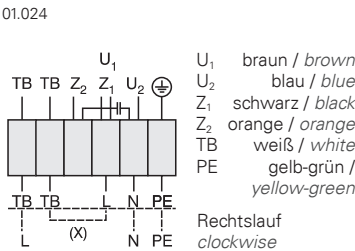

Maße / Dimensions : [mm]

