





产品特点



电机技术: AC 外转子
电机工作制: S1 连续工作制
电机防护等级: IP54
电机绝缘等级: F
轴承: 免维护深沟球轴承
风轮材料: 铝板
风轮旋向: 逆时针, 从引出线端看过去

Product Characteristic

Motor technology: AC Outer rotor
Mode of Operation: S1
Protection Class: IP54
Insulation Class: F
Bearings: Maintenance-free ball bearings
Impeller Material: Sheet aluminium
Rotation: C.C.W, seen on the leads

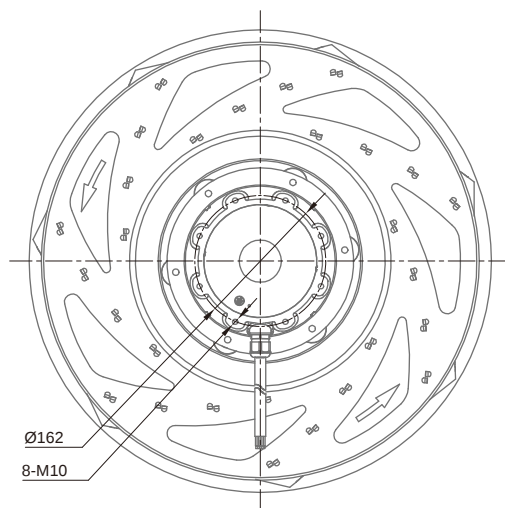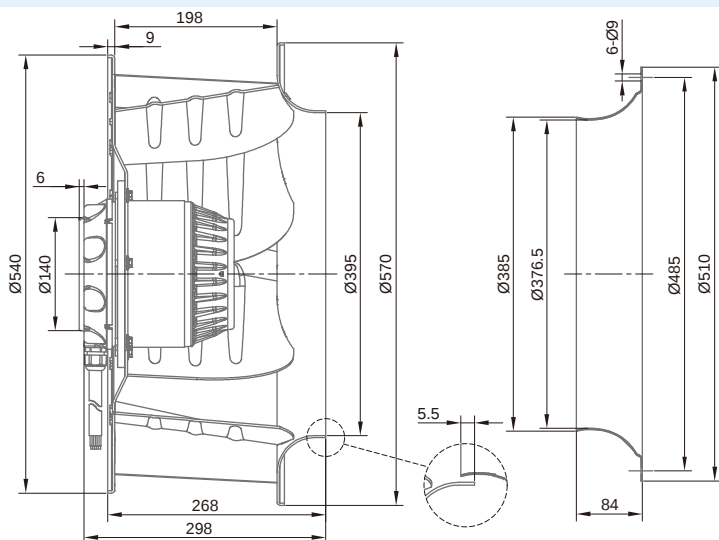

Flow Rate Curve

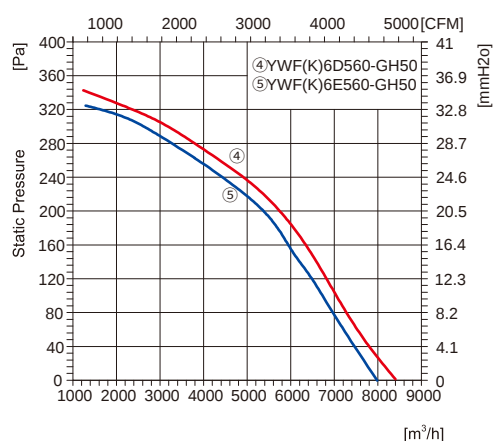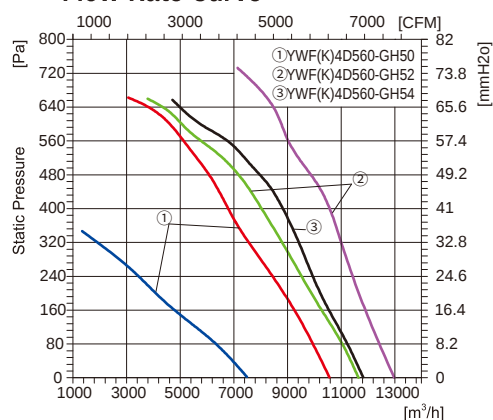

轴流风机
Axial fans

前倾离心风机
Forward Curved Centrifugal fans

单进风蜗壳式风机
Single Inlet Forward Curved Centrifugal Blower

双进风蜗壳式风机
Dual Inlet Forward Curved Centrifugal Blower

后倾离心风机
Backward Curved Centrifugal fans
AC



无蜗壳风机
Centrifugal plug fans
EC

圆形管道风机
Circular duct fans

型号 Model	电压 Voltage (V)	频率 Frequency (Hz)	输入功率 Input Power (W)	电流 Current (A)	风量 Air Volume (m³/h)	转速 Speed (r/min)	电容 Capacitor (μF)	噪音 Noise [dB(A)]	允许最高环境温度 Max Environmental Temperature (°C)	重量 Weight (Kg)
YWF(K)4D560-GH50	400 △/Y	50	1800/850	3.4/1.68	11000/7770	1290/900	-	79	45	24.0
YWF(K)4D560-GH52	400 △/Y	50	2700/2070	4.78/3.3	13000/11700	1400/1270	-	81	50	28.0
YWF(K)4D560-GH54	400 △	50	2300	3.7	12000	1325	-	81	50	25.0
YWF(K)6D560-GH50	230/400 △/Y	50	780	2.69/1.55	8400	870	-	69	50	20.0
YWF(K)6E560-GH50	230	50	700	3.1	8400	900	19	69	50	20.0



Flow Rate Curve

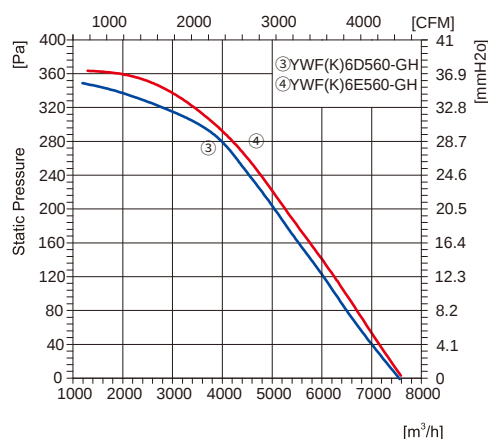
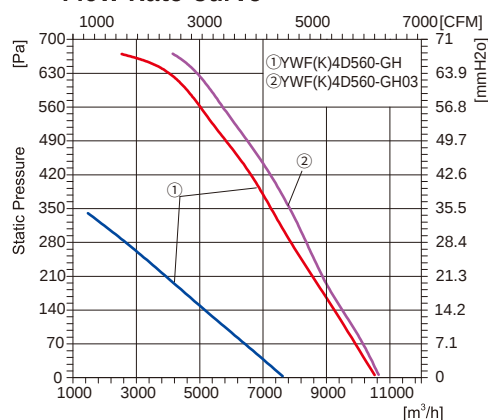


产品特点

电机技术: AC 外转子
电机工作制: S1 连续工作制
电机防护等级: IP54
电机绝缘等级: F
轴承: 免维护深沟球轴承
风轮材料: 铝板
风轮旋向: 逆时针, 从引出线端看过去

Product Characteristic

Motor technology: AC Outer rotor
Mode of Operation: S1
Protection Class: IP54
Insulation Class: F
Bearings: Maintenance-free ball bearings
Impeller Material: Sheet aluminium
Rotation: C.C.W, seen on the leads

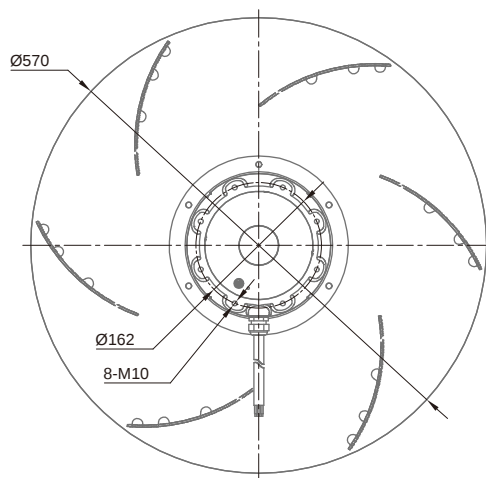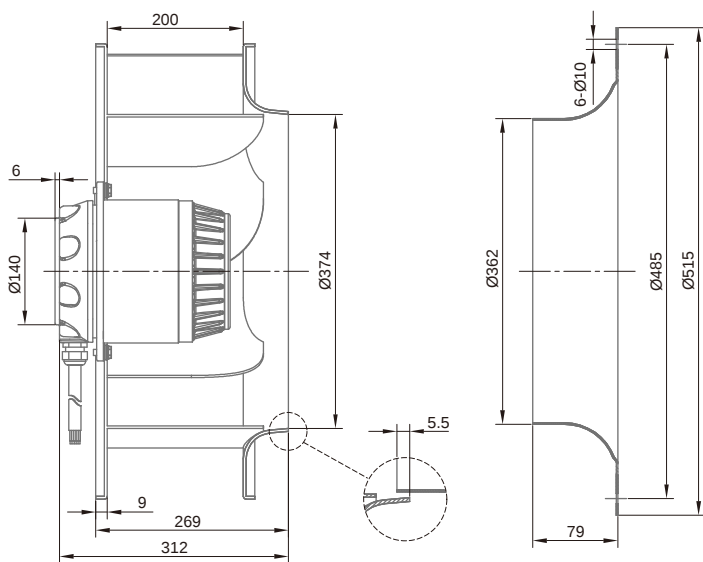

型号 Model	电压 Voltage (V)	频率 Frequency (Hz)	输入功率 Input Power (W)	电流 Current (A)	风量 Air Volume (m³/h)	转速 Speed (r/min)	电容 Capacitor (μF)	噪音 Noise [dB(A)]	允许最高环境温度 Max Environmental Temperature (°C)	重量 Weight (Kg)
YWF(K)4D560-GH	400 △/Y	50	1850/850	3.6/1.75	10310	1200/780	-	79	40	23.0
YWF(K)4D560-GH03	230/400 △/Y	50	2200	6.5/3.7	10350	1250	-	79	45	23.0
YWF(K)6D560-GH	230/400 △/Y	50	780	2.69/1.55	7500	870	-	69	50	19.0
YWF(K)6E560-GH	230	50	700	3.1	7600	900	19	69	50	19.0