


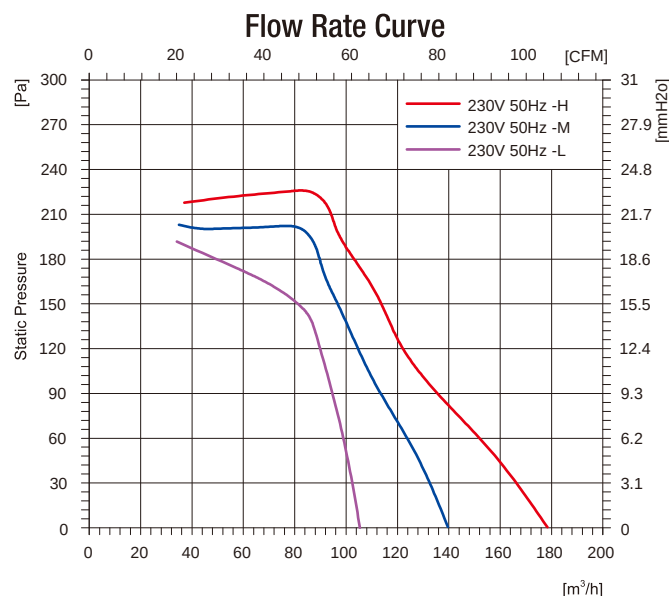


### 产品特点


电机技术: AC 外转子  
电机工作制: S1 连续工作制  
电机防护等级: IP54  
电机绝缘等级: F  
轴承: 免维护深沟球轴承  
风轮材料: 镀锌钢板  
外壳材料: 镀锌钢板  
风轮旋向: 逆时针, 从引出线端看过去  
转速三档可调

### Product Characteristic

Motor technology: AC Outer rotor  
Mode of Operation: S1  
Protection Class: IP54  
Insulation Class: F  
Bearings: Maintenance-free ball bearings  
Impeller Material: Galvanised sheet steel  
Housing Material: Galvanised sheet steel  
Rotation: C.C.W, seen on the leads  
Three stage speed adjust available

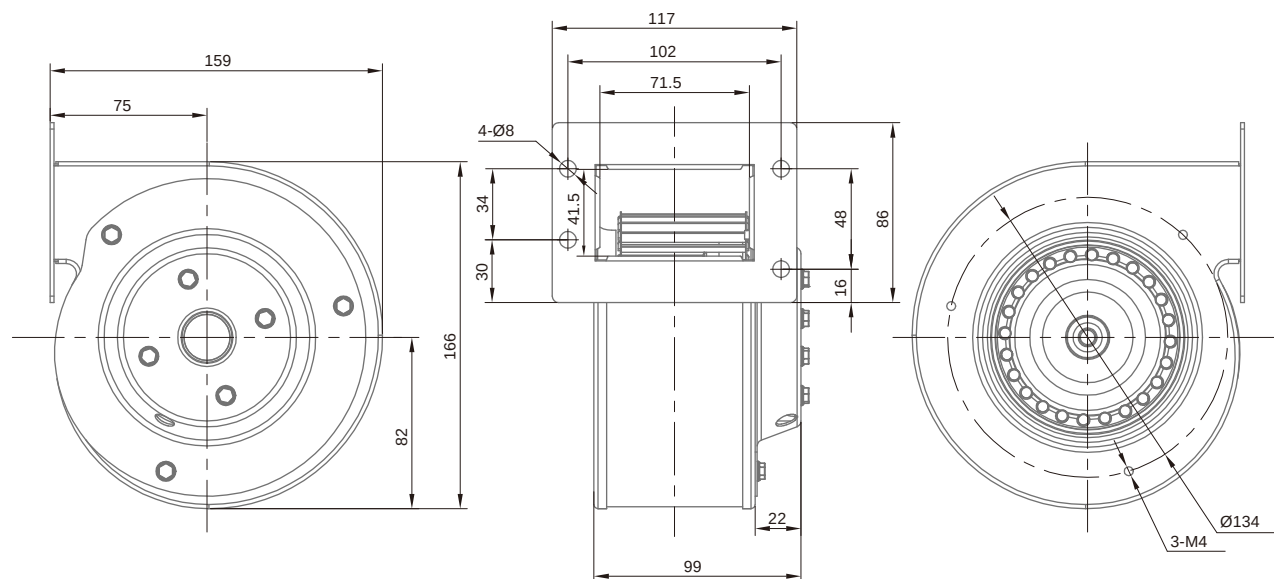

| 型号<br>Model          | 电压<br>Voltage (V) | 频率<br>Frequency (Hz) | 输入功率<br>Input Power (W) | 电流<br>Current (A) | 风量<br>Air Volume (m³/h) | 转速<br>Speed (r/min) | 电容<br>Capacitor (μF) | 噪音<br>Noise [dB(A)] | 允许最高环境温度<br>Max Environmental Temperature (°C) | 重量<br>Weight (Kg) |
|----------------------|-------------------|----------------------|-------------------------|-------------------|-------------------------|---------------------|----------------------|---------------------|------------------------------------------------|-------------------|
| YWF(K)2E120-GQ02-LDR | 230               | 50                   | 62/45/42                | 0.28/0.24/0.22    | 180                     | 2500/2010/1510      | 2                    | 62                  | 60                                             | 2.0               |

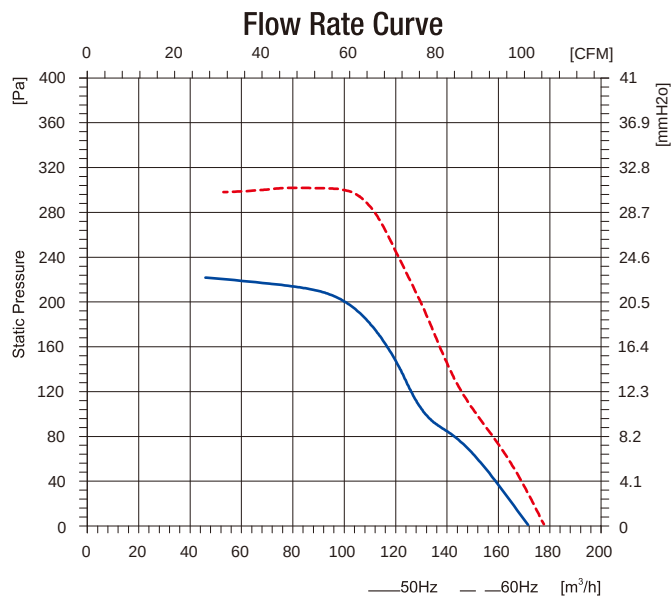


## 产品特征

|         |               |
|---------|---------------|
| 电机技术:   | AC 外转子        |
| 电机工作制:  | S1 连续工作制      |
| 电机防护等级: | IP54          |
| 电机绝缘等级: | F             |
| 轴承:     | 免维护深沟球轴承      |
| 风轮材料:   | 镀锌钢板          |
| 外壳材料:   | 镀锌钢板          |
| 风轮旋向:   | 逆时针, 从引出线端看过去 |

### Product Characteristic

|                    |                                |
|--------------------|--------------------------------|
| Motor technology:  | AC Outer rotor                 |
| Mode of Operation: | S1                             |
| Protection Class:  | IP54                           |
| Insulation Class:  | F                              |
| Bearings:          | Maintenance-free ball bearings |
| Impeller Material: | Galvanised sheet steel         |
| Housing Material:  | Galvanised sheet steel         |
| Rotation:          | C.C.W, seen on the leads       |

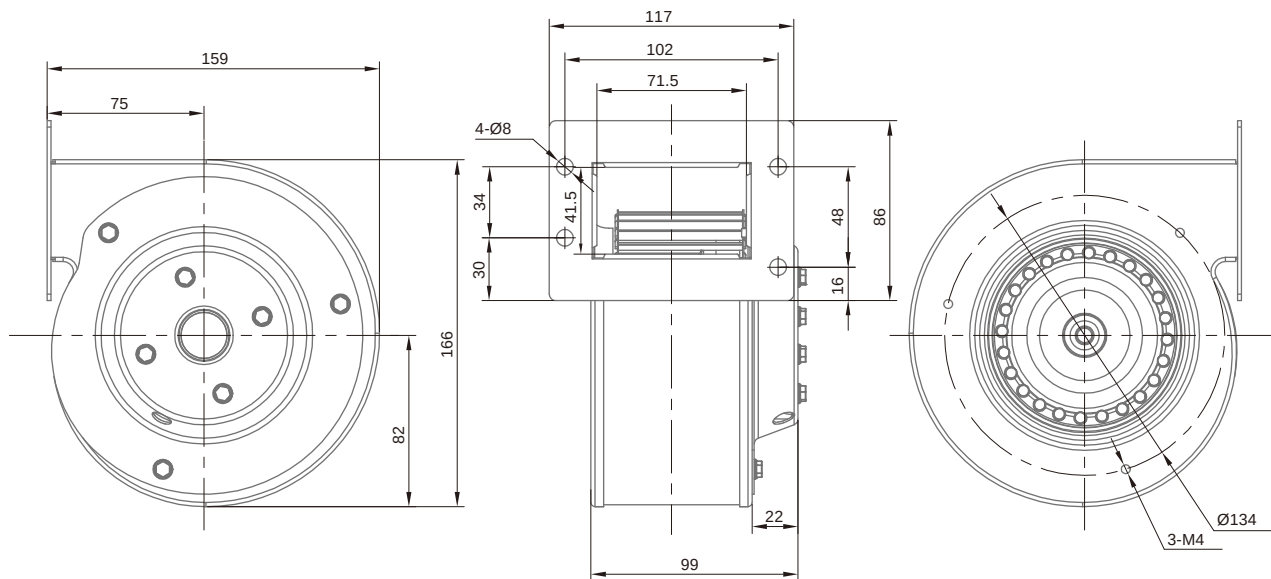

| 型 号<br>Model     | 电 压<br>Voltage<br>(V) | 频 率<br>Frequency<br>(Hz) | 输入功率<br>Input Power<br>(W) | 电 流<br>Current<br>(A) | 风 量<br>Air Volume<br>(m³/h) | 转 速<br>Speed<br>(r/min) | 电 容<br>Capacitor<br>(μF) | 噪 音<br>Noise<br>[dB(A)] | 允许最高<br>环境温度<br>Max Environmental<br>Temperature<br>(°C) | 重 量<br>Weight<br>(Kg) |
|------------------|-----------------------|--------------------------|----------------------------|-----------------------|-----------------------------|-------------------------|--------------------------|-------------------------|----------------------------------------------------------|-----------------------|
| YWF(K)2E120-GQ-R | 230                   | 50/60                    | 62/82                      | 0.28/0.37             | 165                         | 2500/2630               | 2                        | 62                      | 60/50                                                    | 2.0                   |