


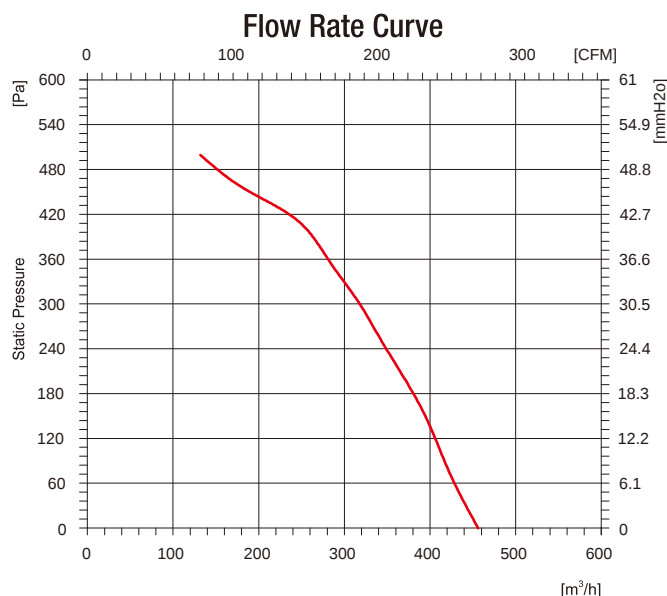


产品特点


电机技术: AC 外转子
电机工作制: S1 连续工作制
电机防护等级: IP54
电机绝缘等级: F
轴承: 免维护深沟球轴承
风轮材料: 镀锌钢板
外壳材料: 镀锌钢板
风轮旋向: 逆时针, 从引出线端看过去

Product Characteristic

Motor technology: AC Outer rotor
Mode of Operation: S1
Protection Class: IP54
Insulation Class: F
Bearings: Maintenance-free ball bearings
Impeller Material: Galvanised sheet steel
Housing Material: Galvanised sheet steel
Rotation: C.C.W, seen on the leads

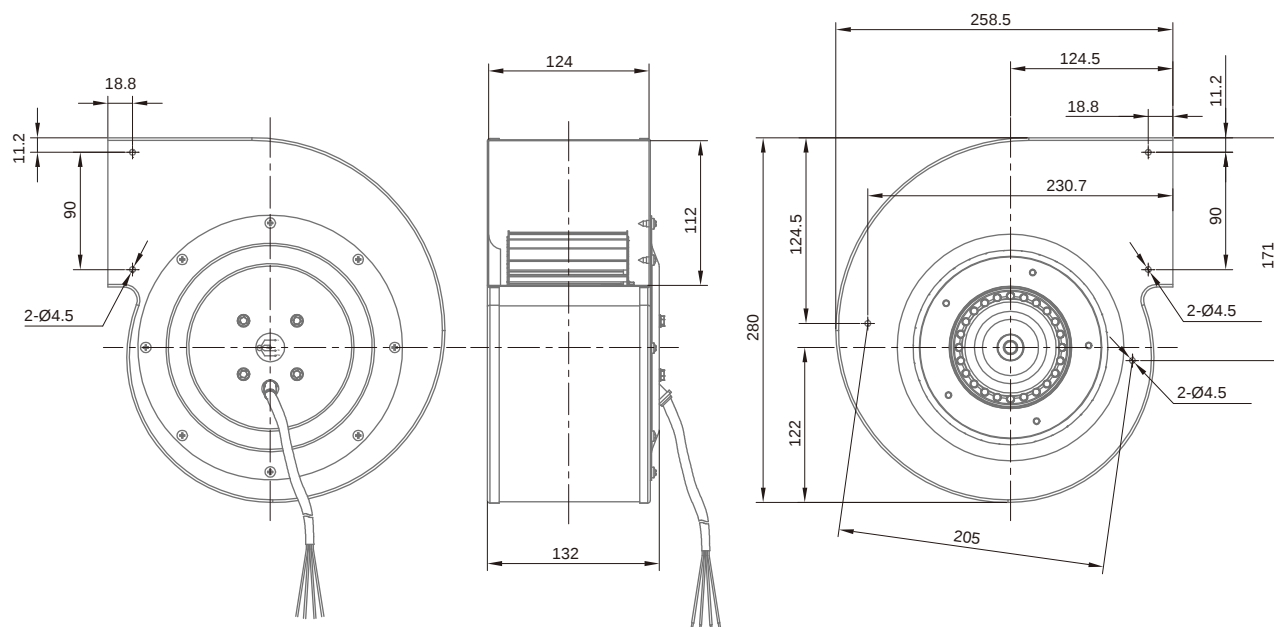

型号 Model	电压 Voltage (V)	频率 Frequency (Hz)	输入功率 Input Power (W)	电流 Current (A)	风量 Air Volume (m³/h)	转速 Speed (r/min)	电容 Capacitor (μF)	噪音 Noise [dB(A)]	允许最高环境温度 Max Environmental Temperature (°C)	重量 Weight (Kg)
YWF(K)2E180-GQ02-R	220	50	188	0.83	455	1900	4	62	60	4.6

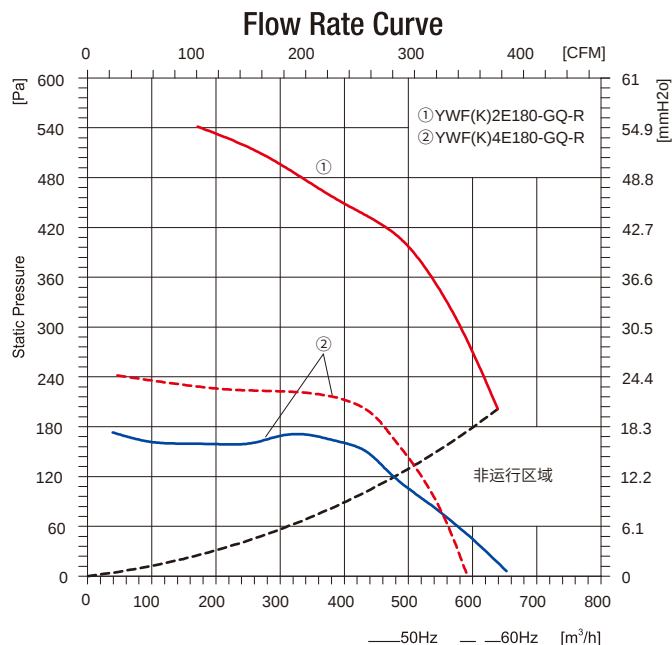


产品特点

电机技术: AC 外转子
电机工作制: S1 连续工作制
电机防护等级: IP54
电机绝缘等级: F
轴承: 免维护深沟球轴承
风轮材料: 镀锌钢板
外壳材料: 镀锌钢板
风轮旋向: 逆时针, 从引出线端看过去

Product Characteristic

Motor technology: AC Outer rotor
Mode of Operation: S1
Protection Class: IP54
Insulation Class: F
Bearings: Maintenance-free ball bearings
Impeller Material: Galvanised sheet steel
Housing Material: Galvanised sheet steel
Rotation: C.C.W, seen on the leads

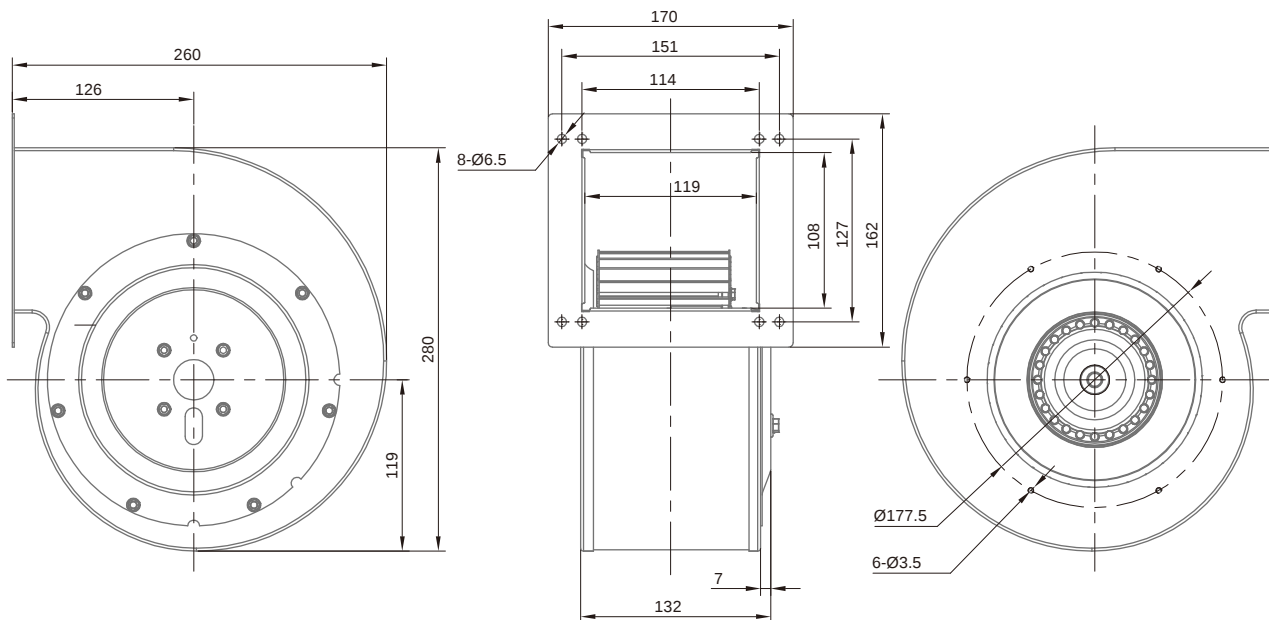

型号 Model	电压 Voltage (V)	频率 Frequency (Hz)	输入功率 Input Power (W)	电流 Current (A)	风量 Air Volume (m³/h)	转速 Speed (r/min)	电容 Capacitor (μF)	噪音 Noise [dB(A)]	允许最高环境温度 Max Environmental Temperature (°C)	重量 Weight (Kg)
YWF(K)2E180-GQ-R	230	50	280	1.2	640@200	1700	8	65	40	4.1
YWF(K)4E180-GQ-R	230	50/60	125/150	0.55/0.66	650/600	1050/1150	3	60	50	4.1