
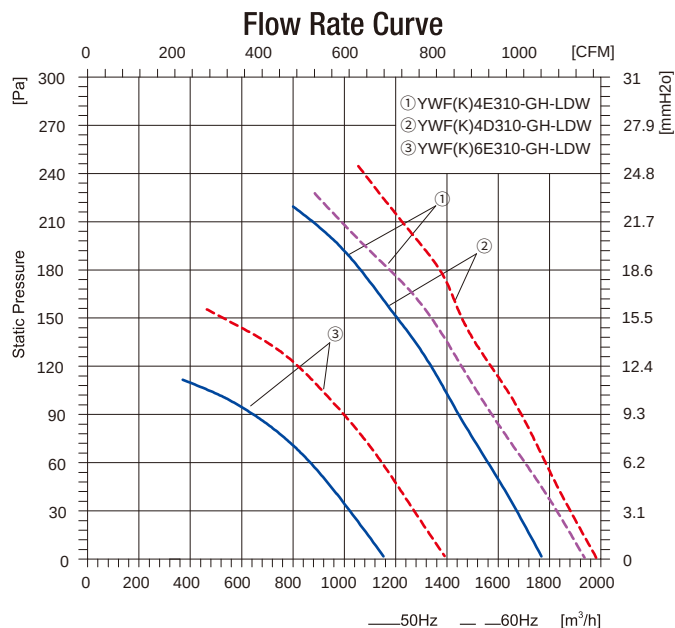



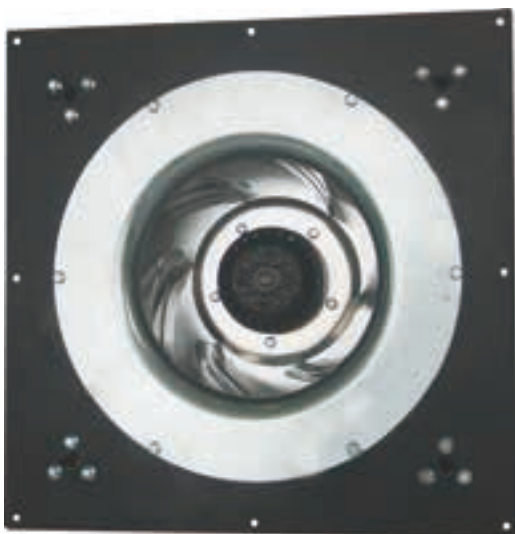


产品特点



电机技术: AC 外转子
电机工作制: S1 连续工作制
电机防护等级: IP54
电机绝缘等级: F
轴承: 免维护深沟球轴承
风轮类型: 后倾
风轮材料: 铝板
风轮旋向: 逆时针, 从引出线端看过去

Product Characteristic

Motor technology: AC Outer rotor
Mode of Operation: S1
Protection Class: IP54
Insulation Class: F
Bearings: Maintenance-free ball bearings
Impeller Type: Backward curved
Impeller Material: Sheet aluminium
Rotation: C.C.W, seen on the leads

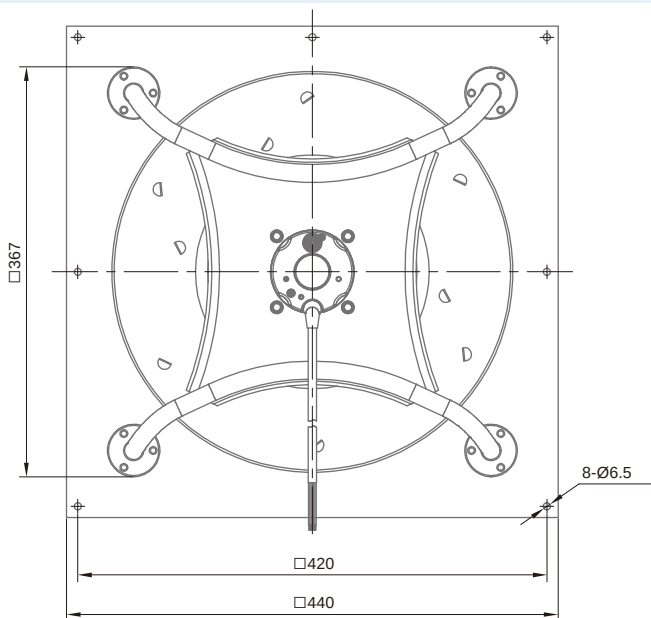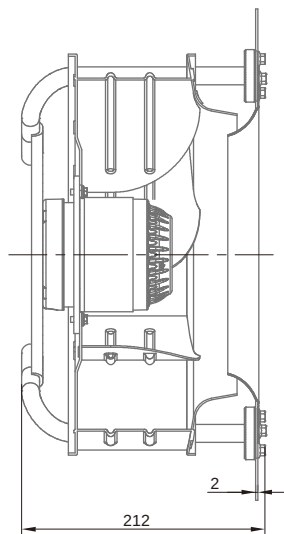

型号 Model	电压 Voltage (V)	频率 Frequency (Hz)	输入功率 Input Power (W)	电流 Current (A)	风量 Air Volume (m³/h)	转速 Speed (r/min)	电容 Capacitor (μF)	噪音 Noise [dB(A)]	允许最高环境温度 Max Environmental Temperature (°C)	重量 Weight (Kg)
YWF(K)4E310-GH-LDW	230	50/60	140/190	0.68/0.82	1650/1900	1370/1500	4	61	50	8.5
YWF(K)4D310-GH-LDW	400	50/60	150/185	0.39/0.35	1700/1950	1400/1560	-	62	50	8.5
YWF(K)6E310-GH-LDW	230	50/60	77/90	0.35/0.43	1160/1400	960/1150	3	53	60	8.5

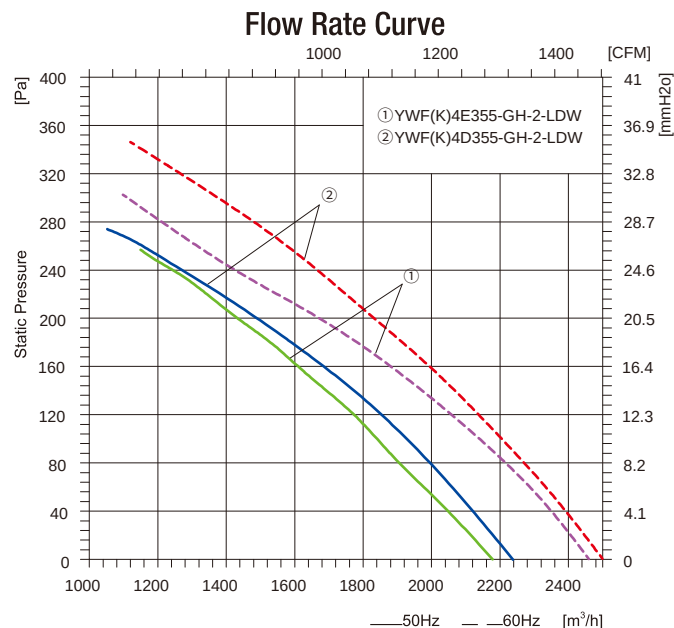
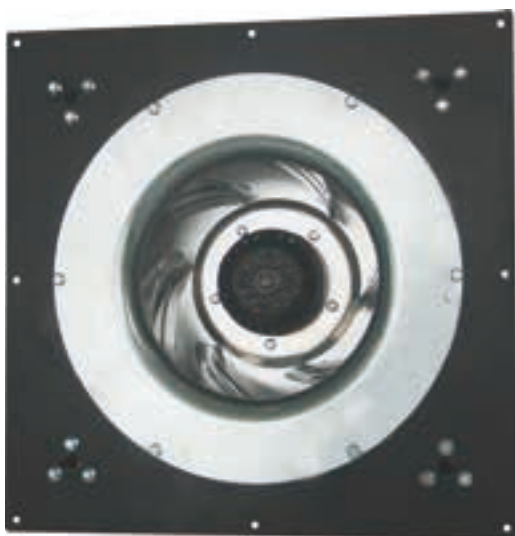


产品特点


电机技术: AC 外转子
电机工作制: S1 连续工作制
电机防护等级: IP54
电机绝缘等级: F
轴承: 免维护深沟球轴承
风轮材料: 铝板
风轮旋向: 逆时针, 从引出线端看过去

Product Characteristic


Motor technology: AC Outer rotor
Mode of Operation: S1
Protection Class: IP54
Insulation Class: F
Bearings: Maintenance-free ball bearings
Impeller Material: Sheet aluminium
Rotation: C.C.W, seen on the leads

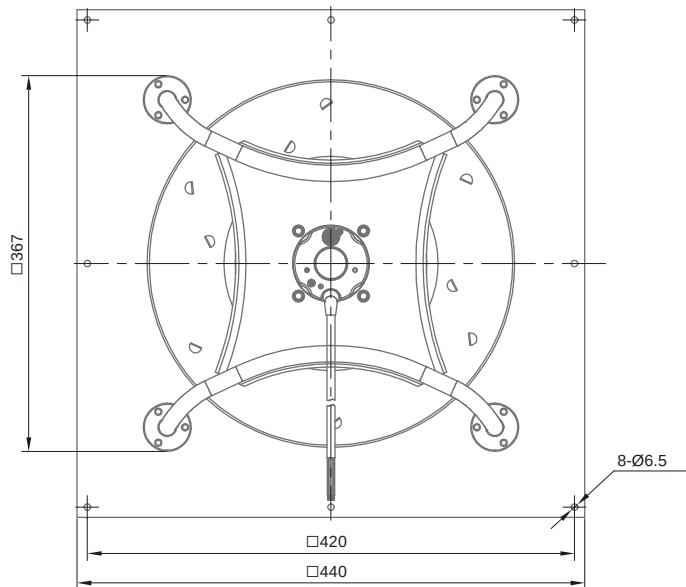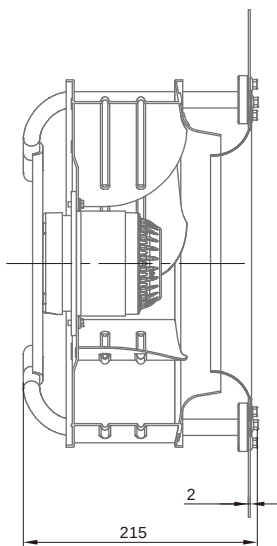

型号 Model	电压 Voltage (V)	频率 Frequency (Hz)	输入功率 Input Power (W)	电流 Current (A)	风量 Air Volume (m³/h)	转速 Speed (r/min)	电容 Capacitor (μF)	噪音 Noise [dB(A)]	允许最高环境温度 Max Environmental Temperature (°C)	重量 Weight (Kg)
YWF(K)4E355-GH2-LDW	230	50	220	1.0	2200	1360	6	64	70	9.5
	230	60	310	1.38	2500	1450	6	68	40	9.5
YWF(K)4D355-GH2-LDW	400	50	220	0.47	2200	1380	-	65	70	9.5
	400	60	310	0.48	2500	1500	-	67	50	9.5

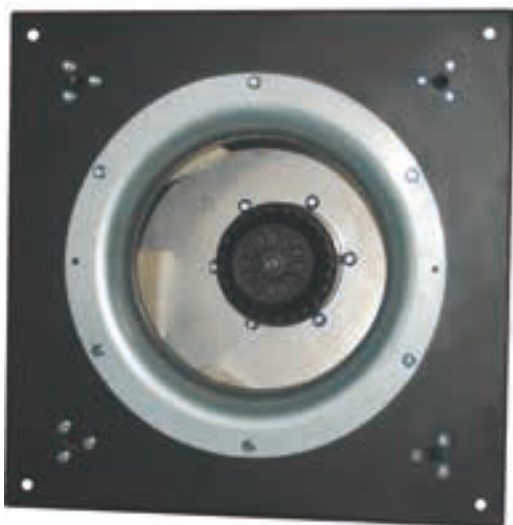

Flow Rate Curve


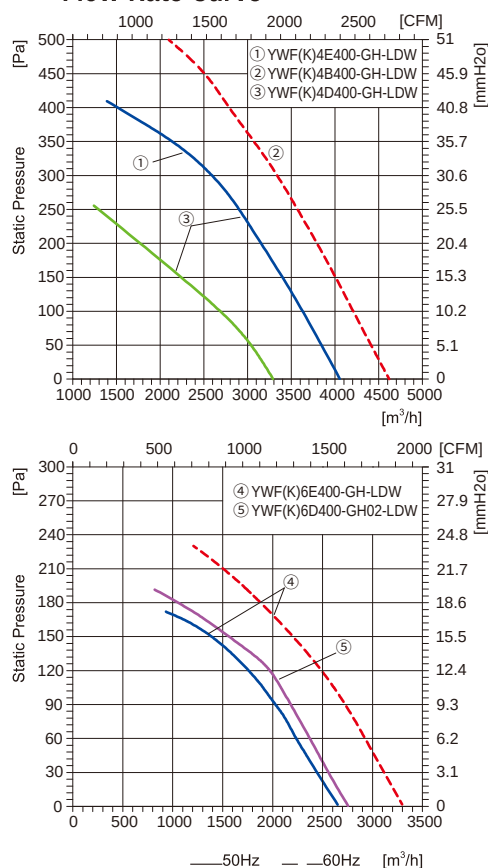


产品特点


电机技术: AC 外转子
电机工作制: S1 连续工作制
电机防护等级: IP54
电机绝缘等级: F
轴承: 免维护深沟球轴承
风轮材料: 铝板
风轮旋向: 逆时针, 从引出线端看过去

Product Characteristic

Motor technology: AC Outer rotor
Mode of Operation: S1
Protection Class: IP54
Insulation Class: F
Bearings: Maintenance-free ball bearings
Impeller Material: Sheet aluminium
Rotation: C.C.W, seen on the leads

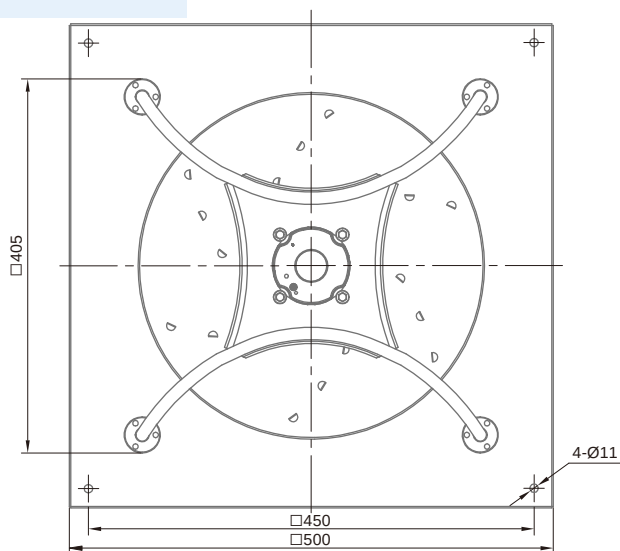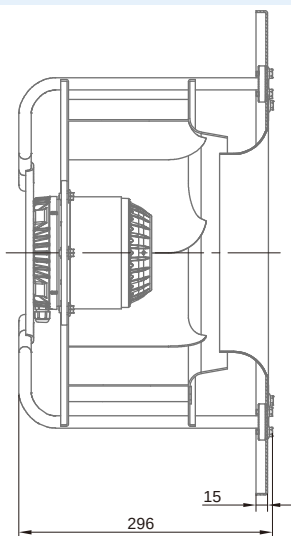

型号 Model	电压 Voltage (V)	频率 Frequency (Hz)	输入功率 Input Power (W)	电流 Current (A)	风量 Air Volume (m³/h)	转速 Speed (r/min)	电容 Capacitor (μF)	噪音 Noise [dB(A)]	允许最高环境温度 Max Environmental Temperature (°C)	重量 Weight (Kg)
YWF(K)4E400-GH-LDW	230	50	560	2.46	4100	1350	10	66	50	15.0
YWF(K)4B400-GH-LDW	115	60	820	7.1	4600	1550	50	71	70	17.0
YWF(K)4D400-GH-LDW	400 △/Y	50	540/350	1/0.53	4100	1350/1070	-	66	50	14.0
YWF(K)6E400-GH-LDW	230	50	180	0.83	2700	920	5	50	60	14.0
YWF(K)6D400-GH02-LDW	230/400 △/Y	50	250	1.26/0.73	2750	900	-	50	60	14.0

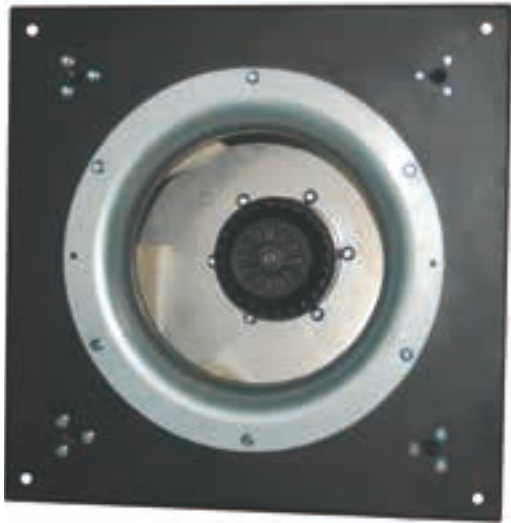





产品特点

电机技术: AC 外转子
电机工作制: S1 连续工作制
电机防护等级: IP54
电机绝缘等级: F
轴承: 免维护深沟球轴承
风轮材料: 铝板
风轮旋向: 逆时针, 从引出线端看过去


Product Characteristic

Motor technology: AC Outer rotor
Mode of Operation: S1
Protection Class: IP54
Insulation Class: F
Bearings: Maintenance-free ball bearings
Impeller Material: Sheet aluminium
Rotation: C.C.W, seen on the leads

Flow Rate Curve

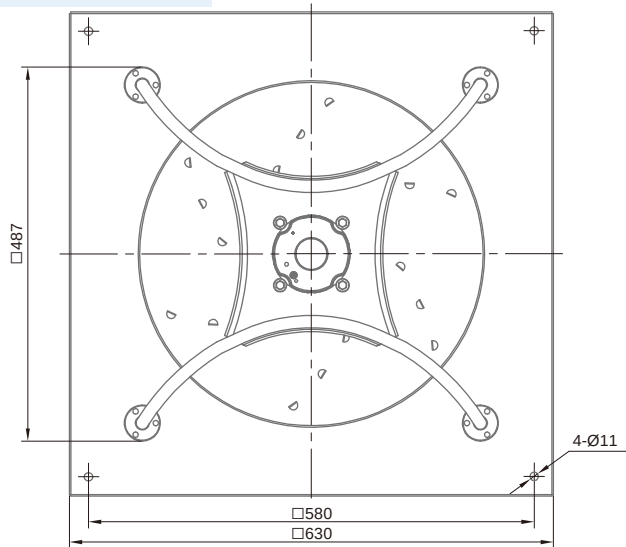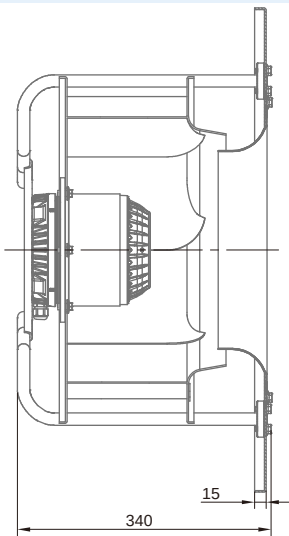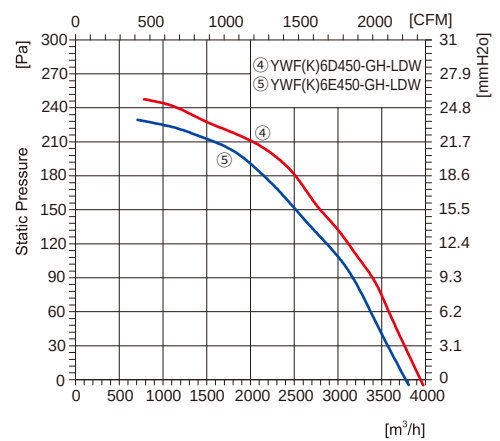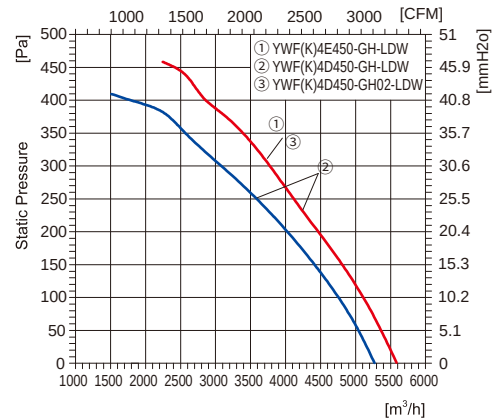

型号 Model	电压 Voltage (V)	频率 Frequency (Hz)	输入功率 Input Power (W)	电流 Current (A)	风量 Air Volume (m³/h)	转速 Speed (r/min)	电容 Capacitor (μF)	噪音 Noise [dB(A)]	允许最高 环境温度 Max Environmental Temperature (°C)	重量 Weight (Kg)
YWF(K)4E450-GH-LDW	230	50	830	4.1	5600	1340	14	74	50	19.5
YWF(K)4D450-GH-LDW	400 △/Y	50	690/350	1.26/0.58	5100	1280/1080	-	74	50	17.5
YWF(K)4D450-GH02-LDW	230/400 △/Y	50	810	2.35/1.36	5600	1260	-	74	60	19.5
YWF(K)6D450-GH-LDW	400 △/Y	50	330	0.9	4000	940	-	60	60	17.5
YWF(K)6E450-GH-LDW	230	50	300	1.4	3900	900	10	60	60	17.5

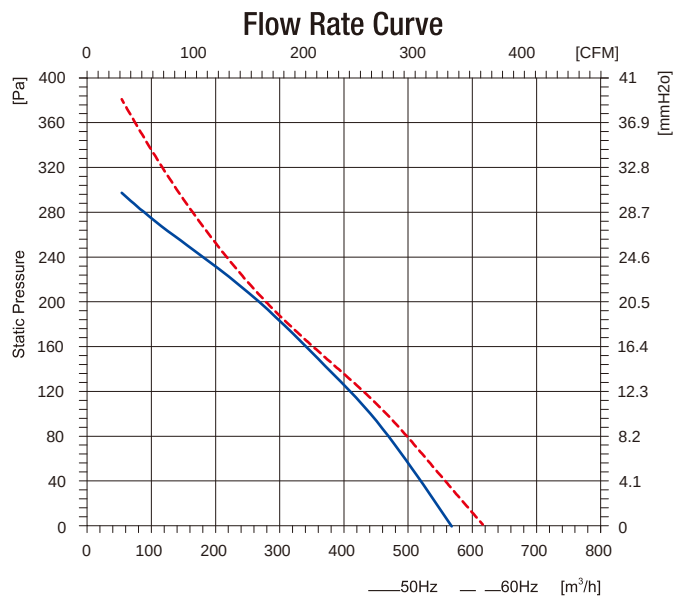


产品特点

电机技术: AC 外转子
电机工作制: S1 连续工作制
电机防护等级: IP54
电机绝缘等级: F
轴承: 免维护深沟球轴承
风轮类型: 后倾
风轮材料: 塑胶
风轮旋向: 逆时针, 从引出线端看去

Product Characteristic

Motor technology: AC Outer rotor
Mode of Operation: S1
Protection Class: IP54
Insulation Class: F
Bearings: Maintenance-free ball bearings
Impeller Type: Backward curved
Impeller Material: Plastic
Rotation: C.C.W, seen on the leads

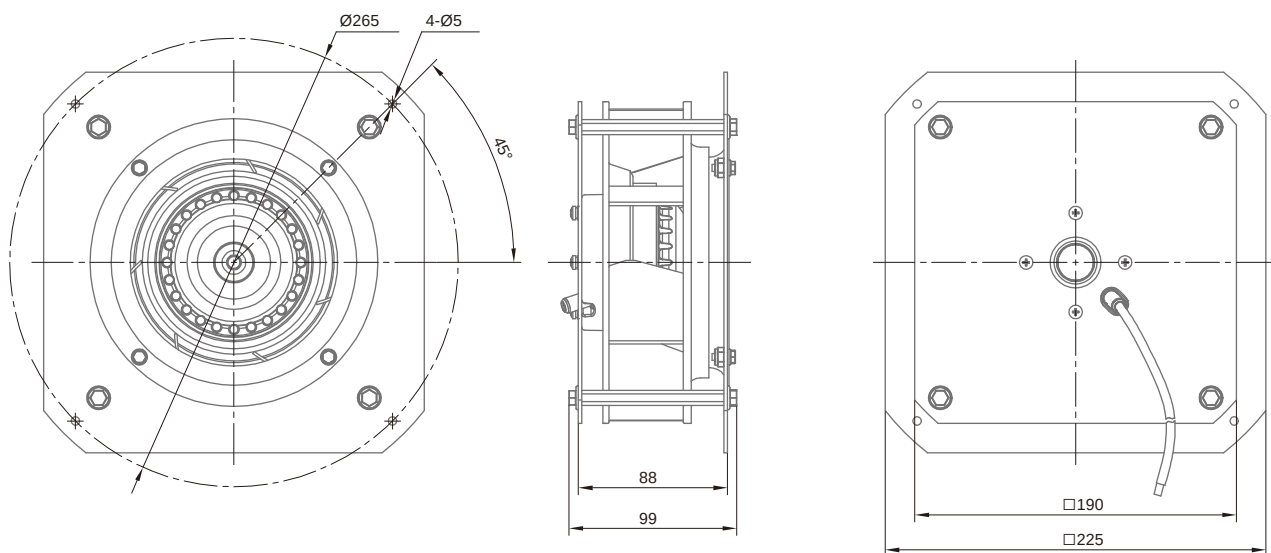

型号 Model	电压 Voltage (V)	频率 Frequency (Hz)	输入功率 Input Power (W)	电流 Current (A)	风量 Air Volume (m³/h)	转速 Speed (r/min)	电容 Capacitor (μF)	噪音 Noise [dB(A)]	允许最高环境温度 Max Environmental Temperature (°C)	重量 Weight (Kg)
YWF(K)2E192-GH-LDW	230	50/60	70/90	0.3/0.4	570/620	2450/2650	2	62/64	50	2.4