



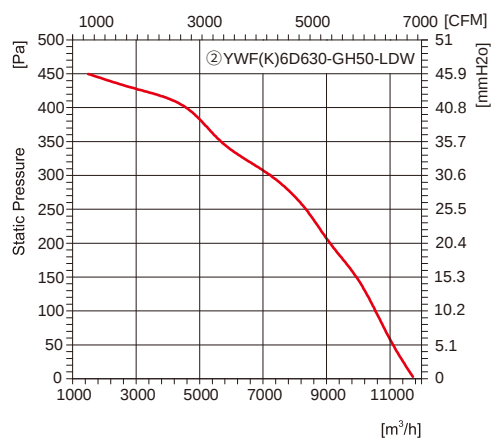

Flow Rate Curve


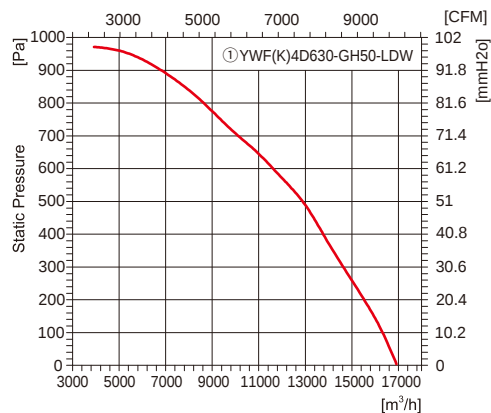


产品特点

电机技术: AC 外转子
电机工作制: S1 连续工作制
电机防护等级: IP54
电机绝缘等级: F
轴承: 免维护深沟球轴承
风轮材料: 铝板
风轮旋向: 逆时针, 从引出线端看过去

Product Characteristic

Motor technology: AC Outer rotor
Mode of Operation: S1
Protection Class: IP54
Insulation Class: F
Bearings: Maintenance-free ball bearings
Impeller Material: Sheet aluminium
Rotation: C.C.W, seen on the leads

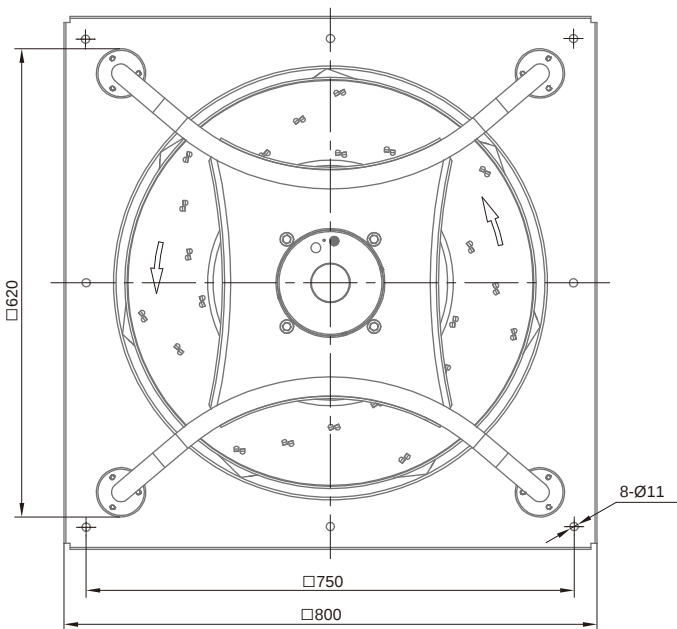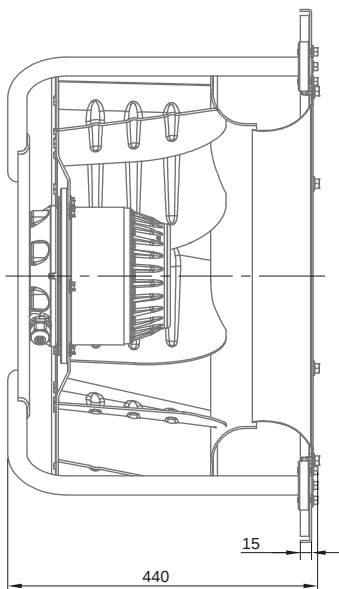

型号 Model	电压 Voltage (V)	频率 Frequency (Hz)	输入功率 Input Power (W)	电流 Current (A)	风量 Air Volume (m³/h)	转速 Speed (r/min)	电容 Capacitor (µF)	噪音 Noise [dB(A)]	允许最高环境温度 Max Environmental Temperature (°C)	重量 Weight (Kg)
YWF(K)4D630-GH50-LDW	230/400 △/Y	50	4300	11.8/6.8	15000	1370	-	81	60	64.0
YWF(K)6D630-GH50-LDW	230/400 △/Y	50	1200	4.68/2.7	11750	900	-	76	50	44.0







产品特点

电机技术: AC 外转子
电机工作制: S1 连续工作制
电机防护等级: IP54
电机绝缘等级: F
轴承: 免维护深沟球轴承
风轮材料: 铝板
风轮旋向: 逆时针, 从引出线端看过去


Product Characteristic

Motor technology: AC Outer rotor
Mode of Operation: S1
Protection Class: IP54
Insulation Class: F
Bearings: Maintenance-free ball bearings
Impeller Material: Sheet aluminium
Rotation: C.C.W, seen on the leads

Flow Rate Curve

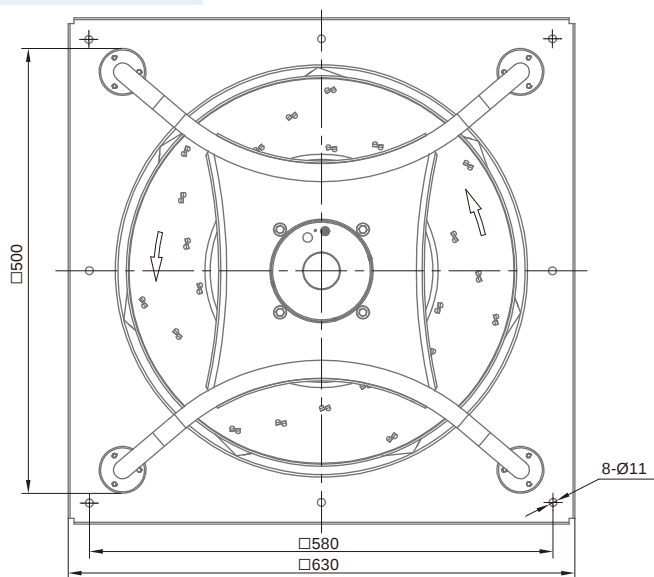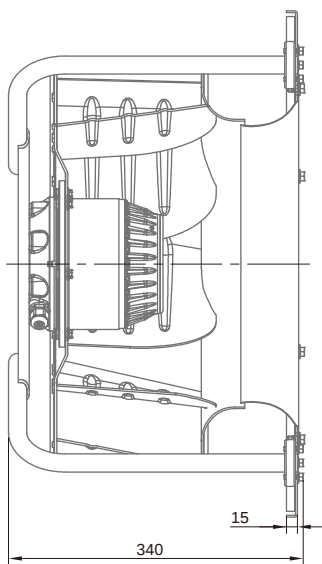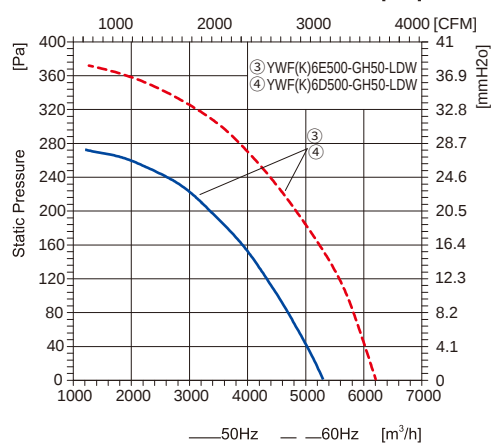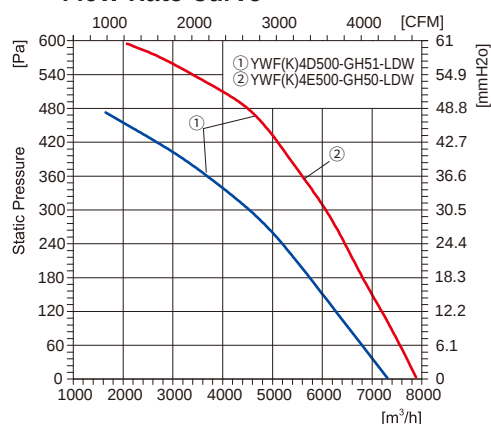

型号 Model	电压 Voltage (V)	频率 Frequency (Hz)	输入功率 Input Power (W)	电流 Current (A)	风量 Air Volume (m³/h)	转速 Speed (r/min)	电容 Capacitor (μF)	噪音 Noise [dB(A)]	允许最高环境温度 Max Environmental Temperature (°C)	重量 Weight (Kg)
YWF(K)4D500-GH51-LDW	400 △/Y	50	1300/1100	2.65/1.6	7980/7310	1400/1030	-	77	50	29.5
YWF(K)4E500-GH50-LDW	230	50	1550	6.8	7900	1380	31	77	40	29.5
YWF(K)6E500-GH50-LDW	230	50/60	430/650	2.1/3.1	5300/6200	950/1100	19	65/68	60	29.5
YWF(K)6D500-GH50-LDW	230/400 △/Y	50/60	390/600	2.17/1.25	5300/6200	950/1100	-	66/69	60	29.5


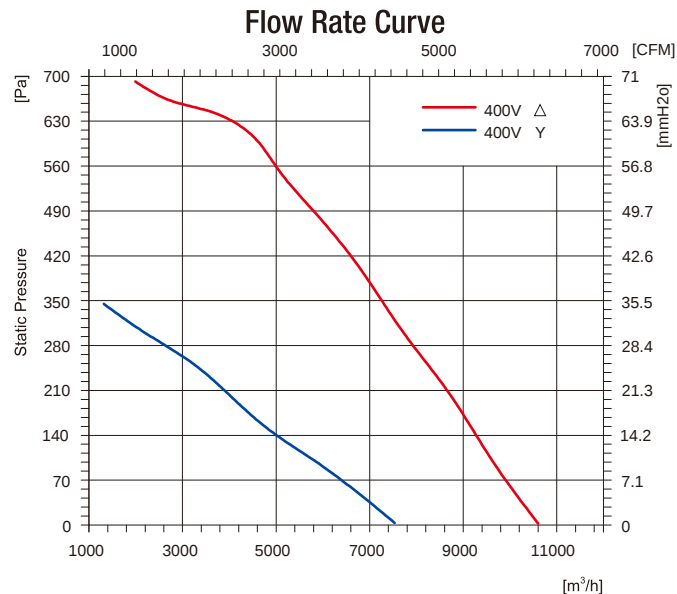


产品特点

电机技术: AC 外转子
电机工作制: S1 连续工作制
电机防护等级: IP54
电机绝缘等级: F
轴承: 免维护深沟球轴承
风轮材料: 铝板
风轮旋向: 逆时针, 从引出线端看过去

Product Characteristic

Motor technology: AC Outer rotor
Mode of Operation: S1
Protection Class: IP54
Insulation Class: F
Bearings: Maintenance-free ball bearings
Impeller Material: Sheet aluminium
Rotation: C.C.W, seen on the leads

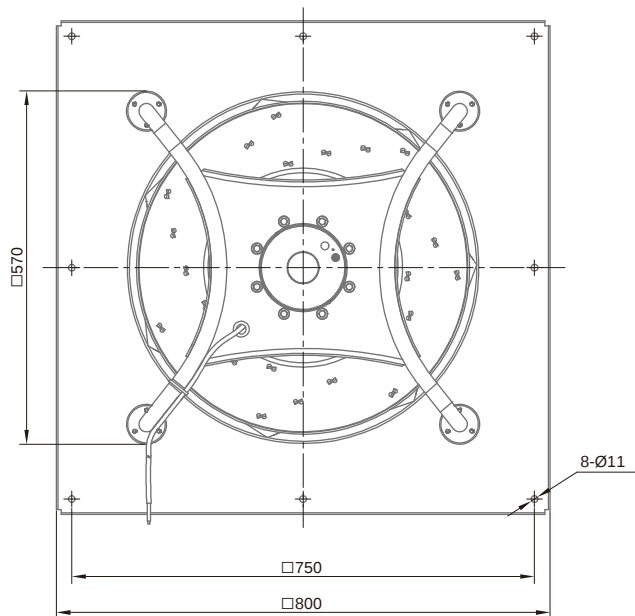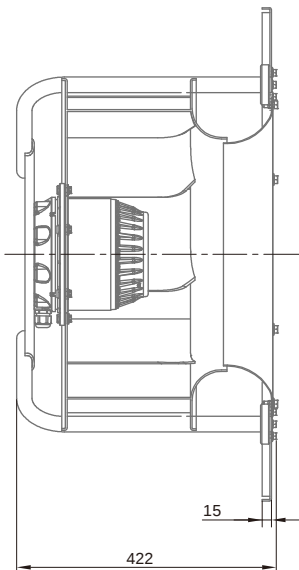

型号 Model	电压 Voltage (V)	频率 Frequency (Hz)	输入功率 Input Power (W)	电流 Current (A)	风量 Air Volume (m³/h)	转速 Speed (r/min)	电容 Capacitor (μF)	噪音 Noise [dB(A)]	允许最高环境温度 Max Environmental Temperature (°C)	重量 Weight (Kg)
YWF(K)4D560-GH-LDW	400 Δ/Y	50	1850/850	3.6/1.75	10500	1200/780	-	79	40	41.0






产品特点

电机技术: AC 外转子
电机工作制: S1 连续工作制
电机防护等级: IP54
电机绝缘等级: F
轴承: 免维护深沟球轴承
风轮材料: 铝板
风轮旋向: 逆时针, 从引出线端看过去

Product Characteristic

Motor technology: AC Outer rotor
Mode of Operation: S1
Protection Class: IP54
Insulation Class: F
Bearings: Maintenance-free ball bearings
Impeller Material: Sheet aluminium
Rotation: C.C.W, seen on the leads


Flow Rate Curve

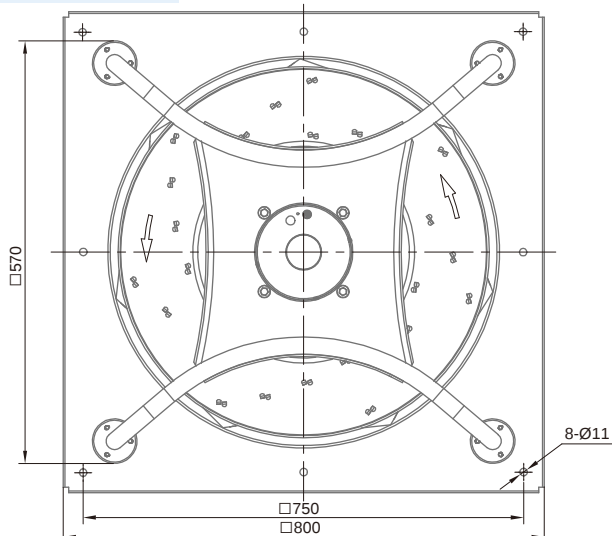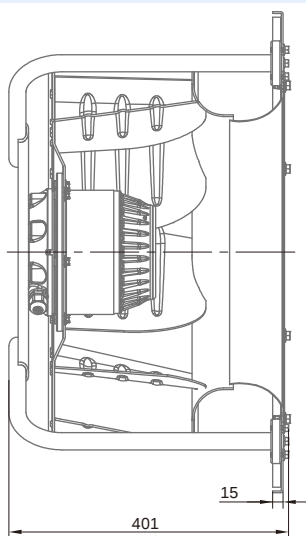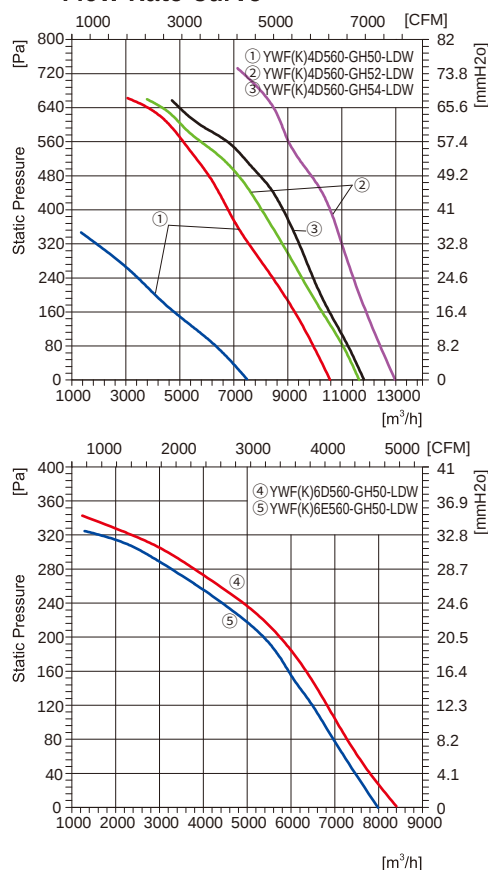

型号 Model	电压 Voltage (V)	频率 Frequency (Hz)	输入功率 Input Power (W)	电流 Current (A)	风量 Air Volume (m³/h)	转速 Speed (r/min)	电容 Capacitor (μF)	噪音 Noise [dB(A)]	允许最高环境温度 Max Environmental Temperature (°C)	重量 Weight (Kg)
YWF(K)4D560-GH50-LDW	400 △/Y	50	1800/850	3.4/1.68	11000/7770	1290/900	-	79	45	41.0
YWF(K)4D560-GH52-LDW	400 △/Y	50	2700/2070	4.78/3.3	13000/11700	1400/1270	-	81	50	45.0
YWF(K)4D560-GH54-LDW	400 △	50	2300	3.7	12000	1325	-	81	50	42.0
YWF(K)6D560-GH50-LDW	230/400 △/Y	50	780	2.69/1.55	8400	870	-	69	50	37.0
YWF(K)6E560-GH50-LDW	230	50	700	3.1	8400	900	19	69	50	37.0



Flow Rate Curve


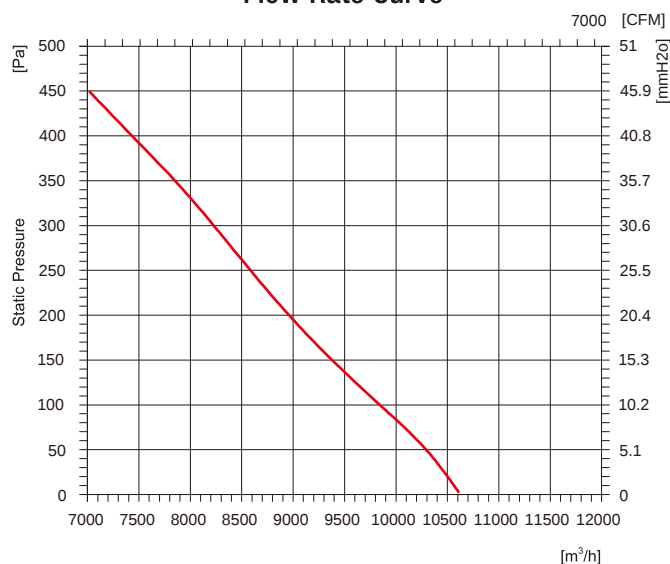


产品特点

电机技术: AC 外转子
电机工作制: S1 连续工作制
电机防护等级: IP54
电机绝缘等级: F
轴承: 免维护深沟球轴承
风轮材料: 铝板
风轮旋向: 逆时针, 从引出线端看过去

Product Characteristic

Motor technology: AC Outer rotor
Mode of Operation: S1
Protection Class: IP54
Insulation Class: F
Bearings: Maintenance-free ball bearings
Impeller Material: Sheet aluminium
Rotation: C.C.W, seen on the leads

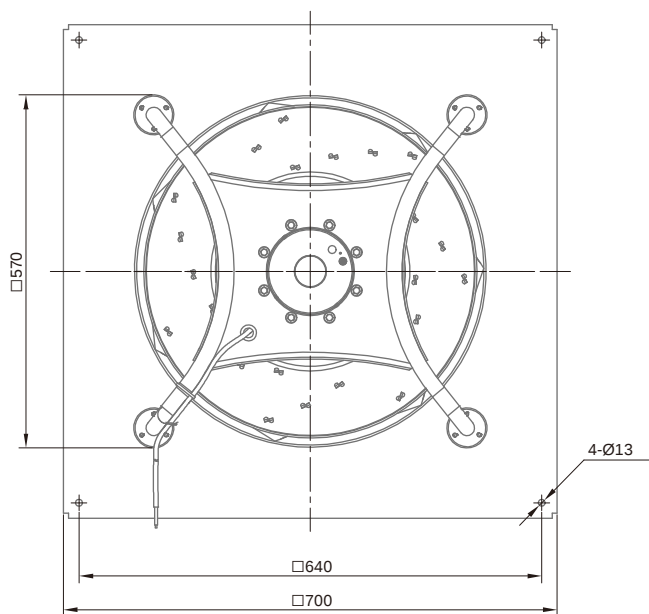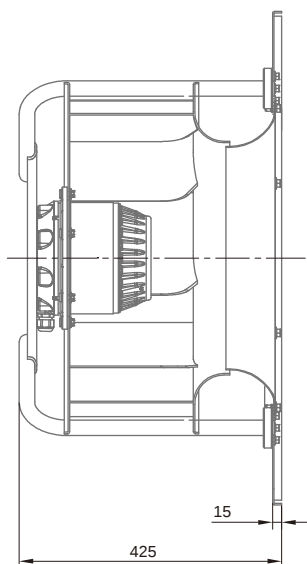

型号 Model	电压 Voltage (V)	频率 Frequency (Hz)	输入功率 Input Power (W)	电流 Current (A)	风量 Air Volume (m³/h)	转速 Speed (r/min)	电容 Capacitor (μF)	噪音 Noise [dB(A)]	允许最高 环境温度 Max Environmental Temperature (°C)	重量 Weight (Kg)
YWF(K)4T560-GH10-LDW	230/400 △/Y	50	2200	6.5/3.7	10600	1250	-	79	50	41.0