



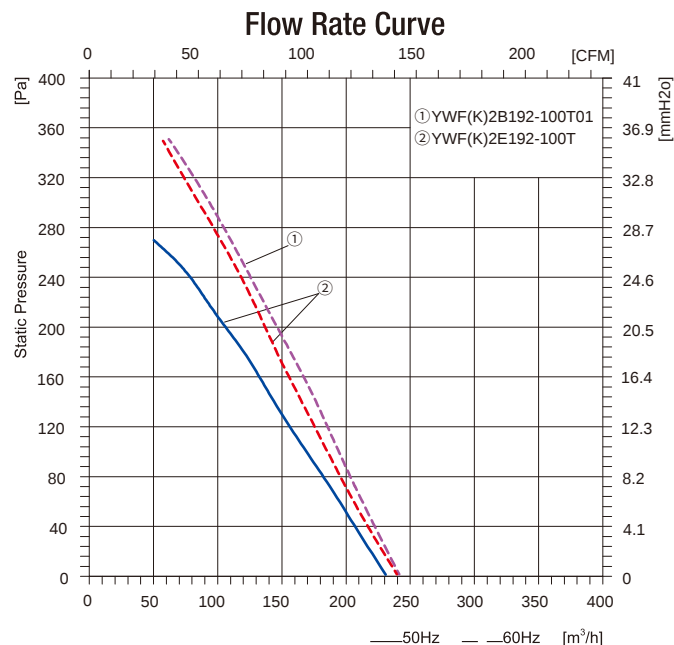


产品特点

电机技术: AC 外转子
电机工作制: S1 连续工作制
电机防护等级: IP54
电机绝缘等级: F
轴承: 免维护深沟球轴承
风轮材料: 塑胶
外壳材料: 镀锌钢板
风轮旋向: 逆时针, 从引出线端看过去


Product Characteristic

Motor technology: AC Outer rotor
Mode of Operation: S1
Protection Class: IP54
Insulation Class: F
Bearings: Maintenance-free ball bearings
Impeller Material: Plastic
Housing Material: Galvanised sheet steel
Rotation: C.C.W, seen on the leads

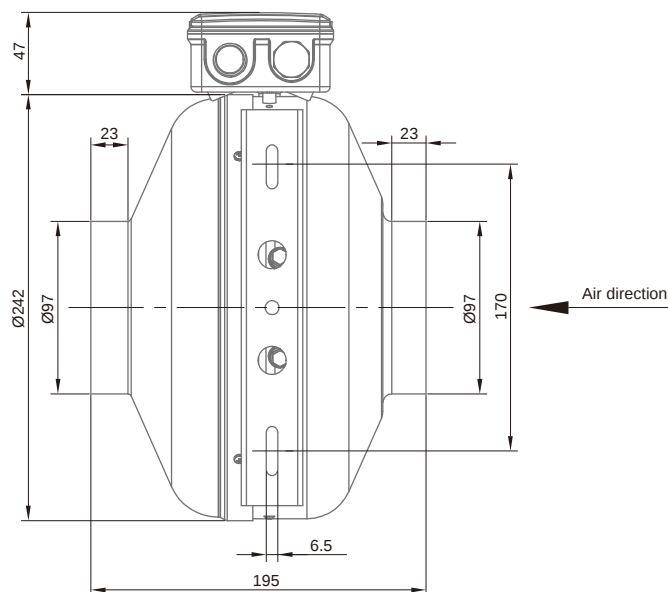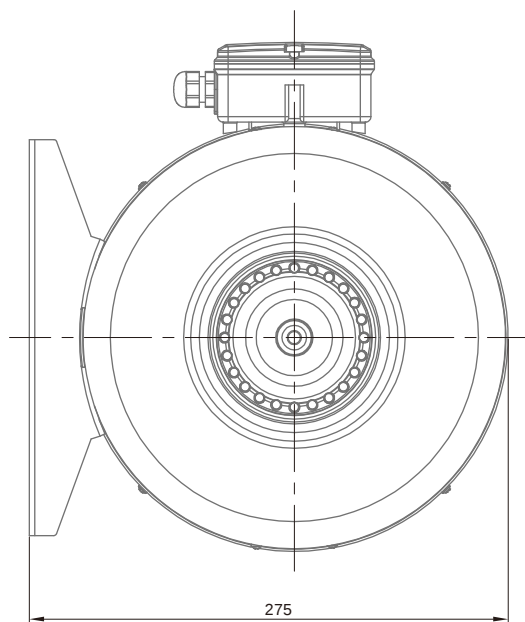

型号 Model	电压 Voltage (V)	频率 Frequency (Hz)	输入功率 Input Power (W)	电流 Current (A)	风量 Air Volume (m³/h)	转速 Speed (r/min)	电容 Capacitor (μF)	噪音 Noise [dB(A)]	允许最高环境温度 Max Environmental Temperature (°C)	重量 Weight (Kg)
YWF(K)2B192-100T01	120	60	80	0.67	240	2700	8	60	60	3.2
YWF(K)2E192-100T	230	50/60	70/90	0.3/0.4	230/240	2500/2600	2	59/60	60/70	3.2

ErP
2020


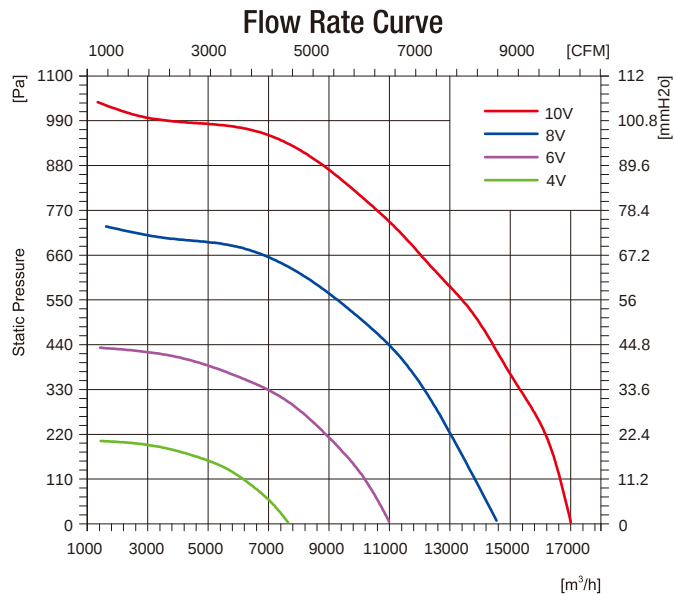


产品特点

电机技术: EC 外转子
工作电压: 三相, 380-480V, 50/60Hz
电机工作制: S1 连续工作制
电机防护等级: IP54
电机绝缘等级: F
轴承: 免维护深沟球轴承
风轮类型: 后倾
风轮材料: 铝板
风轮旋向: 逆时针, 从引出线端看过去
工作环境温度: -25°C ~ +50°C
内部集成控制器, 0-10V 或 PWM 控制

Product Characteristic

Motor technology: EC Outer rotor
Supply voltage: 3~, 380-480V, 50/60Hz
Mode of Operation: S1
Protection Class: IP54
Insulation Class: F
Bearings: Maintenance-free ball bearings
Impeller Type: Backward curved
Impeller Material: Sheet aluminium
Rotation: C.C.W, seen on the leads
Perm. amb. temp.: -25°C ~ +50°C
Controller Integrated, 0-10V or PWM Control

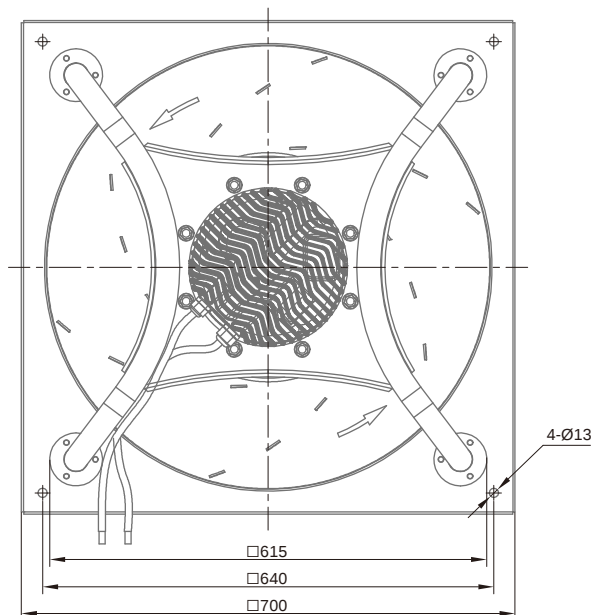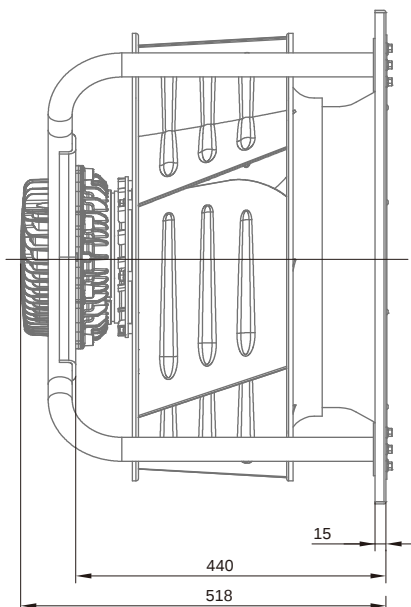

型 号 Model	电 压 Voltage (V)	频 率 Frequency (Hz)	输入功率 Input Power (W)	电 流 Current (A)	风 量 Air Volume (m³/h)	转 速 Speed (r/min)	噪 音 Noise [dB(A)]	允许最高 环境温度 Max Environmental Temperature (°C)	重 量 Weight (Kg)
ECF(K)8D630-PLHDL4	400	50/60	3760	5.7	17000	1400	79	50	64.0