


LXF 双进风离心风机 Dual Inlet Centrifugal Fans (AC)

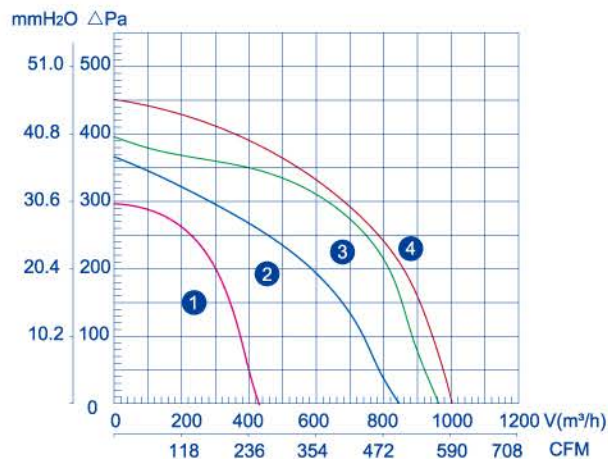


使用说明:

工作方式: S1
绝缘等级: F级
环境温度: -25℃~+60℃
防护等级: IP44


Instructions:

Operation mode: S1
Insulation class: F
Ambient temperature: -25℃~+60℃
Type of protection: IP44

Type 型号	Rated voltage 额定电压 V	Frequency 频率 Hz	Current 额定电流 A	Input power 输入功率 W	Rated speed 额定转速 r/min	AIR FLOW 最大风量 m ³ /h	Capacitance 电容 μF	Noise level 噪音 dBA	Net weight 净重 kg	Curve 曲线
LXFFD2E120/120-M92/35-****	220	50	0.86	185	2150	480	3	67	3.5	1
LXFFD2E133/190-M92/35-****	220	50	1.09	242	1720	840	6	68	3.9	2
LXFFD2E133/190-M92/45-****	220	50	1.38	300	1800	980	8	70	4.3	3
LXFFD2E146/190-M92/45-****	220	50	1.40	310	1600	1000	8	72	4.7	4

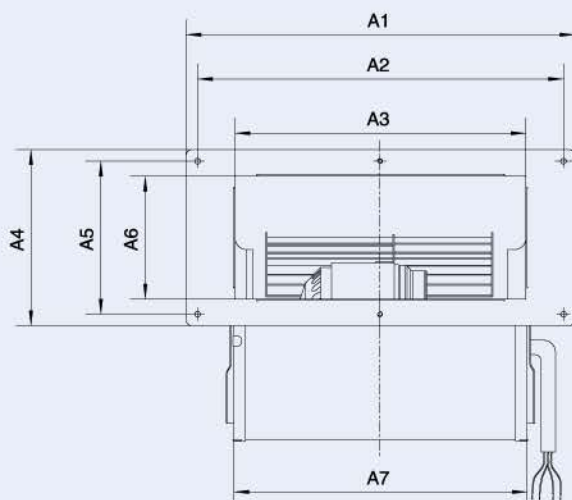

Type	A1	A2	A3	A4	A5	A6	A7
120	180	168	143	100	88	71.5	145
133	254	238	213	108	92	79	215
133-232	310	290	230	140	121	98	232
146	310	290	230	140	121	98	232

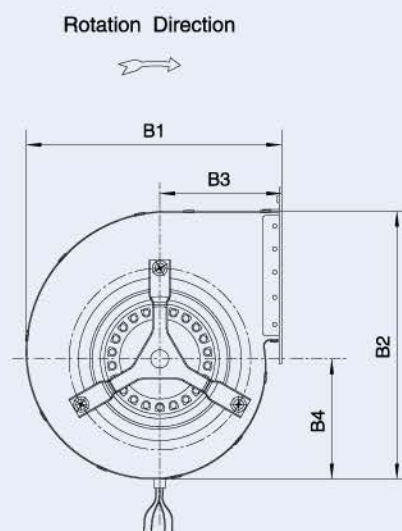

Type	B1	B2	B3	B4
120	159.5	161	79	73
133	175.0	182	87.5	81
133-232	206	213	97.5	106
146	204	213	97.5	106

双进风风机 Dual-inlet fan 8146/151



使用说明:

工作方式: S1
绝缘等级: F级
环境温度: -25℃~+60℃
防护等级: IP44
产品符合的认证: CCC、CE

结构:

A、蜗壳材料为塑料
B、电机采用滚珠轴承


Instructions:

Operation mode: S1
Insulation class: F
Ambient temperature: -25℃~+60℃
Type of protection: IP44
Approvals: CCC、CE


Construction:

A、The volute material is plastic.
B、Motors are with ball bearings.

压力/风量

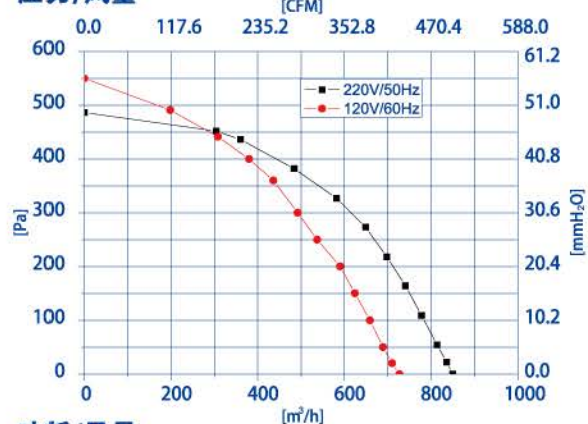

功耗/风量

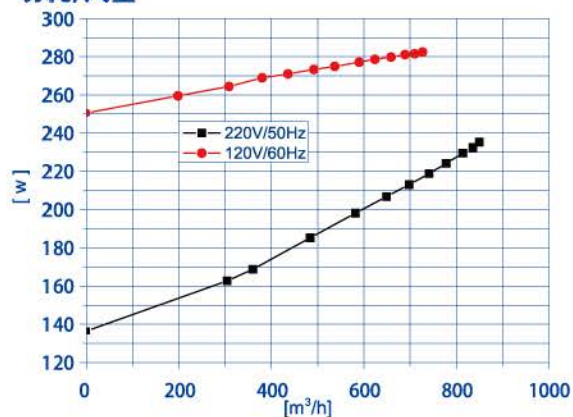

Type 型号	Voltage range 电压范围 V	Rated voltage 额定电压 V	Frequency 频率 Hz	Current 额定电流 A	Input power 输入功率 W	Rated speed 额定转速 r/min	AIR FLOW 最大风量 m³/h	Capacitance 电容 μF	Noise level 噪音 dBA	Net weight 净重 kg
LXFFD2E146/151-M92/35-AA01	220-240	220	50	1.10	240	1560	850	6	70	3.6
LXFFD2E146/151-M92/35-AA02	110-120	120	60	2.20	280	2550	730	22	72	4.1

