


LXF 交流前倾式离心风机 Forward Centrifugal Fans(AC)

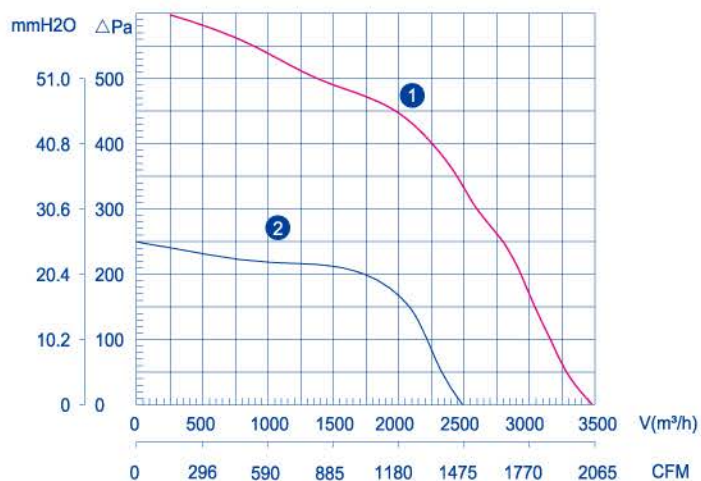


使用说明:

工作方式: S1
绝缘等级: F级
环境温度: -25℃~+60℃
防护等级: IP44


Instructions:

Operation mode: S1
Insulation class: F
Ambient temperature: -25℃~+60℃
Type of protection: IP44

Type 型号	Rated voltage 额定电压 V	Frequency 频率 Hz	Current 额定电流 A	Input power 输入功率 W	Rated speed 额定转速 r/min	AIR FLOW 最大风量 m³/h	Capacitance 电容 μF	Noise level 噪音 dBA	Net weight 净重 kg	Curve 曲线
LXFF4D280/112-M168/50-****	400	50	2.78	1680	1330	3500		85	14.5	①
LXFF6D280/112-M168/50-****	400	50	1.43	570	940	2500		75	14.5	②

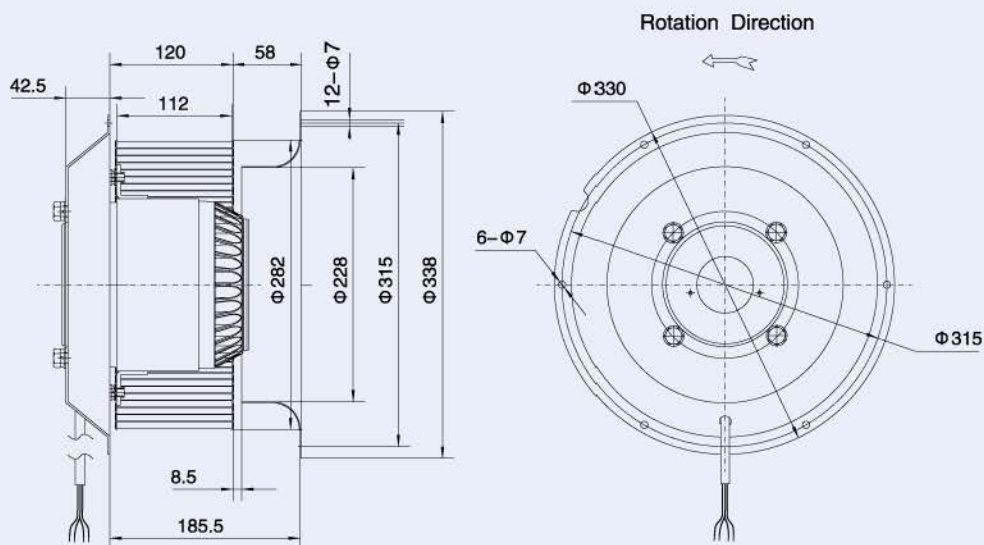

LXF 交流前倾式离心风机 Forward Centrifugal Fans(AC)

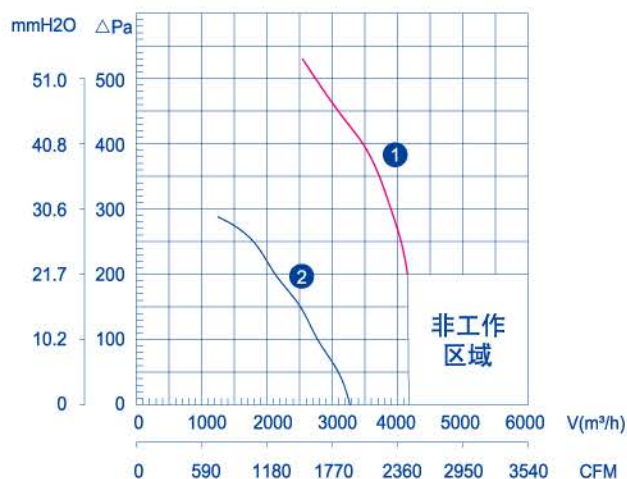

使用说明:

工作方式: S1
绝缘等级: F级
环境温度: -25℃~+60℃
防护等级: IP44

Instructions:

Operation mode: S1
Insulation class: F
Ambient temperature: -25℃~+60℃
Type of protection: IP44

Type 型号	Rated voltage V 额定电压	Frequency Hz 频率	Current A 额定电流	Input power W 输入功率	Rated speed r/min 额定转速	AIR FLOW m³/h 最大风量	Capacitance μF 电容	Noise level dBA 噪音	Net weight kg 净重	Curve 曲线
LXFF4D315/125-M180/75-****	400	50	4.0	2375	1370	4250		87	20.7	①
LXFF6D315/125-M180/75-****	400	50	1.8	850	930	3260		77	20.7	②

