

YWF92 外转子电机 External roter Motor







使用说明:

工作方式: S1
绝缘等级: F级
环境温度: -25℃~+60℃
防护等级: IP44


Instructions:

Operation mode: S1
Insulation class: F
Ambient temperature: -25℃~+60℃
Type of protection: IP44

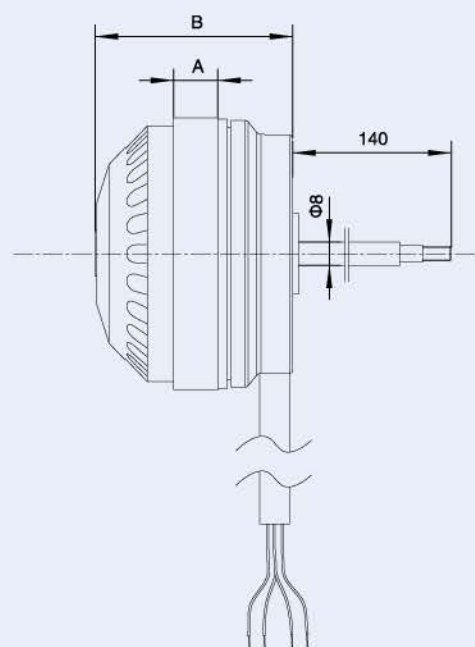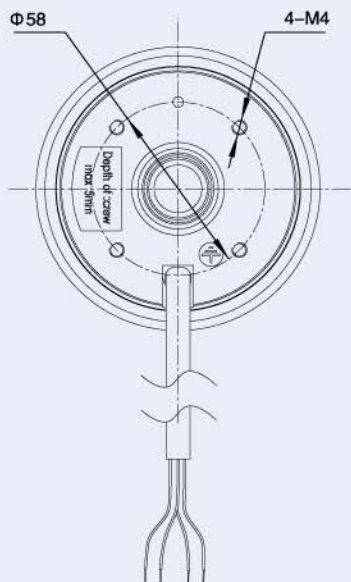

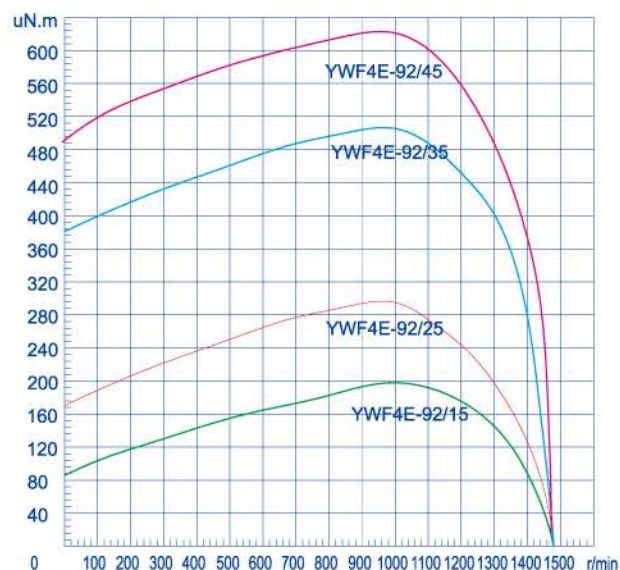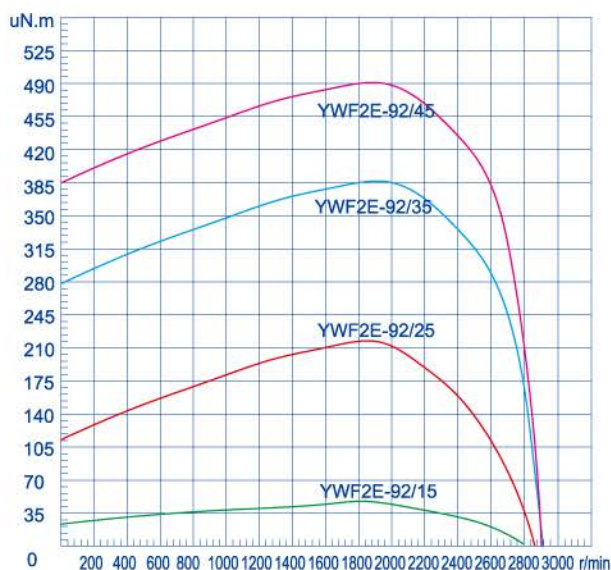

Type 型号	Motor 电机	Rated voltage V	Frequency Hz	Current A	Input power W	Rated speed r/min	Capacitance μF	Size 尺寸		Net weight kg
								A	B	
YWF2E-92/15-J	YWF2E-92/15-D	220	50	0.26	55	2300	2	15	66	1
YWF2E-92/25-J	YWF2E-92/25-D	220	50	0.40	80	2400	3	25	76	1.5
YWF2E-92/35-J	YWF2E-92/35-D	220	50	0.66	145	2300	4	35	86	2
YWF2E-92/45-J	YWF2E-92/45-D	220	50	0.96	150	2600	6	45	96	2.2
YWF4E-92/15-J	YWF4E-92/15-D	220	50	0.21	40	1400	1.5	15	66	1
YWF4E-92/25-J	YWF4E-92/25-D	220	50	0.23	50	1380	2	25	76	1.5
YWF4E-92/35-J	YWF4E-92/35-D	220	50	0.42	85	1350	3	35	86	2
YWF4E-92/45-J	YWF4E-92/45-D	220	50	0.60	130	1350	4	45	96	2.2

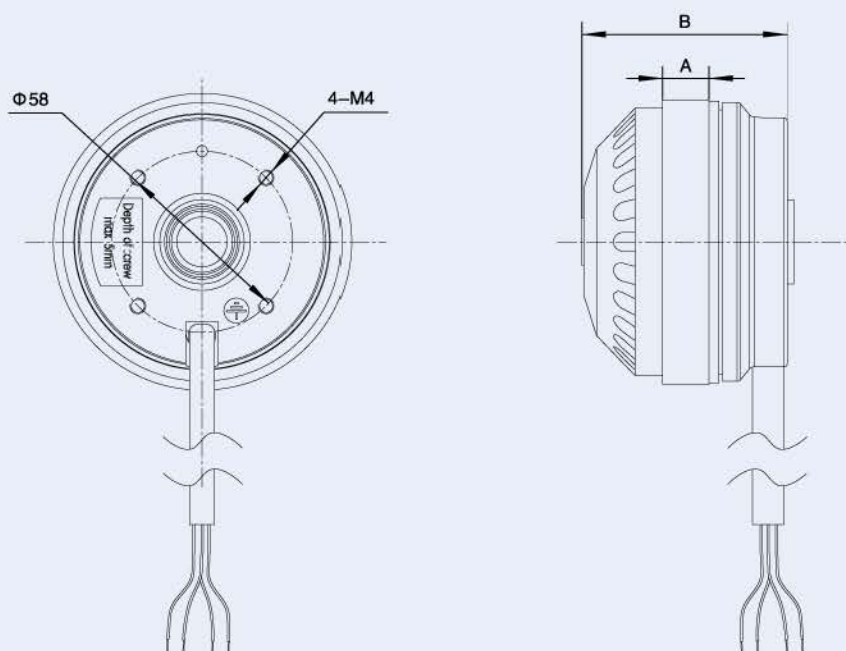

YWF92 外转子电机 External roter Motor




使用说明:

工作方式: S1
绝缘等级: F级
环境温度: $-25^{\circ}\text{C} \sim +60^{\circ}\text{C}$
防护等级: IP44


Instructions:

Operation mode: S1
Insulation class: F
Ambient temperature: $-25^{\circ}\text{C} \sim +60^{\circ}\text{C}$
Type of protection: IP44

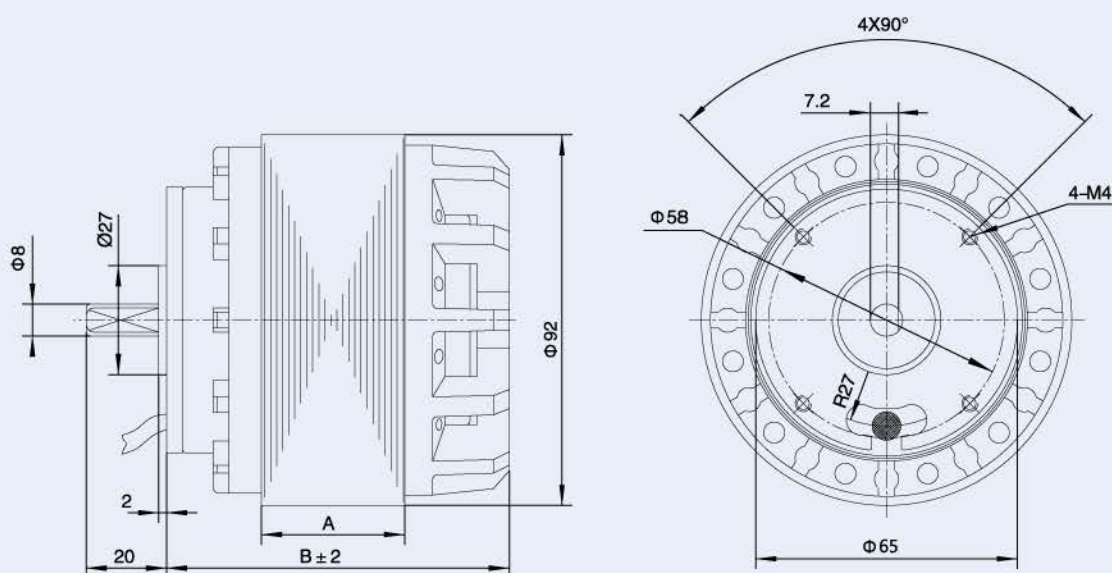

Type 型号	Rated voltage 额定电压 V	Frequency 频率 Hz	Current 额定电流 A	Input power 输入功率 W	Rated speed 额定转速 r/min	Capacitance 电容 μF	Net weight 净重 kg	Size 尺寸 mm	
								A	B
YWF2E-92/15B-K	220	50	0.26	55	2300	2	1.0	15	66
YWF4E-92/15B-K	220	50	0.21	40	1400	1.5	1.0	15	66
YWF2E-92/25B-K	220	50	0.40	80	2400	3	1.5	25	76
YWF4E-92/25B-K	220	50	0.23	50	1380	2	1.5	25	76
YWF2E-92/35B-K	220	50	0.66	145	2300	4	2.0	35	86
YWF4E-92/35B-K	220	50	0.45	95	1300	4	2.0	35	86
YWF2E-92/42B-K	220	50	0.95	215	2500	6	2.2	42	93
YWF4E-92/42B-K	220	50	0.60	130	1350	5	2.2	42	93
YWF2E-92/15B-K	120	60	0.65	75	2500	8	1.0	15	66
YWF4E-92/15B-K	120	60	0.31	40	1700	5	1.0	15	66
YWF2E-92/25B-K	120	60	0.95	120	2850	10	1.5	25	76
YWF4E-92/25B-K	120	60	0.55	65	1600	8	1.5	25	76
YWF2E-92/35B-K	120	60	1.76	210	2500	16	2.0	35	86
YWF4E-92/35B-K	120	60	0.85	95	1550	10	2.0	35	86
YWF2E-92/42B-K	120	60	2.0	235	2600	24	2.2	42	93
YWF4E-92/42B-K	120	60	1.20	140	1500	20	2.2	42	93

Torque(50Hz)

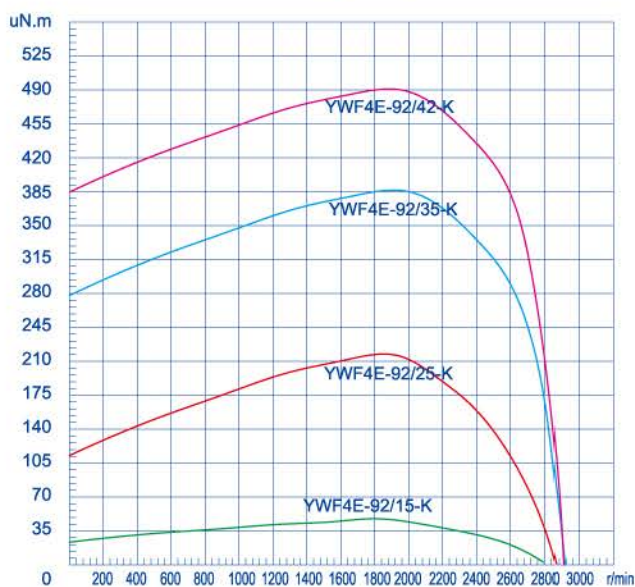

Torque(50Hz)

