



Description

Motor technology: AC

Rated voltage U_N : 3~ 400 V (Δ/Y) ± 10 %*

Rated frequency f_N : 50 Hz* (60Hz data available)

Motor input power P_1 : 0.42/0.30 kW*

Rated current I_N : 0.78/0.50 A*

Rated speed n_N : 900/ 710 min⁻¹*

Starting current I_A : 2.80 A / 0.90 A

Current increase ΔI : 10 %

Thermal class: THCL155*

Min. permitted conveyor temperature $t_{R(min)}$: -40 °C

Max. permitted conveyor temperature $t_{R(max)}$: 70 °C

Electrical connection: Terminal box

Number of blades: 4

Protection class: IP54

Motor protection: Thermal contact

Blades: Aluminium, uncoated

Rotor: Aluminium, uncoated

Conformity: ErP 2015, CE

ErP Data


Efficiency η_{statA} : 38.4 %

Efficiency: $N_{actual} = 47.3 / N_{target} = 40$ **

* Rated data

**ErP 2015

Characteristic curve

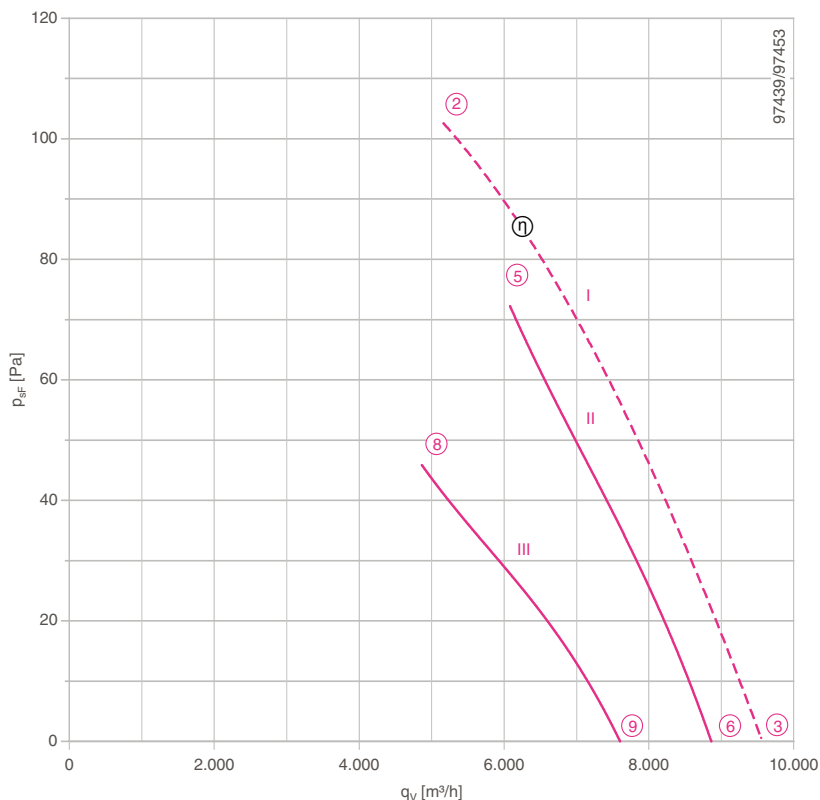

I) Measured in full bell mouth without guard grille in installation type A according to ISO 5801.

II-x) Measured in short-bell mouth with compressed side contact protection.


Connection diagram 1360-108XA Page 608

System components Page 524

Dimensions [mm]

Airflow direction V

Design K - axial bolted, mounted for short bell mouth E

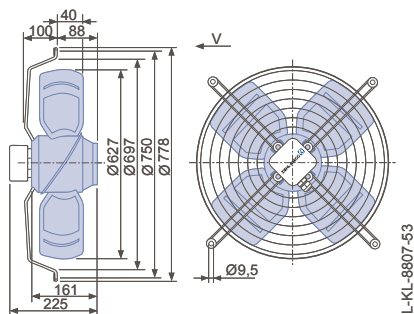

		curve	U [V]	point	I [A]	power P ₁ [W]	n [min ⁻¹]	sound power level L _{WA5} [dB]	
FB063-SD_4I.V4L	Δ	I	400*	②	0.78*	420*	900*	78	
			400	③	0.60	260	940	76	
		II	400	⑤	0.74	390	910	74	
			400	⑥	0.64	300	940	72	
	Y	III	400	⑧	0.48	290	730	70	
			400	⑨	0.39	230	800	68	

*rated data

Fan ordering information

Airflow direction V

Design

K



Type

FB063-SDK.4I.V4L

Article no.

124168

Weight [kg]

12.80

Control technology

Frequency inverter
Fcontrol 3~



Page 558

Motor protection units
3~



Page 596

Transformer-based
controllers 3~



Page 591

Electronic voltage
controllers 3~



Page 578