



Description

Motor technology: AC

Rated voltage U_N : 3~ 400 V (Δ/Y) ± 10 %*

Rated frequency f_N : 50 Hz*

Motor input power P_1 : 2.90/1.80 kW*

Rated current I_N : 5.30/3.00 A*

Rated speed n_N : 1290/ 990 min⁻¹*

Starting current I_A : 19.00 A / 6.00 A

Current increase ΔI : 0 %

Thermal class: THCL155*

Min. permitted conveyor temperature $t_{R(min)}$: -40 °C

Max. permitted conveyor temperature $t_{R(max)}$: 65 °C

Electrical connection: Terminal box

Number of blades: 7

Protection class: IP54

Motor protection: Thermal contact

Blades: Aluminium, 1 coat paint, black

Rotor: Aluminium, 1 coat paint, black

Conformity: ErP 2015, CE

ErP Data


Efficiency η_{statA} : 36.4 %

Efficiency: $N_{actual} = 40.0 / N_{target} = 40$ **

* Rated data

**ErP 2015

Characteristic curve

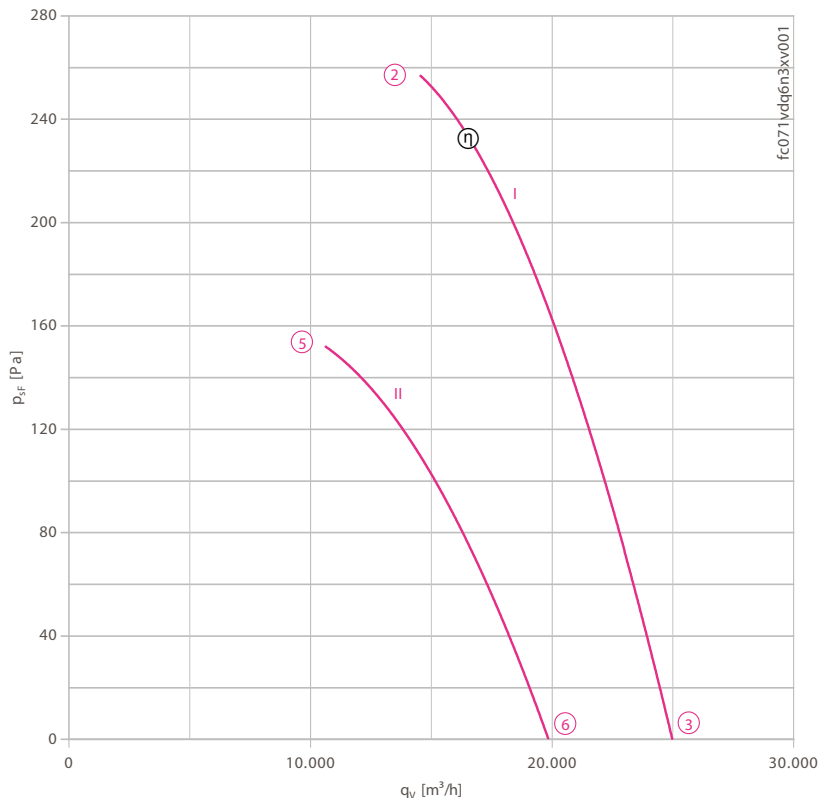

Measured in full bell mouth without guard grille in installation type A according to ISO 5801.


Connection diagram 1360-108XA Page 608

System components Page 524

Dimensions [mm]

Airflow direction V

Design Q - square, full bell mouth

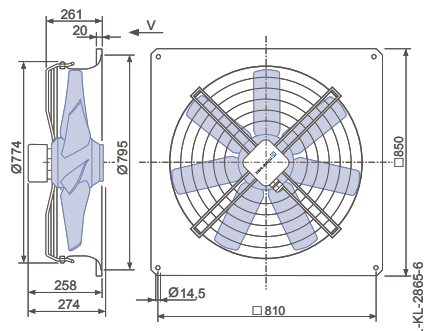


		curve	U [V]	point	I [A]	power P ₁ [W]	n [min ⁻¹]	sound power level L _{WA5} [dB]
FC071-VD_.6N.V7	Δ	I	400*	②	5.10*	2800*	1300*	90
			400	③	4.50	2400	1330	90
	Y	II	400*	⑤	3.00*	1800*	990*	83
			400	⑥	2.80	1600	1060	84

*rated data

Fan ordering information

Airflow direction V

Design Q



Type FC071-VDQ.6N.V7

Article no. 132521

Weight [kg] 41.20

Control technology

Frequency inverter
Fcontrol 3~



➤ Page 558

Motor protection units
3~



➤ Page 596

Transformer-based
controllers 3~



➤ Page 591

Electronic voltage
controllers 3~



➤ Page 578