

Plug fan C ATEX

ER35C

Motor ZAmotpremiumEX IE2




Description

Plug fan with high performance centrifugal impeller
Impeller made of bright sheet metal powder-coated according to resistance class 2 RAL 9005 (jet black)
Inlet nozzle with measuring device for air flow measurement
Fitting position H
Rated voltage U: 3~ 400 V
Rated frequency f: 50 Hz
Motor protection: PTC resistor
Degree of protection : IP55
Thermal class: THCL155
Min. permitted ambient temperature: -20 °C
Max. permitted ambient temperature: 40 °C
Temperature class: II 2 G c IIB T4
Conformity: EAC


Nozzle coefficients

Standard k	111
With guard grille k_g	106

Characteristic curve

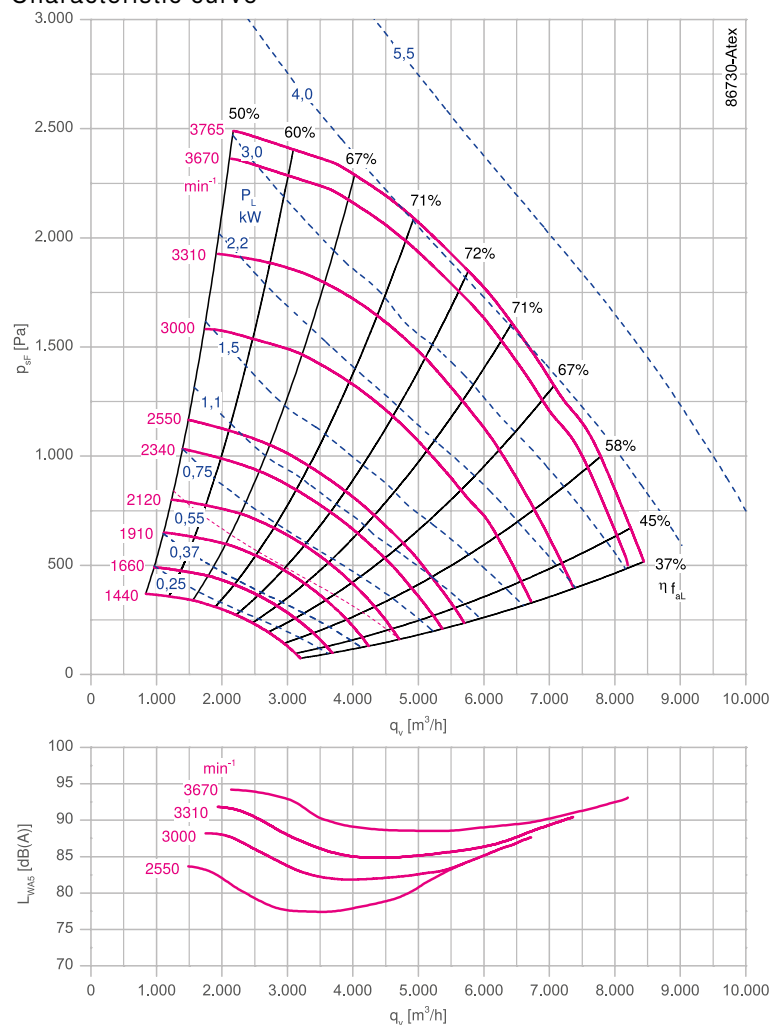

Dimensions mm

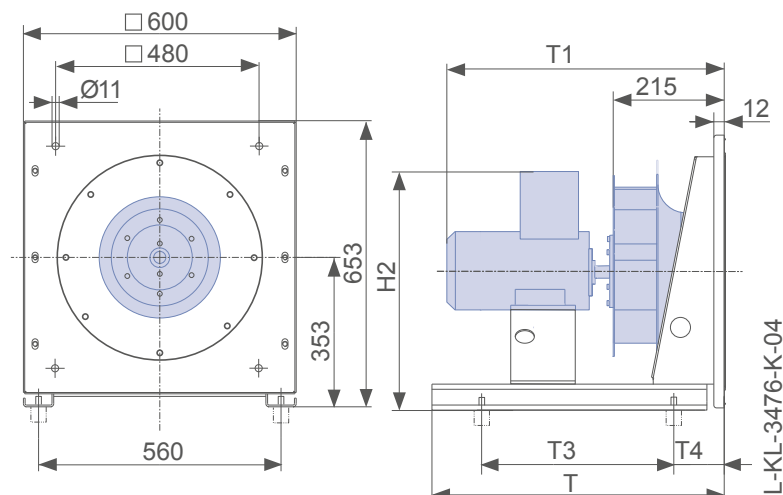

C-ATEX-ZAmotpremiumEX IE2								
Rated power P_N kW	Type	Article no.	Motor size	Motor efficiency η_{mot} %	Rated current I_N A	Rated speed n_N rpm	Maximum speed n_{max} rpm	Maximum frequency f_{max} Hz
1.5	ER35C-4DY.D7.1R	130595/EX01	090L	82.8	3.30	1435	2550	89
2.2	ER35C-2DY.D7.1R	130596/EX01	090L	83.2	4.50	2890	3000	52
3.00	ER35C-2DY.E7.1R	130597/EX01	100L	84.6	6.10	2905	3310	57
4.00	ER35C-2DY.F7.1R	130598/EX01	112M	85.8	7.80	2950	3670	63

P_N kW	Type	Weight kg	T mm	T1 mm	T3 mm	T4 mm	H2 mm	Flexible inlet connector	Guard grille	Vibration damper		Frequency inverters 3~
										Spring	Rubber	
1.5	ER35C-4DY.D7.1R	56.00	562	566	350	115	566	00406432	00412702	02021197	00090144	308230
2.2	ER35C-2DY.D7.1R	56.00	562	566	350	115	566	00406432	00412702	02021198	00090144	308232
3.00	ER35C-2DY.E7.1R	73.00	562	580	400	115	580	00406432	00412702	02021198	00090144	308234
4.00	ER35C-2DY.F7.1R	82.00	562	593	400	115	593	00406432	00412702	02021198	00090144	308236

Information

ZAbuefin

Cpro

C

C ATEX

Impellers with hub

System components

Control technology

General notes