

FE2owlet-ECQ

for single phase alternating current, 200-264 V


FN025



Description

Motor technology: EC
Rated voltage U: 1~ 200-264 V*
Rated frequency f: 50/60 Hz*
Motor input power P_{sys} : 0,032 kW*
Rated current I: 0,34- 0,26 A*
Rated speed n_{max} : 1750 Min⁻¹*
Thermal class: THCL130*
Min. permitted conveyor temperature $t_{\text{R(min)}}$: -40 °C
Max. permitted conveyor temperature $t_{\text{R(max)}}$: 50 °C
Electrical connection: Integrated controller with attached cable
Number of blades: 5
Protection class: IP55
Blades: High Performance Composite Material, uncoated, black
Conformity: CE, UL
ErP-data
Not subject to the regulations of ErP directive ($P_1 < 125 \text{ W}$)
* Rated data

Characteristic curve

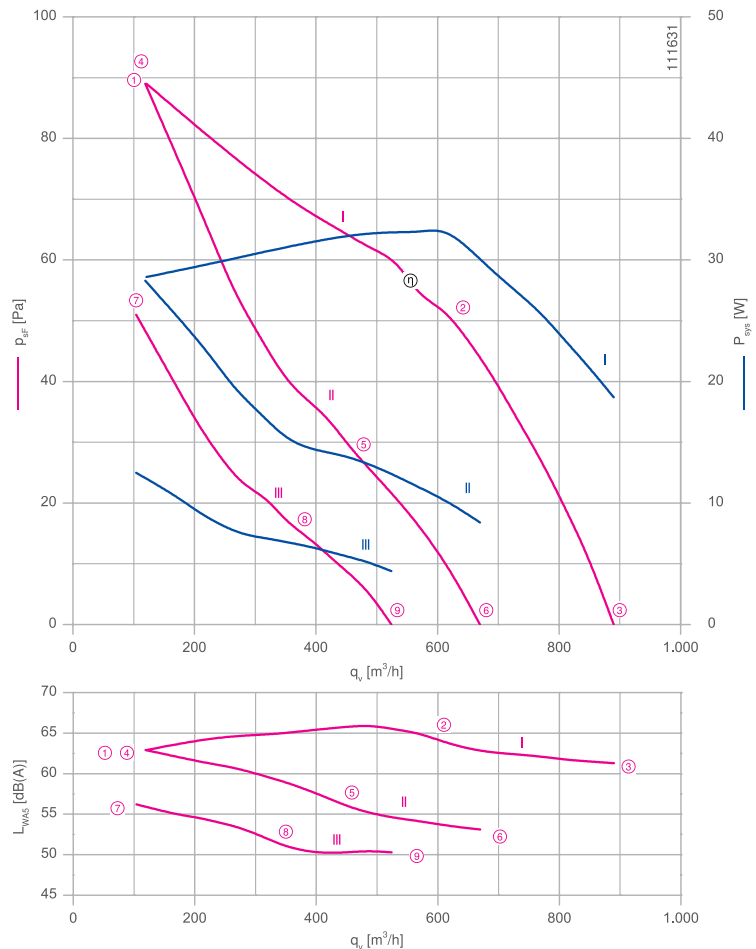

Measured with inlet ring, without guard grille in installation typet A according to ISO 5801


Connection diagram

Page 8
1360-334


Dimensions mm

Airflow direction V

Design A - without mounting

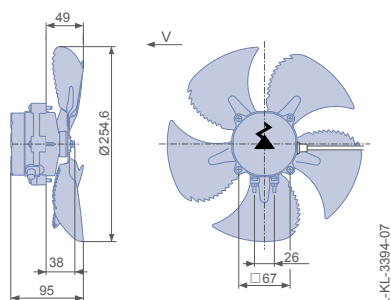

Design E - round short bell mouth, without guard grille

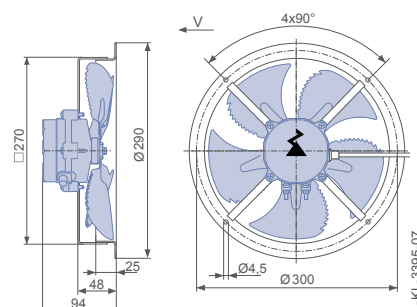

Performance data

Type	Characteristic curve	Speed	Operating point	Current	Motor input power	Suction side sound power level
		n min ⁻¹		I A	P _{sys} W	L _{WAS} dB(A)
FN025-4Q_UA.V5P3	I	1750	①	0.27	28	63
			②	0.29	32	64
			③	0.18	19	61
	II	1300	④	0.28	28	63
			⑤	0.15	14	56
			⑥	0.09	8	53
	III	1000	⑦	0.14	13	56
			⑧	0.08	7	51
			⑨	0.05	4	50

Current values determined at 230V

Intelligent motor electronics limit the power consumption in operating point ① and ② ,where the full nominal speed is not reached.

Fan ordering information

Airflow direction V		
Design	A	E (without guard grille)
		
Type	FN025-4QA.UA.V5P3	FN025-4QE.UA.V5P3
Article no.	167995	151826
Weight kg	0.71	1.05

Control technology

Motor Programmer



Page 50

FE2owlet-ECQ

for single phase alternating current, 200-264 V


FN025



Description

Motor technology: EC
Rated voltage U: 1~ 200-264 V*
Rated frequency f: 50/60 Hz*
Motor input power P_{sys} : 0,032 kW*
Rated current I: 0,31- 0,27 A*
Rated speed n_{max} : 1950 Min⁻¹*
Thermal class: THCL130*
Min. permitted conveyor temperature $t_{\text{R(min)}}$: -40 °C
Max. permitted conveyor temperature $t_{\text{R(max)}}$: 50 °C
Electrical connection: Integrated controller with attached cable
Number of blades: 5
Protection class: IP55
Blades: High Performance Composite Material, uncoated, black
Conformity: CE, UL
ErP-data
Not subject to the regulations of ErP directive ($P_1 < 125 \text{ W}$)
* Rated data

Characteristic curve

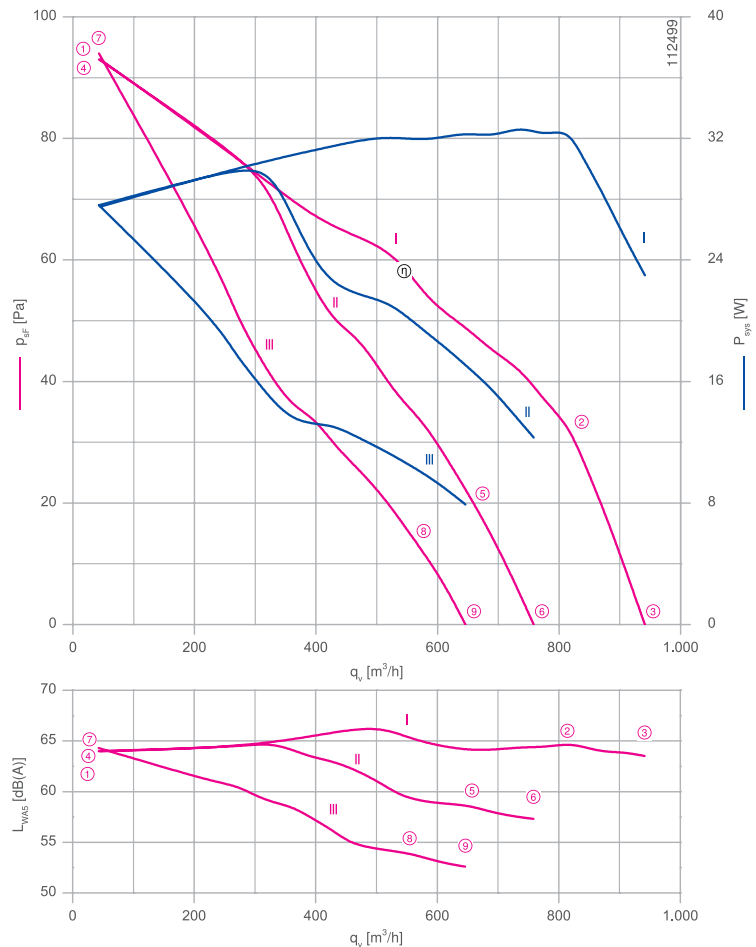

Measured with inlet ring, without guard grille in installation typet A according to ISO 5801


Connection diagram

Page 8
1360-334


Dimensions mm

Airflow direction V

Design A - without mounting

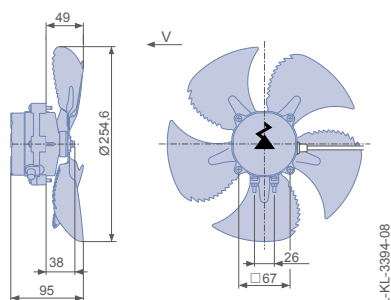

Design E - round short bell mouth, without guard grille

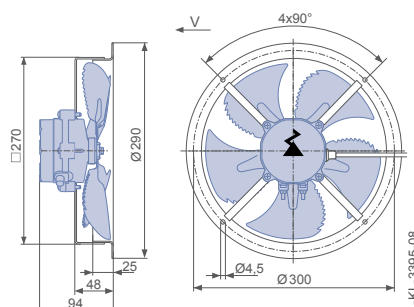

Performance data

Type	Characteristic curve	Speed	Operating point	Current	Motor input power	Suction side sound power level
		n min ⁻¹		I A	P _{sys} W	L _{WAS} dB(A)
FN025-4Q_UA.V5P3	I	1950	①	0.27	28	64
			②	0.31	32	65
			③	0.24	24	64
	II	1550	④	0.27	28	64
			⑤	0.18	17	59
			⑥	0.14	12	57
	III	1300	⑦	0.26	28	64
			⑧	0.12	11	54
			⑨	0.09	8	53

Current values determined at 230V

Intelligent motor electronics limit the power consumption in operating point ① and ② ,where the full nominal speed is not reached.

Fan ordering information

Airflow direction V		
Design	A	E (without guard grille)
		
Type	FN025-4QA.UA.V5P3	FN025-4QE.UA.V5P3
Article no.	167996	151827
Weight kg	0.71	1.05

Control technology

Motor Programmer



Page 50