

FE2owlet


FN080-SD_.6N.V7

Leistungsdaten Performance data

3~ 400V ±10% Δ/Y 50Hz


P_1	1,8/1,15	kW
I	3,80/2,20	A
n	890/690	min ⁻¹
I_A	11/3,7	A
Δt	5	%
t_R	65	°C

Kennliniendaten Characteristic data

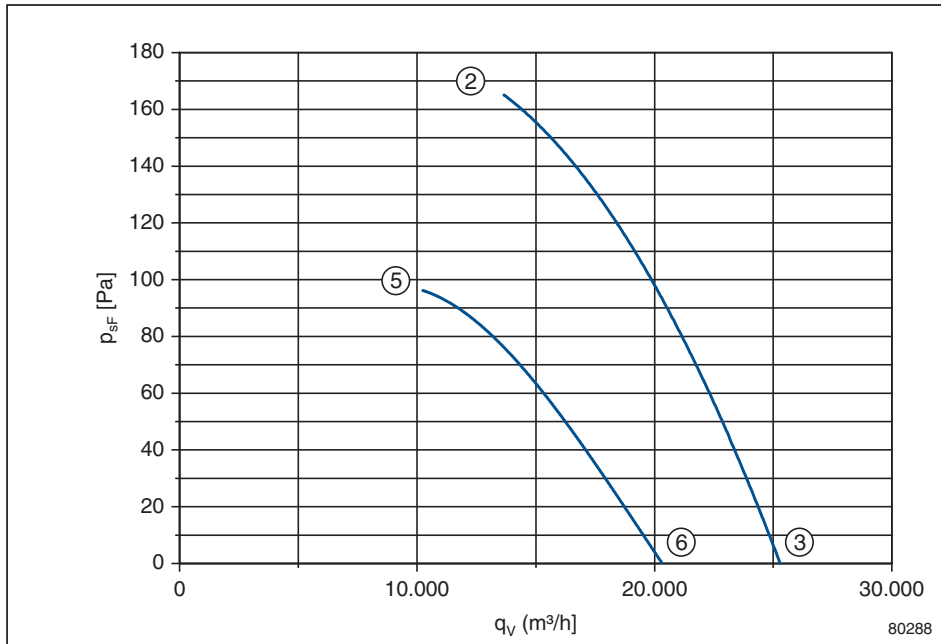

	U V	I A	P ₁ W	n min ⁻¹
②	400	3,80	1800	890
③	Δ	3,60	1530	920
⑤	400	2,20	1150	690
⑥	Y	2,00	1050	740

$$p_{d2} = 1,86 \cdot 10^{-7} \cdot q_v^2$$

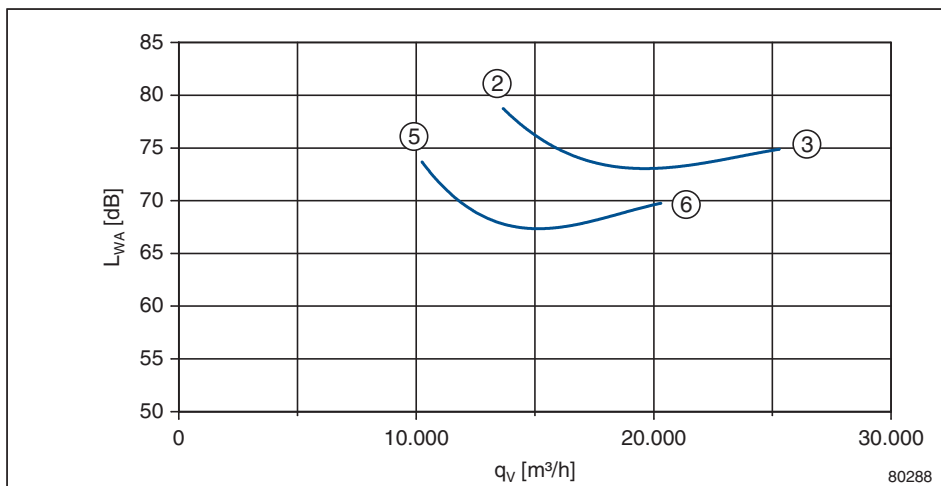

gemessen in Volldüse ohne Berührschutz in Einbauart A nach ISO 5801
measured in full bell mouth without guard grille in installation type A according to ISO 5801

Maßblatt / Dimension sheet

Typ Type	Artikel-Nr. Article no.	Bauform Design	Luftförderrichtung Airflow direction	Gewicht Weight	Anschlusschaltbild Connection diagram	Maßblatt Dimension sheet	Seite Page
FN080-SDA.6N.V7	138 298	A	V	29 kg	108XA	L-KL-2600	88
FN080-SDS.6N.V7	138 756	S (M)*	V	36 kg	108XA	L-KL-2601	89
FN080-SDS.6N.V7	138 757	S (R)*	V	37 kg	108XA	L-KL-2601	89
FN080-SDQ.6N.V7	138 292	Q (M)*	V	51 kg	108XA	L-KL-2602	90
FN080-SDQ.6N.V7	138 758	Q (R)*	V	51 kg	108XA	L-KL-2602	90

* (M) Maschinengitter / mesh grille (R) Ringgitter / ring grille