

L-series

for single phase alternating current, 2 pole

RH19L-2E



Description


Motor technology: AC
Rated voltage U_N : 1~ 230 V*
Rated frequency f_N : 50 Hz* (60Hz data available)
Motor input power P_1 : 0.07 kW*
Rated current I_N : 0.29 A*
Rated speed n_N : 2400 min⁻¹*
Current increase ΔI : 0 %
Service capacitor C_{400V} : 2.0 μ F
Thermal class: THCL130*
Min. permitted ambient temperature $t_{R(min)}$: -30 °C
Max. permitted ambient temperature $t_{R(max)}$: 70 °C
Motor protection: Thermal contact
Impeller : High Performance Composite Material, uncoated
Conformity: CE

ErP-data

Not subject to ErP regulations ($P_1 < 125$ W)

* Rated data

Characteristic curve

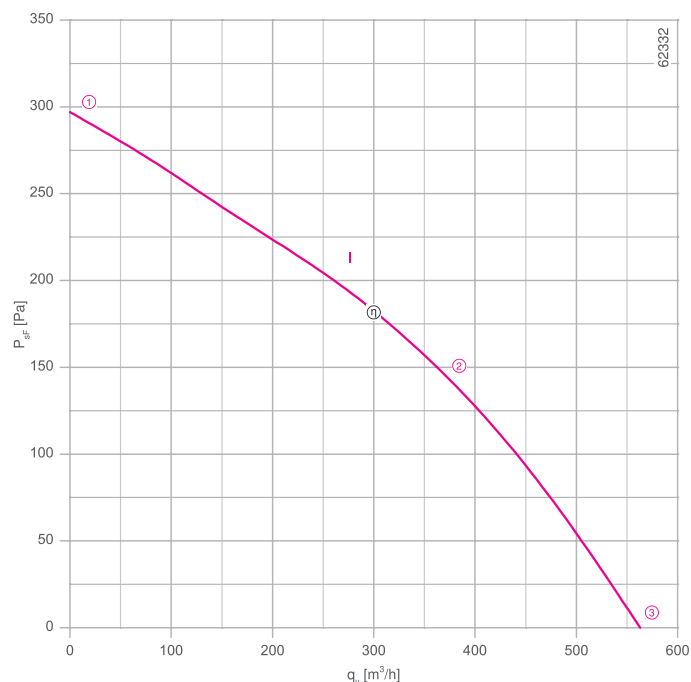


measured with inlet ring, without guard grille according to ISO 5801

➤ Inlet ring	00407897	Page 451
➤ Connection diagram	1360-177X SW	Page 550
➤ System components		Page 448

Dimensions [mm]

Free-running motor impeller RH
in installation position H/Vu/Vo

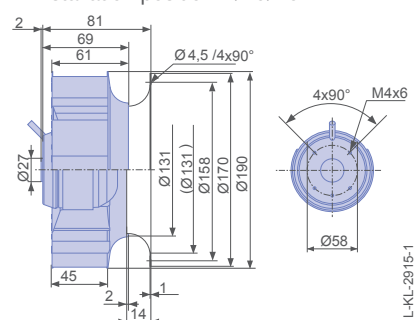


Performance data

Type	Characteristic curve	Voltage	Operating point	Current	Motor input power	Speed	Suction side sound power level
		U [V]		I [A]	P ₁ [W]	n [min ⁻¹]	L _{WA5} [dB]
RH19L-2EP.W6.1R	I	230	①	0.20	46	2810	
		230*	②	0.29*	65*	2400*	66
		230	③	0.26	60	2530	70

*rated data

Fan ordering information

Design	RH*
Installation position	H/Vu/Vo
Electrical connection	Supply cable variable 45cm
	
Type	RH19L-2EP.W6.1R
Article no.	113035
Weight [kg]	1.40
* Inlet ring not included	

Control technology

Frequency inverter Fcontrol 1~  ➤ Page 478	Motor protection units 1~  ➤ Page 526	Transformer-based controllers 1~  ➤ Page 517	Electronic voltage controllers 1~  ➤ Page 492
--	---	--	--

