

RH..C-ECblue

RH25C-6ID.BF.1R

Leistungsdaten Performance data


1~ 200...277V
50/60Hz IP54

Anschlussplan KT00044A
Connection diagram

P_1	0,49	kW
I_1	2,6-1,85	A
n	3060	min ⁻¹
t_R	40	°C

Kennliniendaten / Characteristic data


gemessen mit Volldüse / measured with full bell mouth

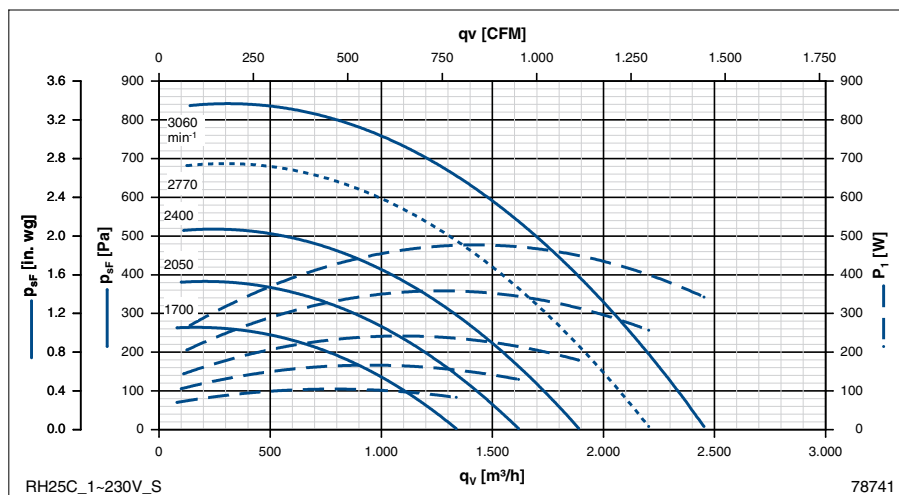


Artikel-Nr.
Article no.

Volldüse / Full bell mouth	00401504
----------------------------	----------

----- Drehzahl für
Operating speed for
 $t_R = 60\text{ °C}$

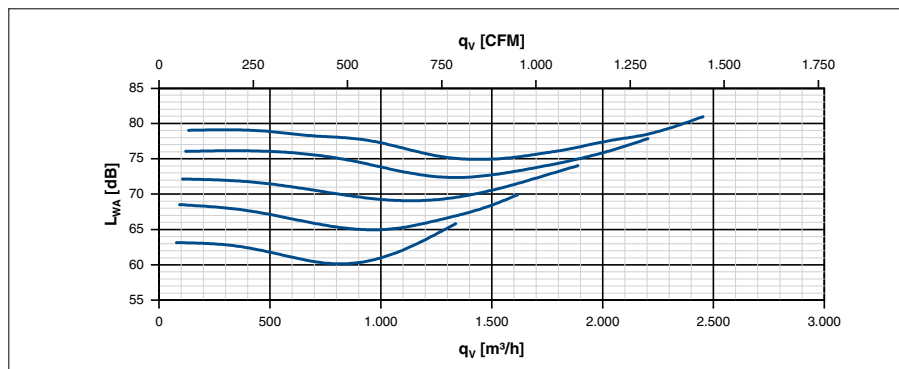

Abmessungen / Dimensions

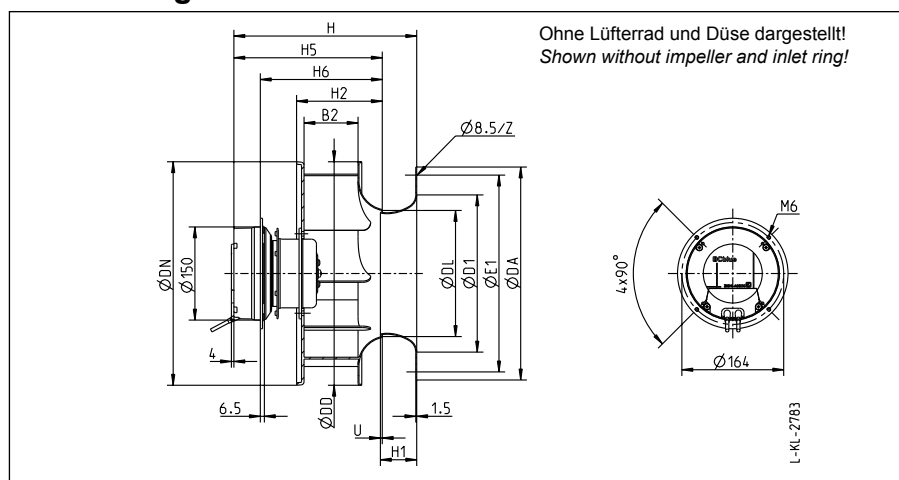

Einbaulagen Installation positions

Motorwelle horizontal
Horizontal motor shaft
H

Motorwelle vertikal
Vertical motor shaft


Vo Laufrad von oben ansaugend
Impeller at the top

Vu Laufrad von unten ansaugend
Impeller at the bottom

Ventilator-Typ Fan type	Artikel-Nr. Article no.	Controller	kg	B2	DA	DD	DL	DN	D1_	E1	H	H1	H2	H5	H6	U
RH25C-6ID.BF.1R	113841	Basic	6	70	277	290	163	290	202	257	257	47	108	213	170	2,5

ER25C-6ID.BF.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

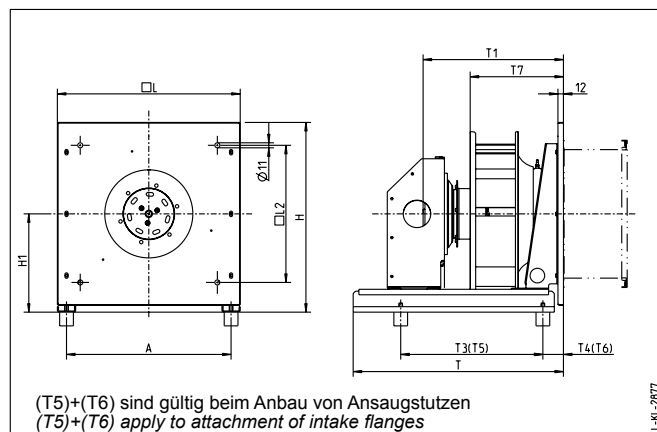


L-KL-2877

Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	L	L2	T	T1	T3	T4	T5	T6	T7
ER25C-6ID.BF.1R	113 844/A01	14	360	415	215	400	288	460	272	272	45	237	45	162

GR25C-6ID.BF.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

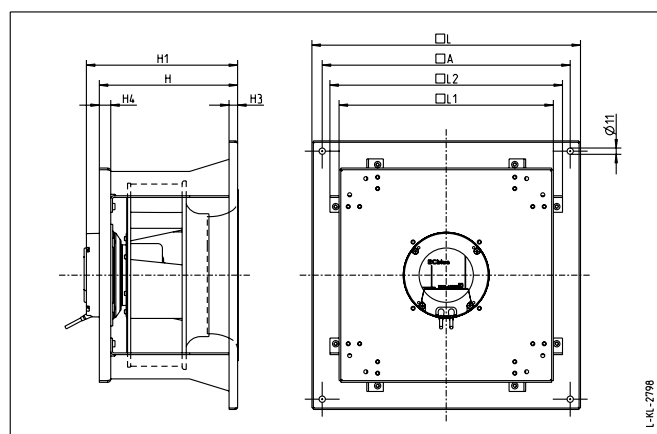

L-KL-2798


Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	H3	H4	L	L1	L2
GR25C-6ID.BF.1R	113 847/H01	12	367	229	256	10	16	400	312	339

GR25C-6ID.BF.1R

Einbaulage Motorwelle vertikal
Installation position vertical motor shaft

Lauftrad von oben ansaugend
Impeller at the top
Vo

Lauftrad von unten ansaugend
Impeller at the bottom
Vu

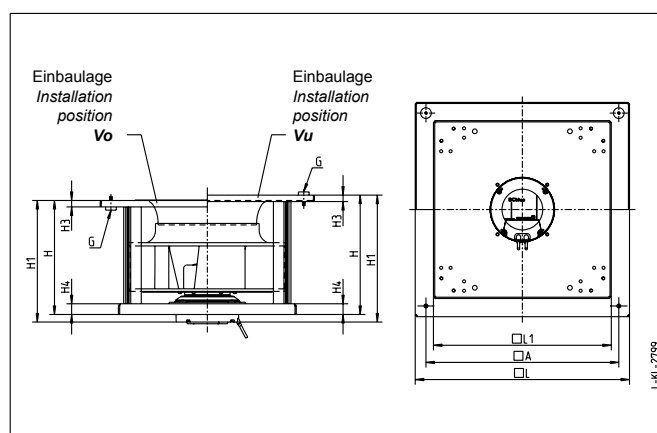

L-KL-2799

Ventilator-Typ Fan type	Artikel-Nr. Article no.			A	G_	H	H1	H3	H4	L	L1
GR25C-6ID.BF.1R	113 847/O01	Vo	11	340	M6	229	256	10	16	375	312
GR25C-6ID.BF.1R	113 847/U01	Vu	11	340	M6	237	264	10	16	375	312

RH..C-ECblue

RH28C-6ID.BF.1R

Leistungsdaten Performance data


1~ 200...277V
50/60Hz IP54

Anschlussplan KT00044A
Connection diagram

P_1	0,5	kW
I	2,7-1,95	A
n	2600	min ⁻¹
t_R	40	°C

Kennliniendaten / Characteristic data


gemessen mit Volldüse / measured with full bell mouth

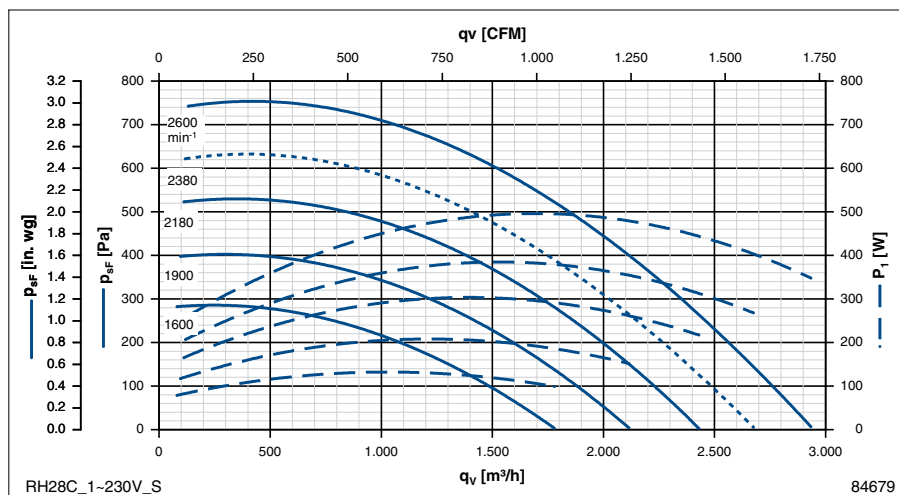


Artikel-Nr.
Article no.

Volldüse / Full bell mouth	00401505
----------------------------	----------

..... Drehzahl für
Operating speed for
 $t_R = 60\text{ °C}$

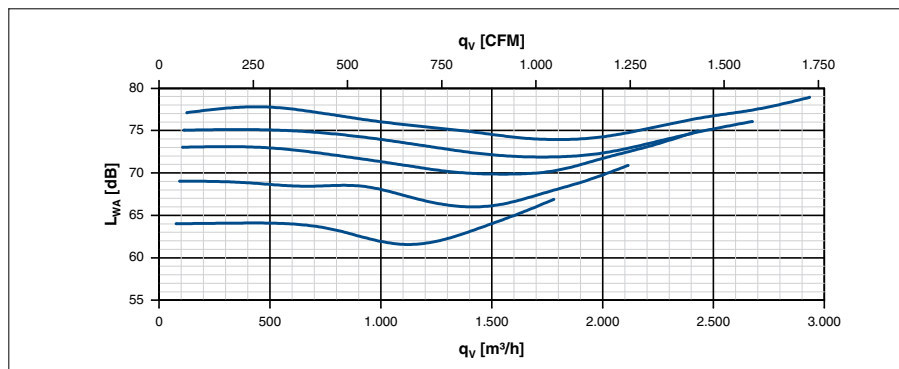

Abmessungen / Dimensions

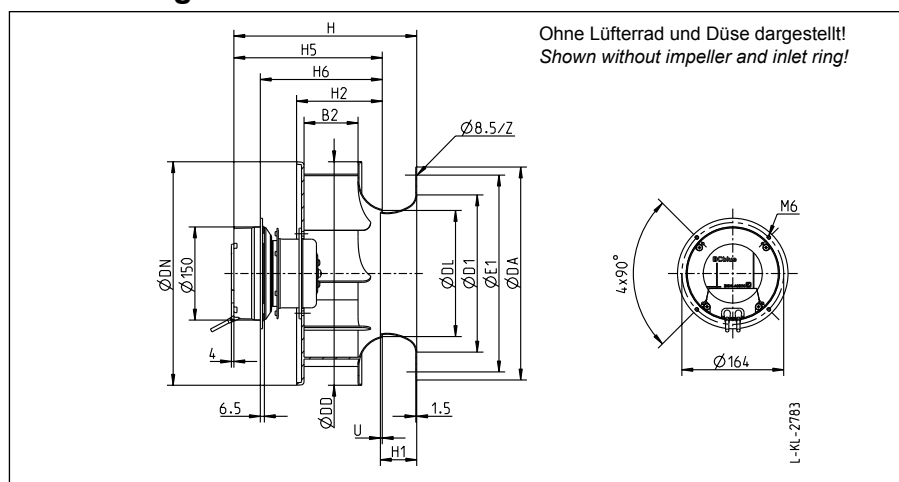

Einbaulagen Installation positions

Motorwelle horizontal
Horizontal motor shaft
H


Motorwelle vertikal
Vertical motor shaft

Vo Laufrad von oben ansaugend
Impeller at the top
Vu Laufrad von unten ansaugend
Impeller at the bottom

Ventilator-Typ Fan type	Artikel-Nr. Article no.	Controller	kg	B2	DA	DD	DL	DN	D1_	E1	H	H1	H2	H5	H6	U
RH28C-6ID.BF.1R	113842	Basic	6	78	303	322	181	322	225	283	273	52	119	224	181	3,0

ER28C-6ID.BF.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

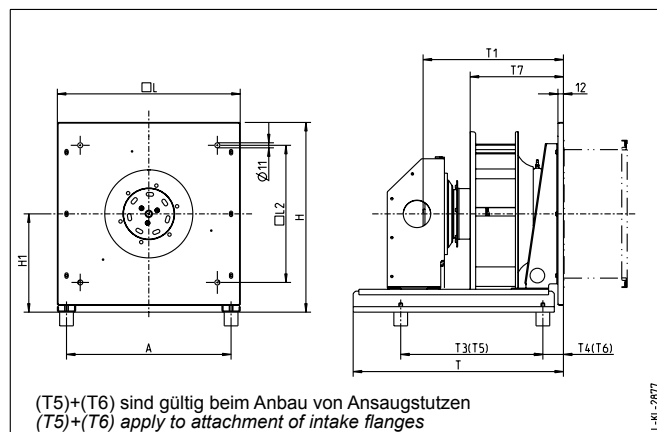


L-KL-2877

Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	L	L2	T	T1	T3	T4	T5	T6	T7
ER28C-6ID.BF.1R	113 845/A01	15	360	415	215	400	300	460	288	289	45	231	53	179

GR28C-6ID.BF.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

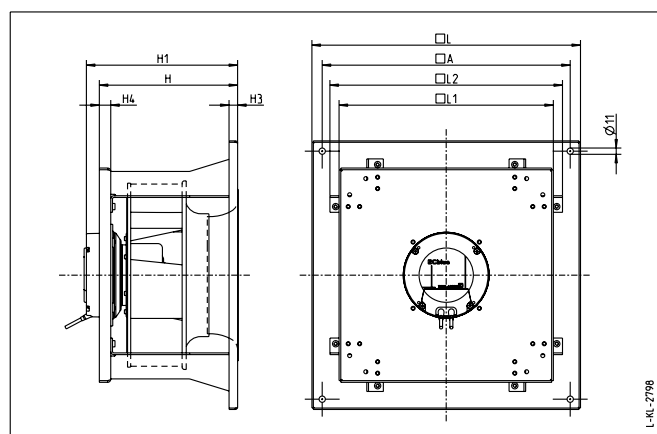

L-KL-2798


Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	H3	H4	L	L1	L2
GR28C-6ID.BF.1R	113 848/H01	14	390	249	272	10	20	420	345	367

GR28C-6ID.BF.1R

Einbaulage Motorwelle vertikal
Installation position vertical motor shaft

Lauftrad von oben ansaugend
Impeller at the top
Vo

Lauftrad von unten ansaugend
Impeller at the bottom
Vu

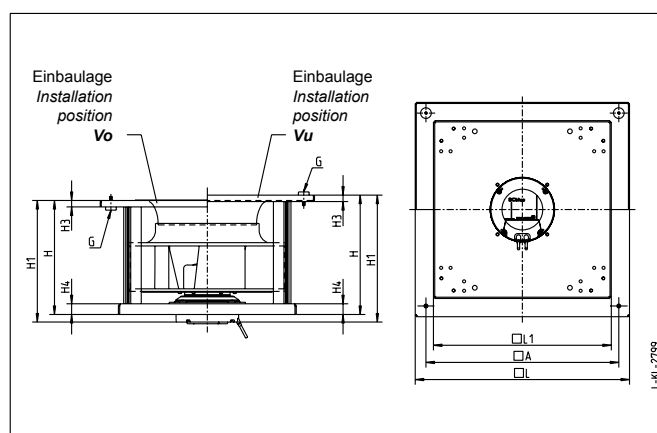

L-KL-2799

Ventilator-Type Fan type	Artikel-Nr. Article no.			A	G ₋	H	H1	H3	H4	L	L1
GR28C-6ID.BF.1R	113 848/O01	Vo	13	370	M6	249	272	10	20	405	345
GR28C-6ID.BF.1R	113 848/U01	Vu	13	370	M6	257	279	10	20	405	345