

RH28V-6IK.BF.1R


1~ 200...277V
50/60Hz IP54

P ₁	0,32	kW
I	1,7-1,2	A
n	2270	min ⁻¹
t _B	60	°C


Anschlussplan KT00044A

Connection diagram

gemessen mit Volldüse / *measured with full bell mouth*

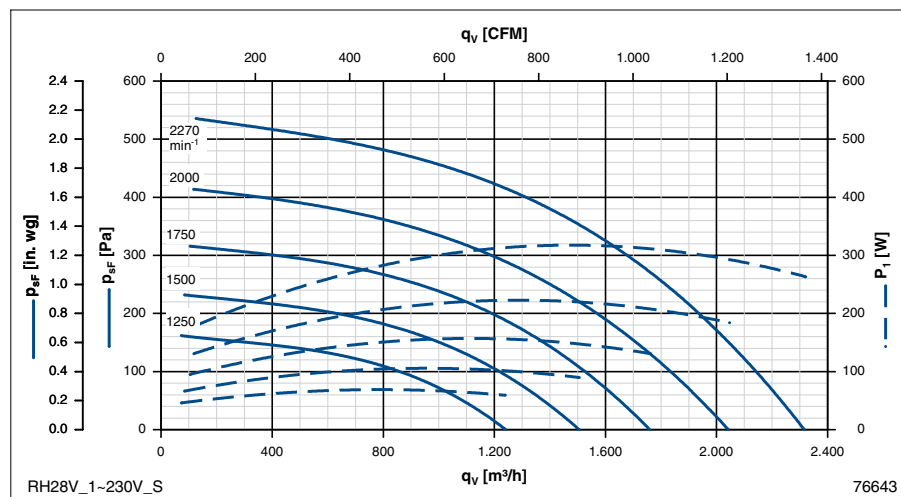

Volldüse / <i>Full bell mouth</i>	00275848
-----------------------------------	----------

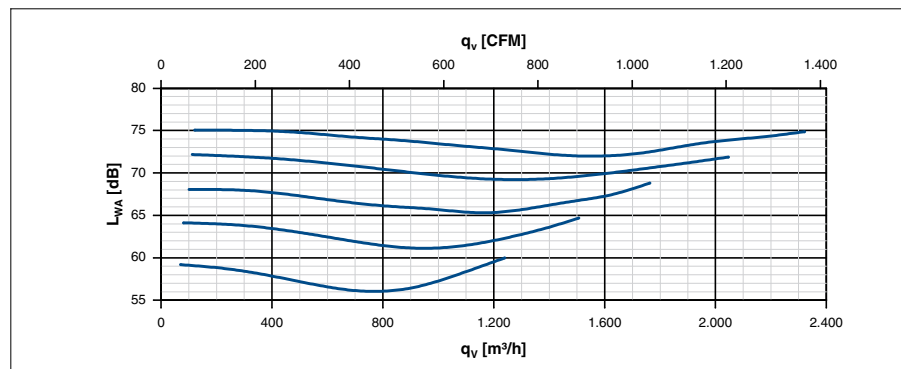

Ohne Lüfterrad und Düse dargestellt!
Shown without impeller and inlet ring!


Vo Laufrad von oben ansaugend
Impeller at the top

Vu Laufrad von unten ansaugend
Impeller at the bottom

Ventilator-Typ <i>Fan type</i>	Artikel-Nr. <i>Article no.</i>	Controller		B2	DA	DD	DL	DN	D1_	D5_	E1	H	H1	H2	H5	H6	U
RH28V-6IK.BF.1R	113853	Basic	6	80	265	292	188	287	235	7,0	250	239	43	128	199	156	3,0

GR28V-6IK.BF.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

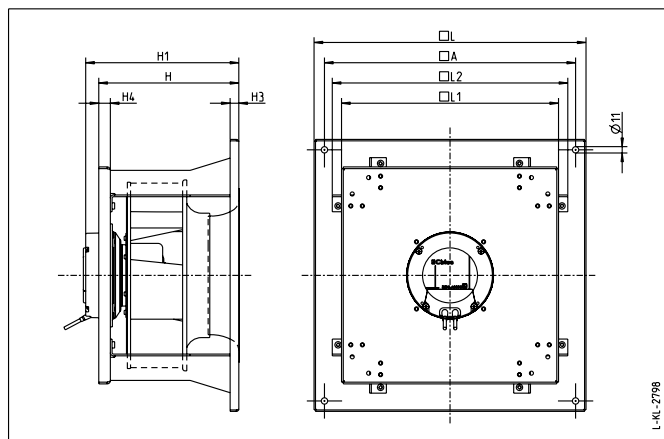

L-KL-2798


Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	H3	H4	L	L1	L2
GR28V-6IK.BF.1R	114 131/H01	13	390	215	238	10	20	420	345	367

GR28V-6IK.BF.1R

Einbaulage Motorwelle vertikal
Installation position vertical motor shaft

Lauftrad von oben ansaugend
Impeller at the top
Vo

Lauftrad von unten ansaugend
Impeller at the bottom
Vu

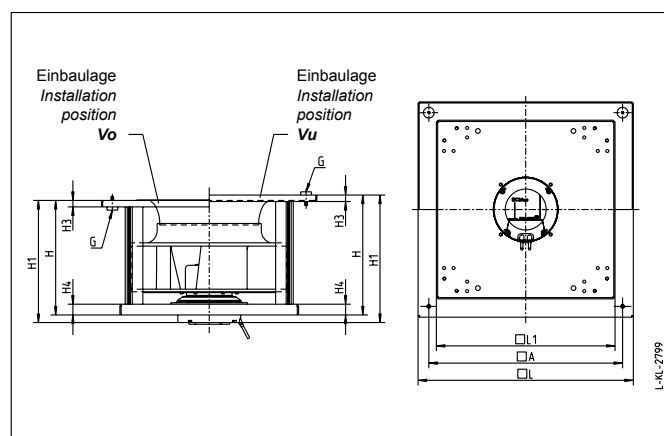

L-KL-2799

Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	G_	H	H1	H3	H4	L	L1
GR28V-6IK.BF.1R	114 131/O01	Vo	12	370	M6	215	238	10	20	405
GR28V-6IK.BF.1R	114 131/U01	Vu	12	370	M6	223	245	10	20	405