

RH..C-ECblue

RH35C-ZID.DC.1R

Leistungsdaten Performance data


1 ~ 200...277V
50/60Hz IP54

Anschlussplan MOEA03K0
Connection diagram

P_1	1,3	kW
I	6,4-4,6	A
n	2390	min ⁻¹
t_R	40	°C

Kennliniendaten / Characteristic data


gemessen mit Volldüse / measured with full bell mouth

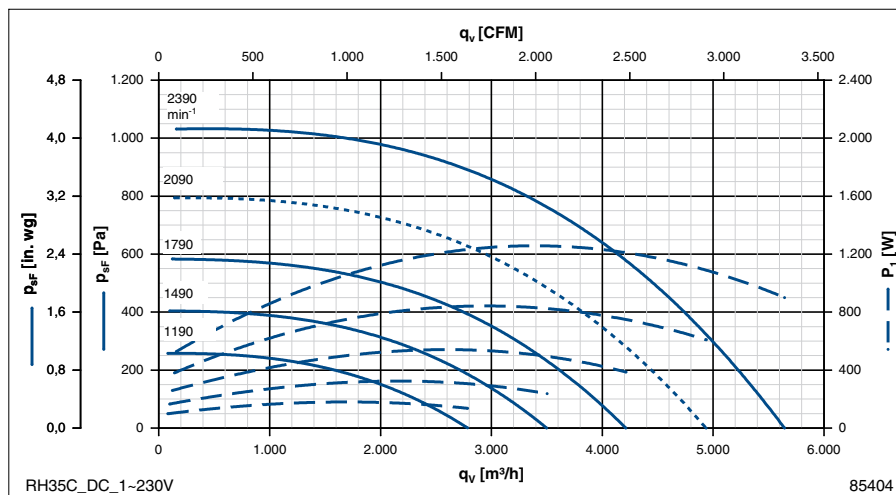


Artikel-Nr.
Article no.

Volldüse / Full bell mouth	00401296
----------------------------	----------

..... Drehzahl für
Operating speed for
 $t_R = 60\text{ °C}$

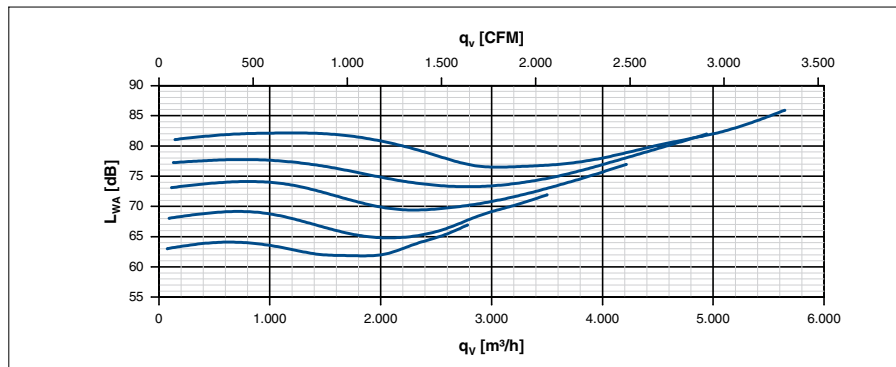

Abmessungen / Dimensions

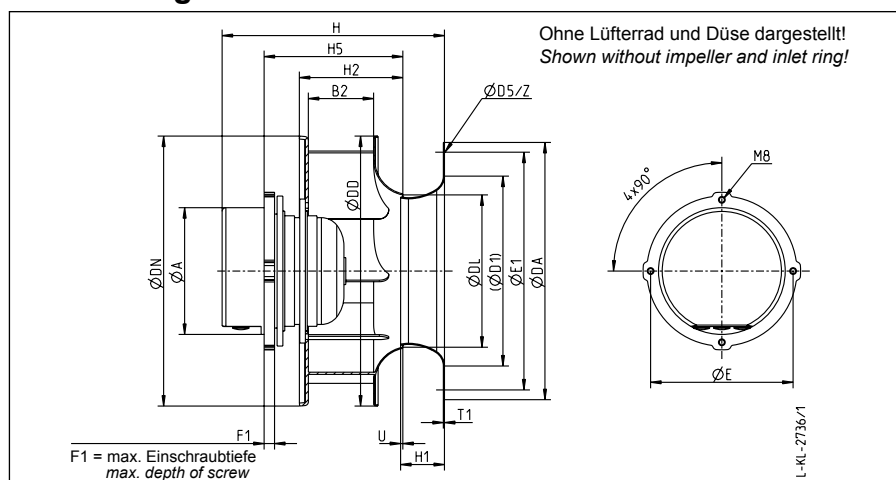

Einbaulagen Installation positions


Motorwelle horizontal
Horizontal motor shaft
H

Motorwelle vertikal
Vertical motor shaft
Vo Laufrad von oben ansaugend
Impeller at the top
Vu Laufrad von unten ansaugend
Impeller at the bottom

Ventilator-Typ Fan type	Artikel-Nr. Article no.	Controller	kg	A	B2	DA	DD	DL	DN	D1	D5	E	E1	F1	H	H1	H2	H5	T1	U	Z
RH35C-ZID.DC.1R	113 486 113 515	Basic Premium	10	169	98	378	406	228	406	286	8,5	190	352	14	318	66	150	200	1,5	3,5	4x90°

ER35C-ZID.DC.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

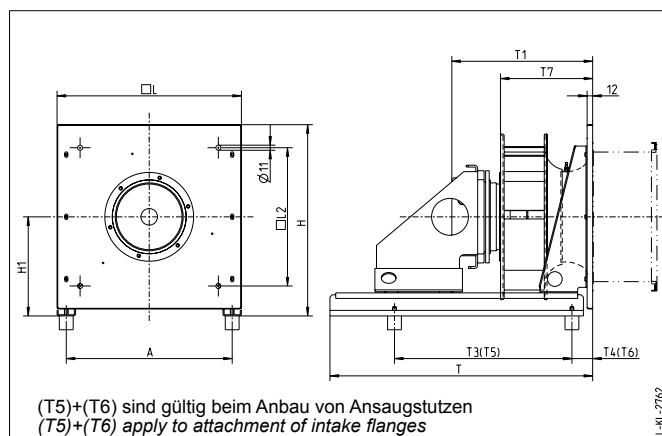


L-KL-2762

Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	L	L2	T	T1	T3	T4	T5	T6	T7
ER35C-ZID.DC.1R	113 710/A01	25	460	520	270	500	385	570	328	388	45	336	54	223

GR35C-ZID.DC.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

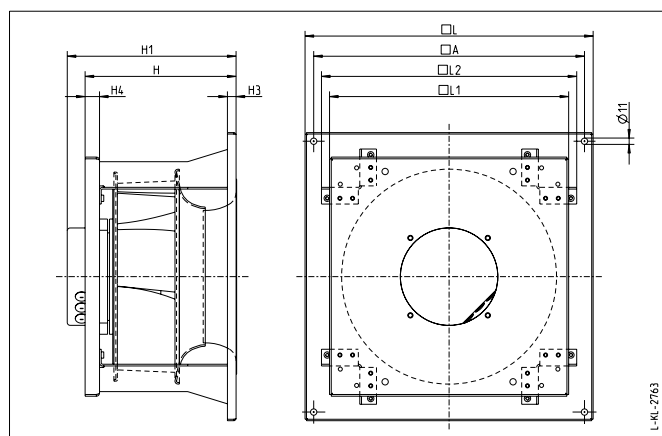

L-KL-2763


Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	H3	H4	L	L1	L2
GR35C-ZID.DC.1R	113 680/H01	22	470	285	316	15	25	500	415	443

GR35C-ZID.DC.1R

Einbaulage Motorwelle vertikal
Installation position vertical motor shaft

Lauftrad von oben ansaugend
Impeller at the top
Vo

Lauftrad von unten ansaugend
Impeller at the bottom
Vu

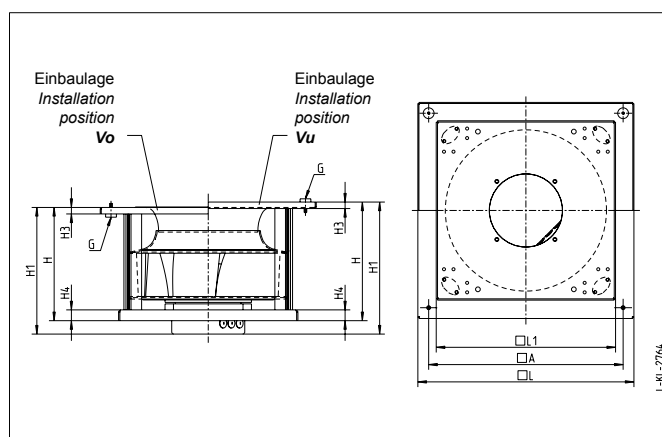

L-KL-2764

Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	G ₁	H	H1	H3	H4	L	L1
GR35C-ZID.DC.1R	113 680/O01	Vo	20	450	M6	285	316	15	25	500
GR35C-ZID.DC.1R	113 680/U01	Vu	20	450	M6	298	329	15	25	500

RH35C-ZID.DC.1 R

**3~ 200...240V
50/60Hz IP54**


P_1	1,9	kW
I_n	5,9-4,9	A
t_B	2770	min ⁻¹
	60	°C

gemessen mit Volldüse / *measured with full bell mouth*



Volldüse / *Full bell mouth*

00401296



Motorwelle vertikal
Vertical motor shaft


Vo Laufrad von oben ansaugend
Impeller at the top

Vu Laufrad von unten ansaugend
Impeller at the bottom

28 RH..C-ECblue, Vpro-ECblue

ER35C-ZID.DC.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

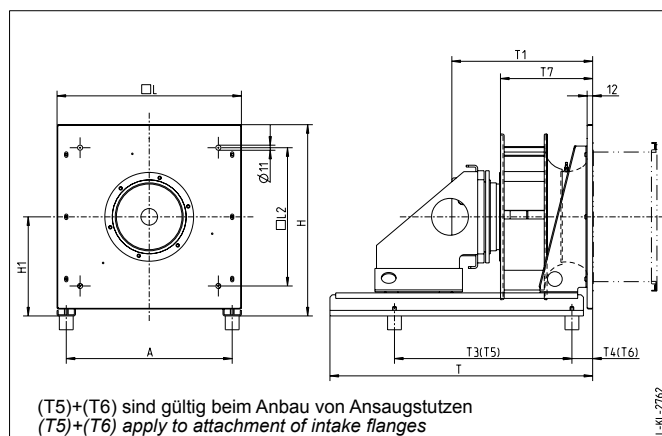


L-KL-2762

Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	L	L2	T	T1	T3	T4	T5	T6	T7
ER35C-ZID.DC.1R	113 708/A01	25	460	520	270	500	385	570	328	388	45	336	54	223

GR35C-ZID.DC.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

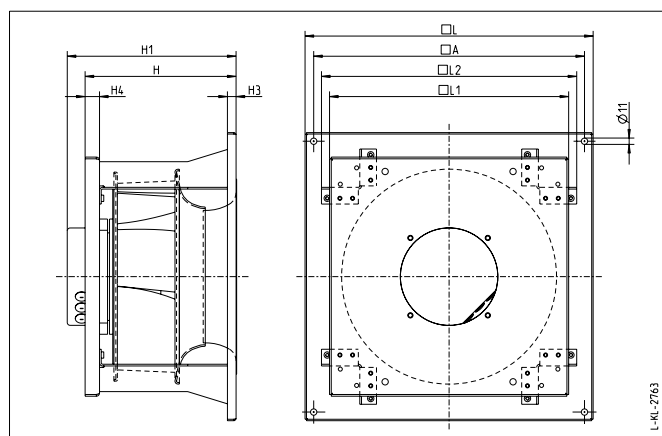

L-KL-2763


Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	H3	H4	L	L1	L2
GR35C-ZID.DC.1R	113 678/H01	22	470	285	316	15	25	500	415	443

GR35C-ZID.DC.1R

Einbaulage Motorwelle vertikal
Installation position vertical motor shaft

Lauftrad von oben ansaugend
Impeller at the top
Vo

Lauftrad von unten ansaugend
Impeller at the bottom
Vu

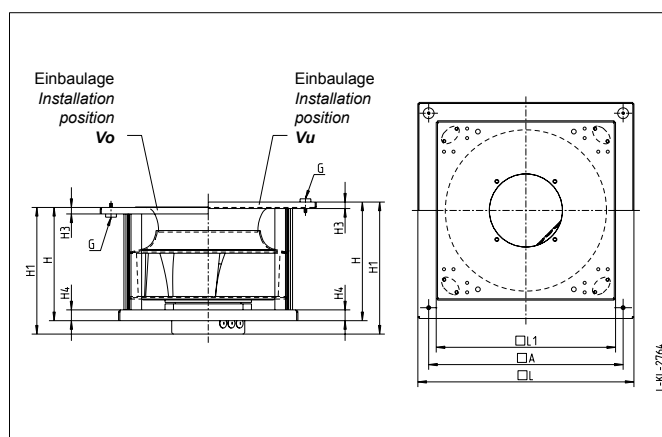

L-KL-2764

Ventilator-Type Fan type	Artikel-Nr. Article no.			A	G_	H	H1	H3	H4	L	L1
GR35C-ZID.DC.1R	113 678/O01	Vo	20	450	M6	285	316	15	25	500	415
GR35C-ZID.DC.1R	113 678/U01	Vu	20	450	M6	298	329	15	25	500	415

RH..C-ECblue

RH35C-ZID.DC.1R

Leistungsdaten Performance data


3~ 380...480V
50/60Hz IP54

Anschlussplan MOEA03K0
Connection diagram

P_1	2,5	kW
I	4,0-3,2	A
n	3000	min ⁻¹
t_R	50	°C

Kennliniendaten / Characteristic data


gemessen mit Volldüse / measured with full bell mouth

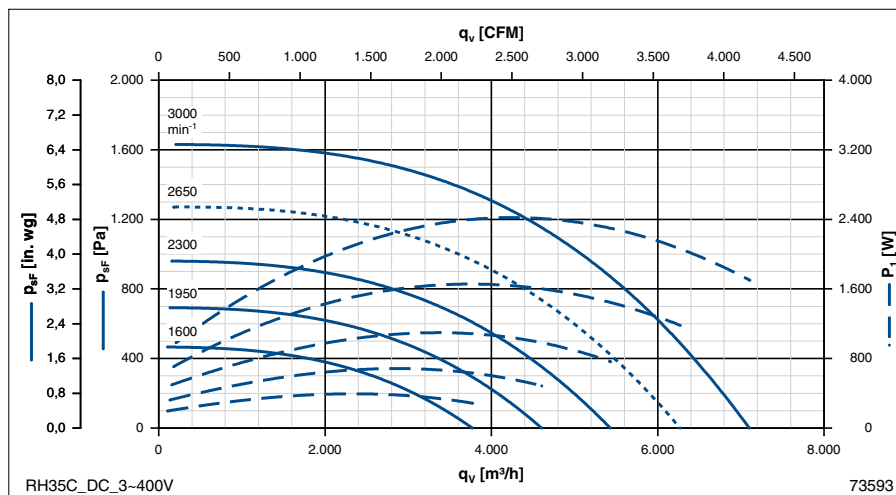


Artikel-Nr.
Article no.

Volldüse / Full bell mouth	00401296
----------------------------	----------

..... Drehzahl für
Operating speed for
 $t_R = 60\text{ °C}$

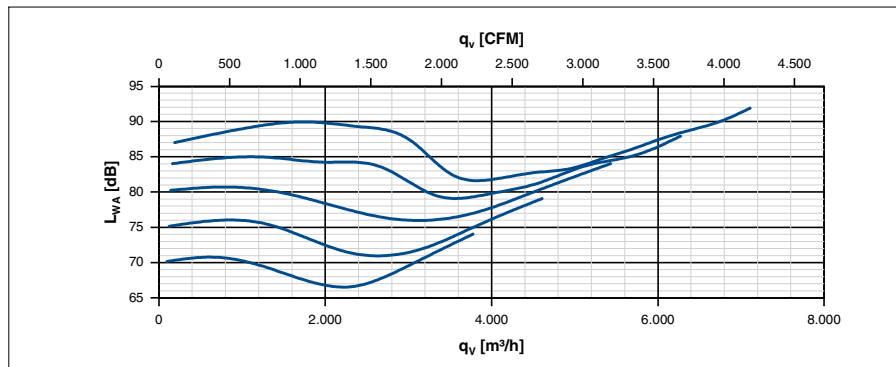

Abmessungen / Dimensions

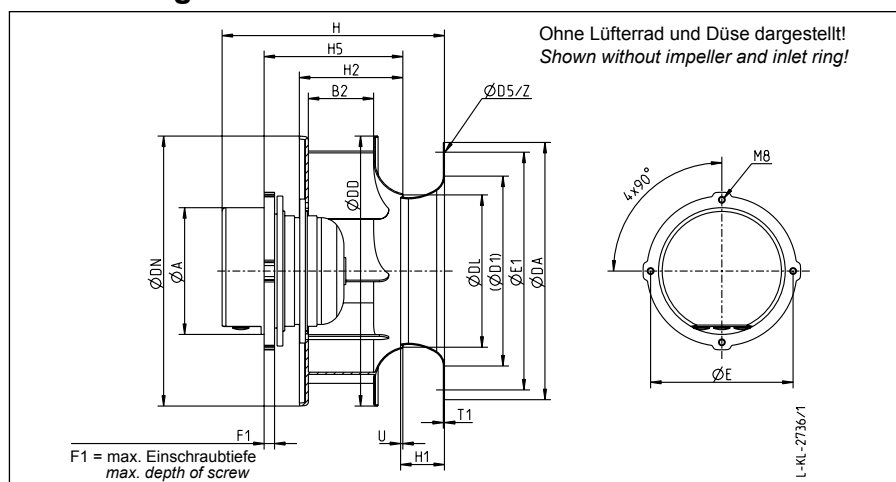

Einbaulagen Installation positions


Motorwelle horizontal
Horizontal motor shaft
H

Motorwelle vertikal
Vertical motor shaft
Vo Laufrad von oben ansaugend
Impeller at the top
Vu Laufrad von unten ansaugend
Impeller at the bottom

Ventilator-Typ Fan type	Artikel-Nr. Article no.	Controller	kg	A	B2	DA	DD	DL	DN	D1	D5	E	E1	F1	H	H1	H2	H5	T1	U	Z
RH35C-ZID.DC.1R	113 484 113 513	Basic Premium	10	169	98	378	406	228	406	286	8,5	190	352	14	318	66	150	200	1,5	3,5	4x90°

ER35C-ZID.DC.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

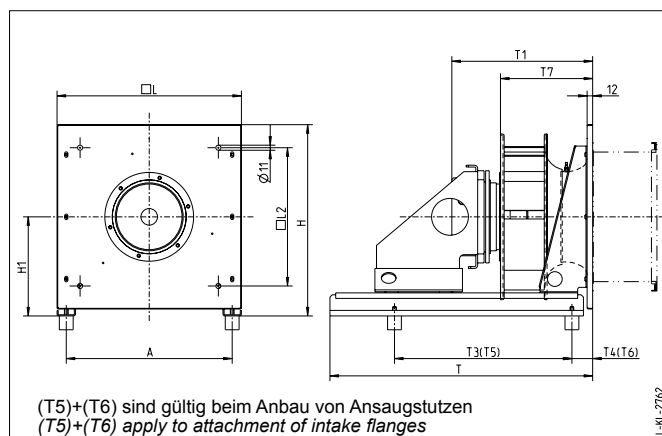


L-KL-2762

Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	L	L2	T	T1	T3	T4	T5	T6	T7
ER35C-ZID.DC.1R	113 706/A01	25	460	520	270	500	385	570	328	388	45	336	54	223

GR35C-ZID.DC.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

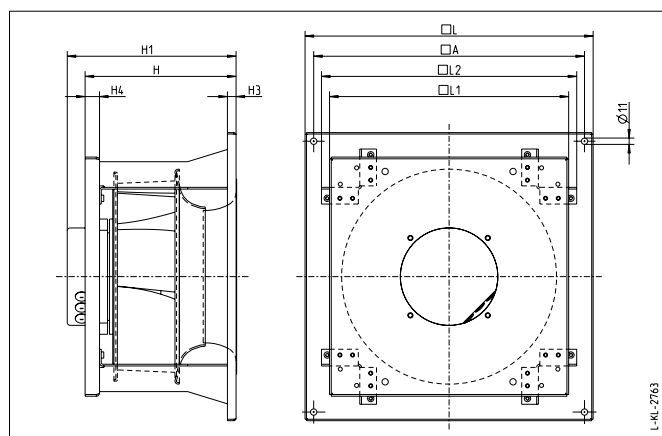

L-KL-2763


Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	H3	H4	L	L1	L2
GR35C-ZID.DC.1R	113 676/H01	22	470	285	316	15	25	500	415	443

GR35C-ZID.DC.1R

Einbaulage Motorwelle vertikal
Installation position vertical motor shaft

Lauftrad von oben ansaugend
Impeller at the top
Vo

Lauftrad von unten ansaugend
Impeller at the bottom
Vu

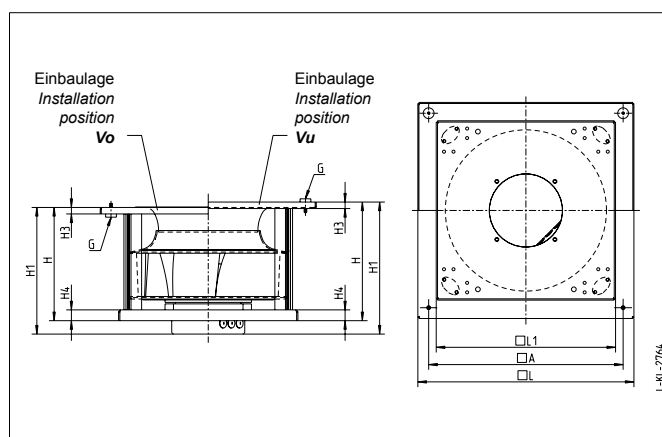

L-KL-2764

Ventilator-Type Fan type	Artikel-Nr. Article no.			A	G_	H	H1	H3	H4	L	L1
GR35C-ZID.DC.1R	113 676/O01	Vo	20	450	M6	285	316	15	25	500	415
GR35C-ZID.DC.1R	113 676/U01	Vu	20	450	M6	298	329	15	25	500	415