

Vpro-ECblue

RH40V-6IK.BF.1R

Leistungsdaten Performance data


1~ 200...277V
50/60Hz IP54

Anschlussplan KT00044A
Connection diagram

P_1	0,27	kW
I	1,45-1,05	A
n	1170	min ⁻¹
t_R	60	°C


Kennliniendaten / Characteristic data

gemessen mit Volldüse / measured with full bell mouth

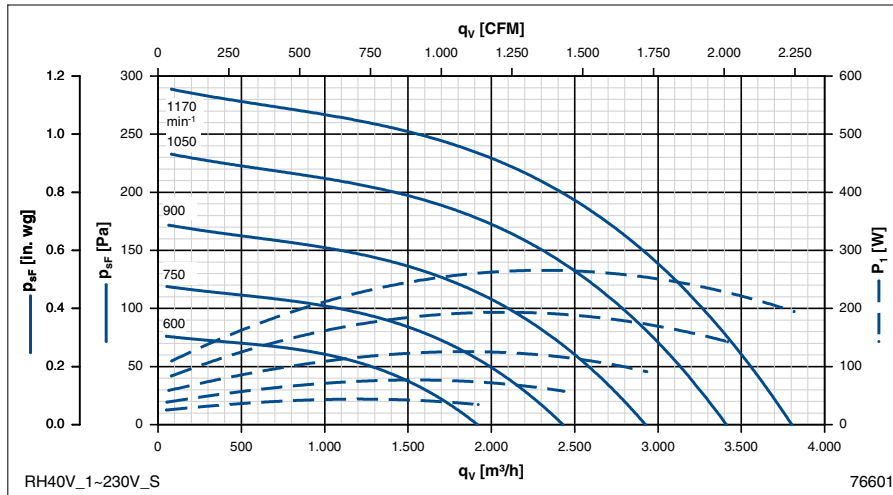


Artikel-Nr.
Article no.

Volldüse / Full bell mouth 00275570

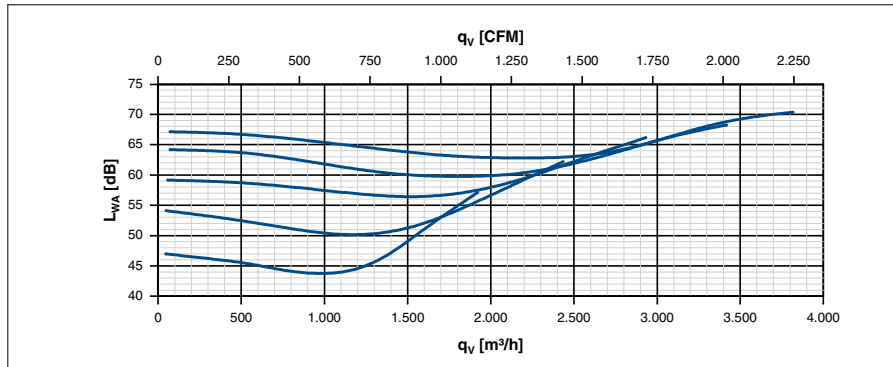

Abmessungen / Dimensions

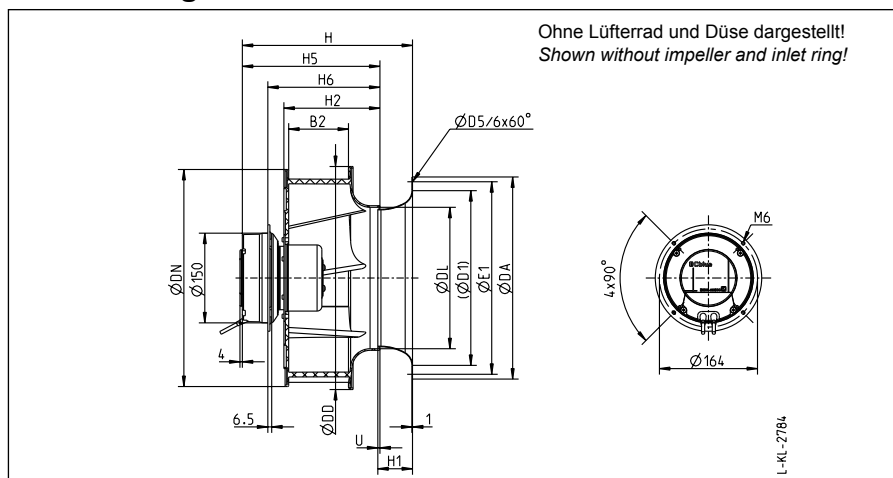

Einbaulagen Installation positions

Motorwelle horizontal
Horizontal motor shaft
H


Motorwelle vertikal
Vertical motor shaft

Vo Laufrad von oben ansaugend
Impeller at the top
Vu Laufrad von unten ansaugend
Impeller at the bottom

Ventilator-Typ Fan type	Artikel-Nr. Article no.	Controller	kg	B2	DA	DD	DL	DN	D1_	D5_	E1	H	H1	H2	H5	H6	U
RH40V-6IK.BF.1R	113 856	Basic	7	112	374	419	267	409	325	9,0	350	313	66	179	251	208	4,0

GR40V-6IK.BF.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

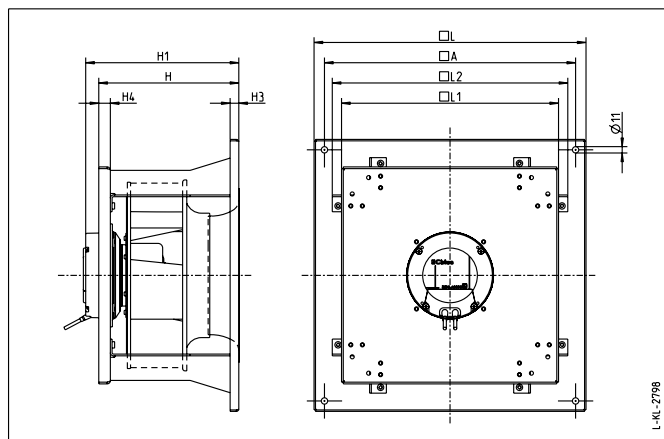

L-KL-2798


Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	H3	H4	L	L1	L2
GR40V-6IK.BF.1R	113 860/H01	24	519	294	311	15	25	550	460	493

GR40V-6IK.BF.1R

Einbaulage Motorwelle vertikal
Installation position vertical motor shaft

Lauftrad von oben ansaugend
Impeller at the top
Vo

Lauftrad von unten ansaugend
Impeller at the bottom
Vu

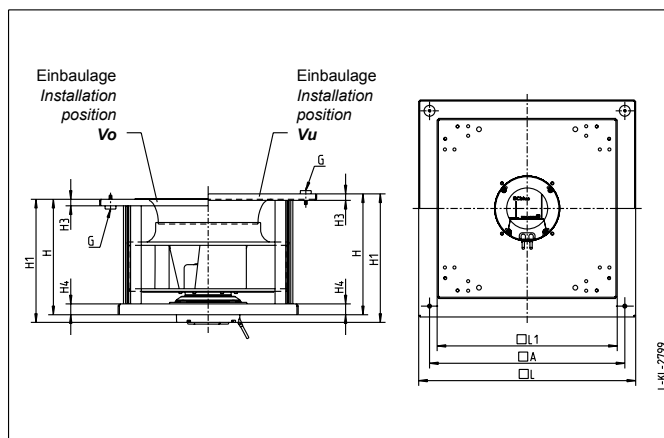

L-KL-2799

Ventilator-Typ <i>Fan type</i>	Artikel-Nr. <i>Article no.</i>			A	G_	H	H1	H3	H4	L	L1
GR40V-6IK.BF.1R	113 860/O01	Vo	21	500	M6	294	311	15	25	550	460
GR40V-6IK.BF.1R	113 860/U01	Vu	21	500	M6	306	323	15	25	550	460

Vpro-ECblue

RH40V-ZIK.DC.1R

Leistungsdaten Performance data


1~ 200...277V
50/60Hz IP54

Anschlussplan MOEA03K0
Connection diagram

P_1	0,75	kW
I	3,9-2,8	A
n	1700	min ⁻¹
t_R	60	°C


Kennliniendaten / Characteristic data

gemessen mit Volldüse / measured with full bell mouth

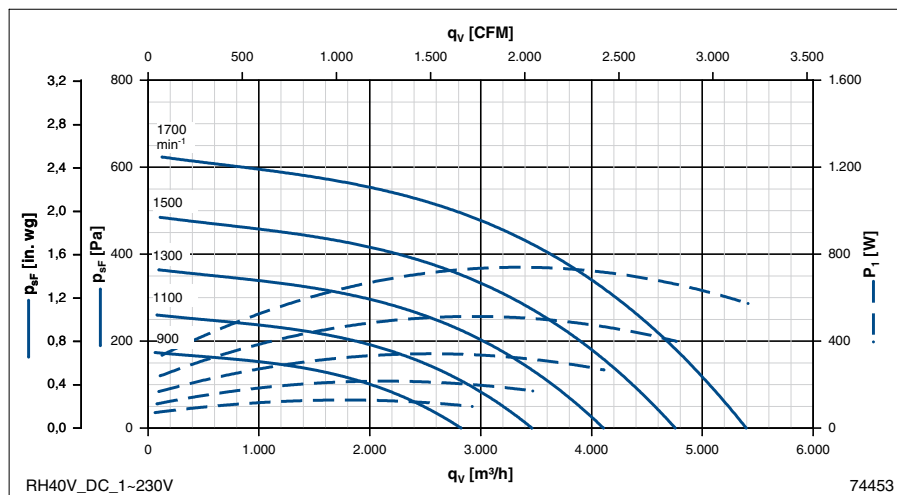


Artikel-Nr.
Article no.

Volldüse / Full bell mouth 00275570

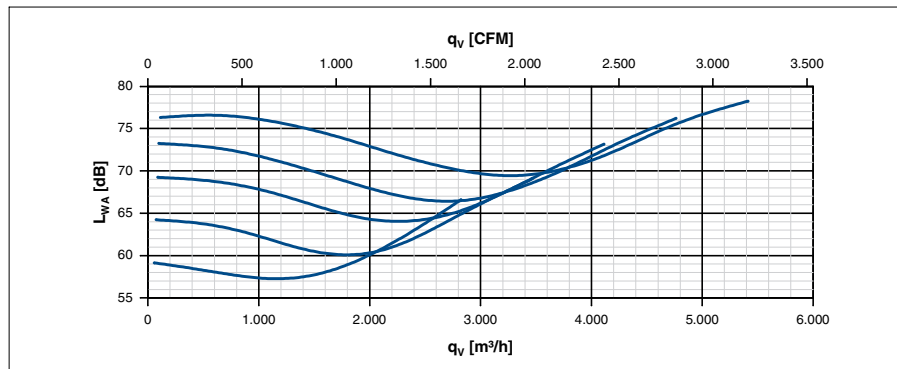

Abmessungen / Dimensions

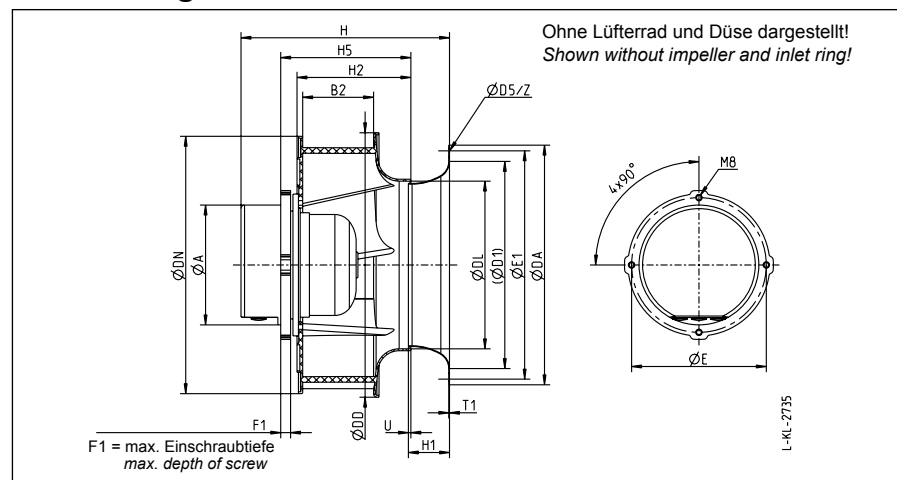

Einbaulagen Installation positions


Motorwelle horizontal
Horizontal motor shaft
H

Motorwelle vertikal
Vertical motor shaft
Vo Laufrad von oben ansaugend
Impeller at the top
Vu Laufrad von unten ansaugend
Impeller at the bottom

Ventilator-Typ Fan type	Artikel-Nr. Article no.	Controller	kg	A	B2	DA	DD	DL	DN	D1	D5	E	E1	F1	H	H1	H2	H5	T1	U	Z
RH40V-ZIK.DC.1R	113 471 113 500	Basic Premium	10	169	112	374	419	267	409	325	9,0	190	350	14	322	66	179	204	1,0	4,0	6x60°

GR40V-ZIK.DC.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

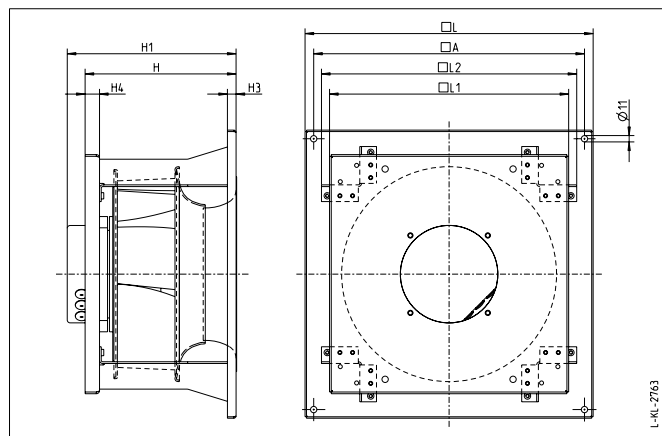

L-KL-2763


Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	H3	H4	L	L1	L2
GR40V-ZIK.DC.1R	113 656/H01	26	519	290	321	15	25	550	460	493

GR40V-ZIK.DC.1R

Einbaulage Motorwelle vertikal
Installation position vertical motor shaft

Lauftrad von oben ansaugend
Impeller at the top
Vo

Lauftrad von unten ansaugend
Impeller at the bottom
Vu

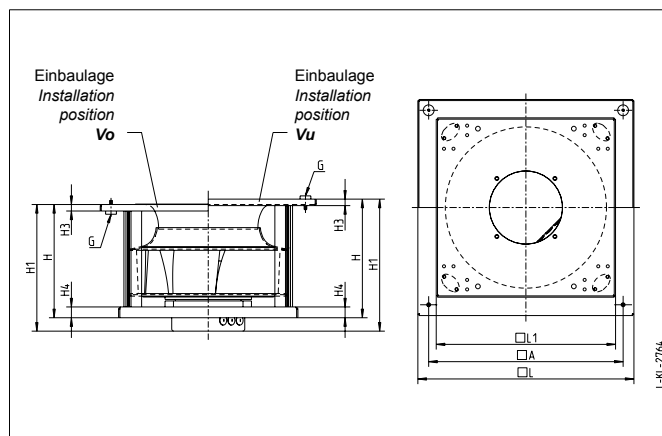

L-KL-2764

Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	G	H	H1	H3	H4	L	L1
GR40V-ZIK.DC.1R	113 656/O01	Vo	24	500	M6	290	321	15	25	550
GR40V-ZIK.DC.1R	113 656/U01	Vu	24	500	M6	302	333	15	25	550

Vpro-ECblue

RH40V-ZIK.DC.1R

Leistungsdaten Performance data


3~ 200...240V
50/60Hz IP54

Anschlussplan MOEA03K0
Connection diagram

P_1	1,4	kW
I	4,3-3,6	A
n	2100	min ⁻¹
t_R	60	°C


Kennliniendaten / Characteristic data

gemessen mit Volldüse / measured with full bell mouth

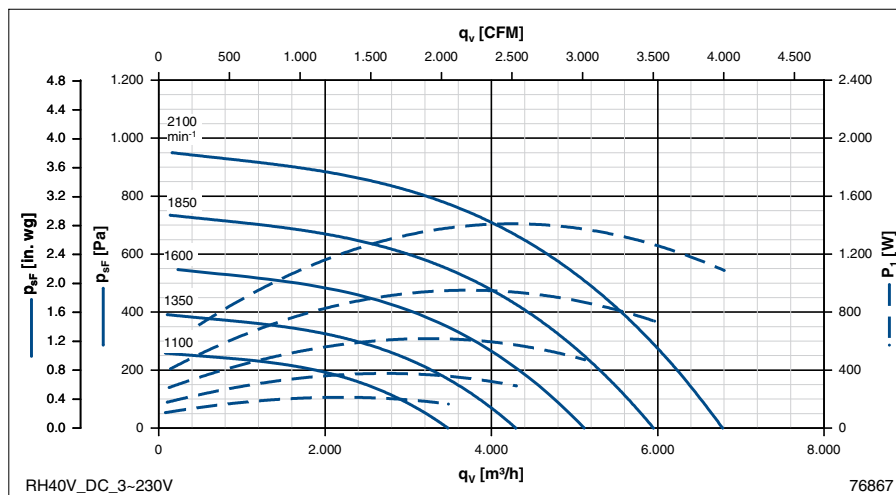


Artikel-Nr.
Article no.

Volldüse / Full bell mouth 00275570

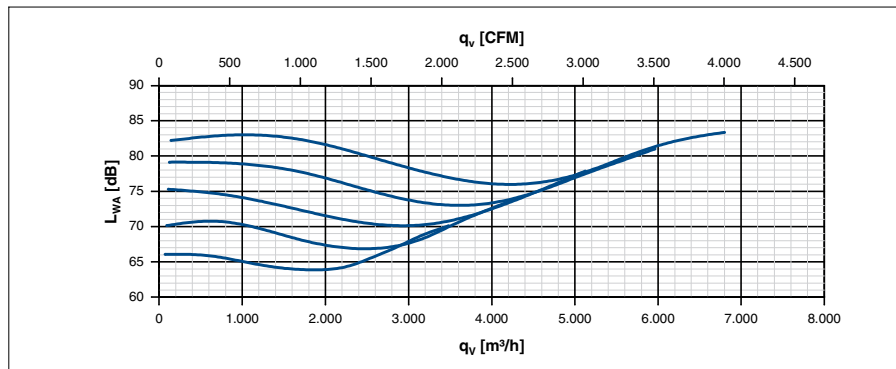

Abmessungen / Dimensions

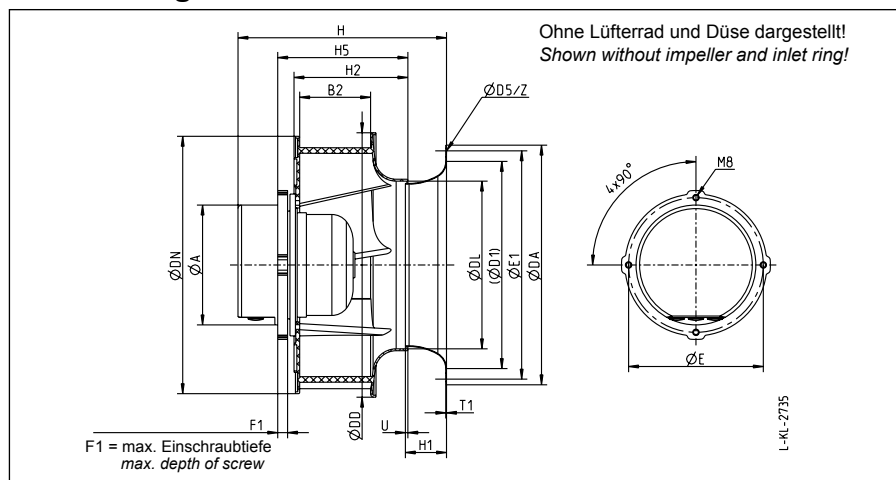

Einbaulagen Installation positions


Motorwelle horizontal
Horizontal motor shaft
H

Motorwelle vertikal
Vertical motor shaft
Vo Laufrad von oben ansaugend
Impeller at the top
Vu Laufrad von unten ansaugend
Impeller at the bottom

Ventilator-Typ Fan type	Artikel-Nr. Article no.	Controller	kg	A	B2	DA	DD	DL	DN	D1	D5	E	E1	F1	H	H1	H2	H5	T1	U	Z
RH40V-ZIK.DC.1R	113 535 113 536	Basic Premium	10	169	112	374	419	267	409	325	9,0	190	350	14	322	66	179	204	1,0	4,0	6x60°

GR40V-ZIK.DC.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

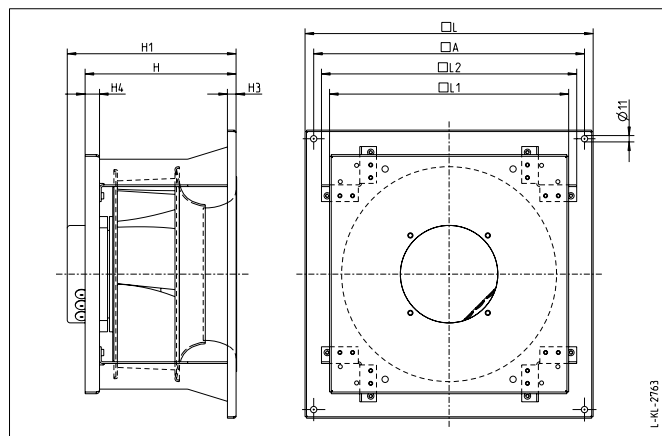

L-KL-2763

Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	H3	H4	L	L1	L2
GR40V-ZIK.DC.1R	113 654/H01	26	519	290	321	15	25	550	460	493

GR40V-ZIK.DC.1R


Einbaulage Motorwelle vertikal
Installation position vertical motor shaft

Lauftrad von oben ansaugend
Impeller at the top

Vo

Lauftrad von unten ansaugend
Impeller at the bottom

Vu

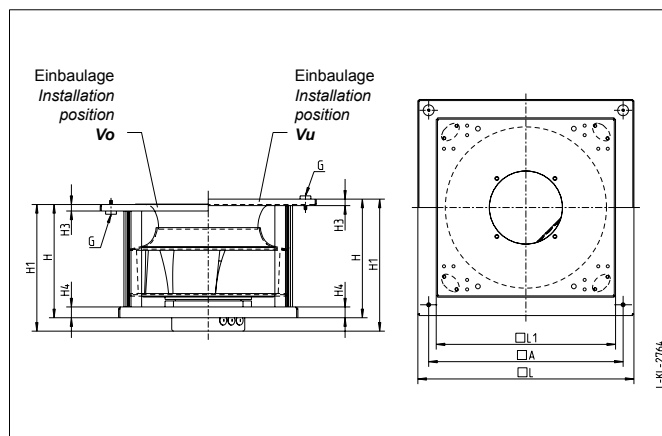

L-KL-2764

Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	G ₋	H	H1	H3	H4	L	L1
GR40V-ZIK.DC.1R	113 654/O01	Vo	24	500	M6	290	321	15	25	550
GR40V-ZIK.DC.1R	113 654/U01	Vu	24	500	M6	302	333	15	25	550

Vpro-ECblue

RH40V-ZIK.DC.1R

Leistungsdaten Performance data


3~ 380...480V
50/60Hz IP54

Anschlussplan MOEA03K0
Connection diagram

P_1	1,4	kW
I	2,4-1,9	A
n	2100	min ⁻¹
t_R	60	°C


Kennliniendaten / Characteristic data

gemessen mit Volldüse / measured with full bell mouth

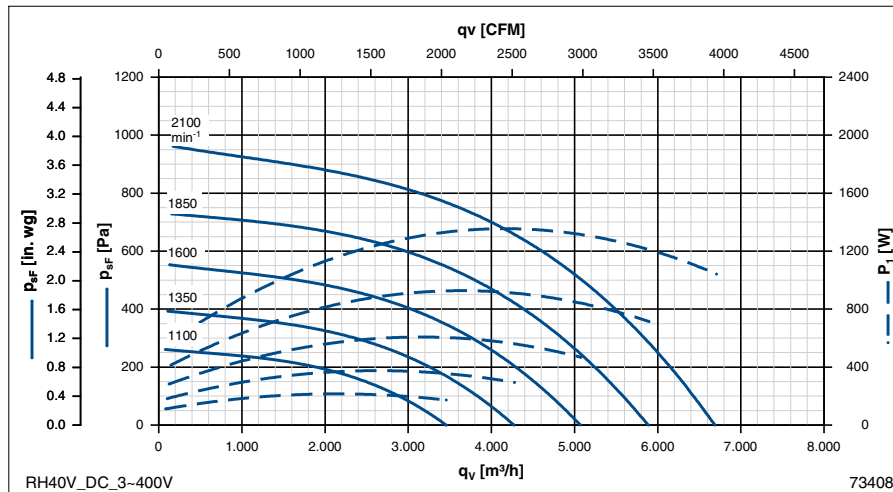


Artikel-Nr.
Article no.

Volldüse / Full bell mouth	00275570
----------------------------	----------

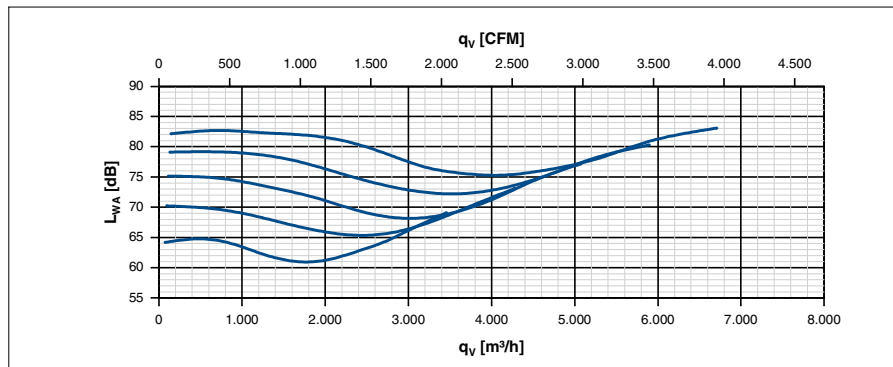

Abmessungen / Dimensions

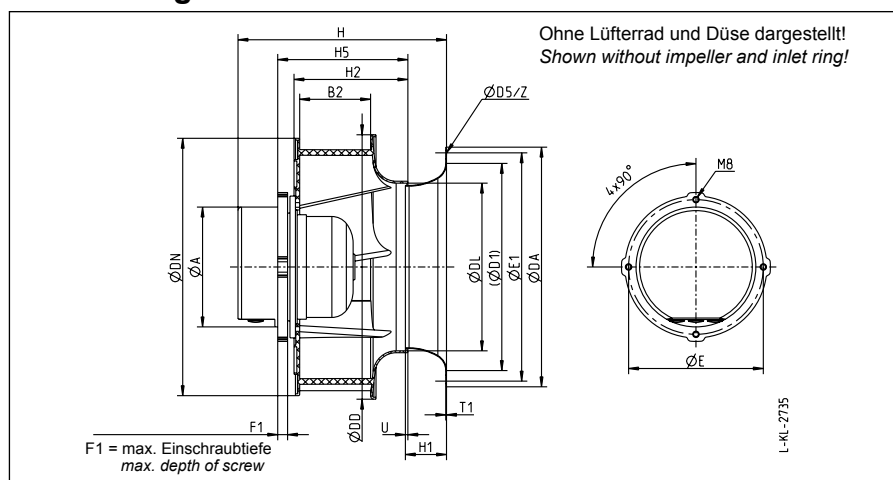

Einbaulagen Installation positions

Motorwelle horizontal
Horizontal motor shaft
H

Motorwelle vertikal
Vertical motor shaft
Vo Laufrad von oben ansaugend
Impeller at the top
Vu Laufrad von unten ansaugend
Impeller at the bottom

Ventilator-Typ Fan type	Artikel-Nr. Article no.	Controller	kg	A	B2	DA	DD	DL	DN	D1	D5	E	E1	F1	H	H1	H2	H5	T1	U	Z
RH40V-ZIK.DC.1R	113 469 113 498	Basic Premium	10	169	112	374	419	267	409	325	9,0	190	350	14	322	66	179	204	1,0	4,0	6x60°