

Vpro-ECblue

RH45V-ZIK.DC.1R

Leistungsdaten Performance data


1 ~ 200...277V
50/60Hz IP54

Anschlussplan MOEA03K0
Connection diagram

P_1	0,75	kW
I	3,9-2,8	A
n	1440	min ⁻¹
t_R	60	°C


Kennliniendaten / Characteristic data

gemessen mit Volldüse / measured with full bell mouth

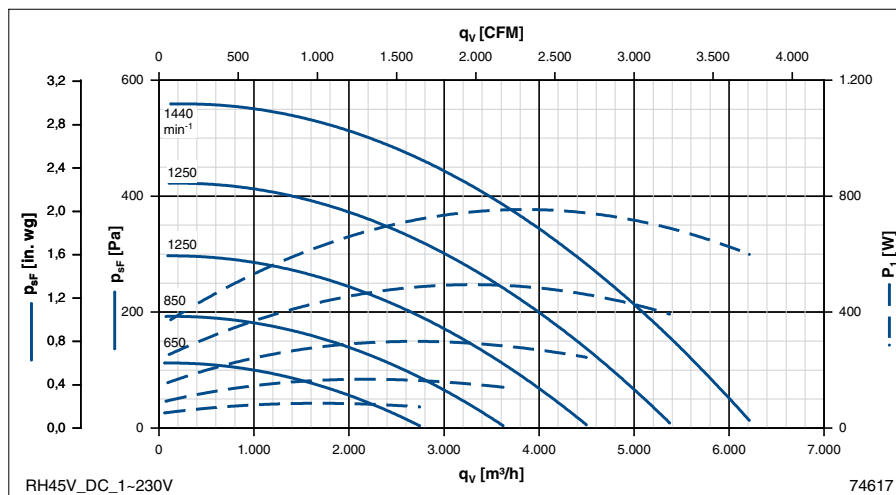


Artikel-Nr.
Article no.

Volldüse / Full bell mouth 00275571

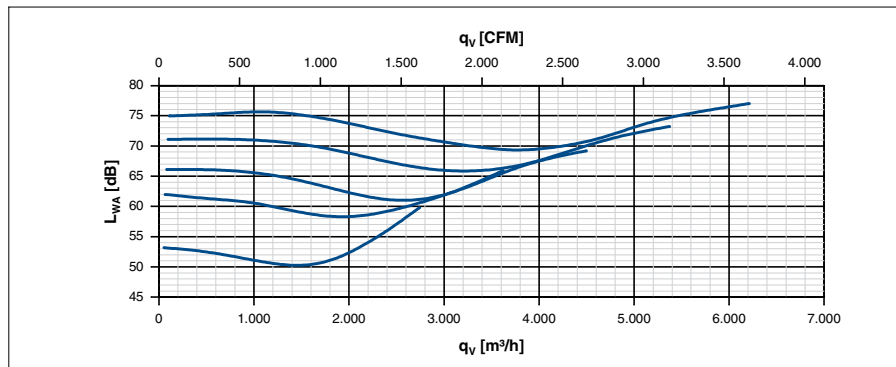

Abmessungen / Dimensions

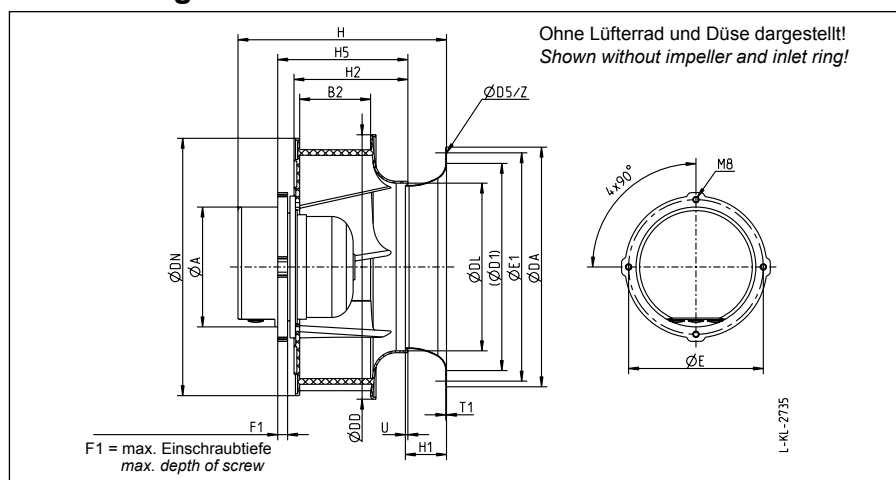

Einbaulagen Installation positions


Motorwelle horizontal
Horizontal motor shaft
H

Motorwelle vertikal
Vertical motor shaft
Vo Laufrad von oben ansaugend
Impeller at the top
Vu Laufrad von unten ansaugend
Impeller at the bottom

Ventilator-Typ Fan type	Artikel-Nr. Article no.	Controller	kg	A	B2	DA	DD	DL	DN	D1	D5	E	E1	F1	H	H1	H2	H5	T1	U	Z
RH45V-ZIK.DC.1R	113 475 113 504	Basic Premium	11	169	125	413	470	305	460	364	9,0	190	390	14	347	71	200	224	1,0	4,5	6x60°

GR45V-ZIK.DC.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

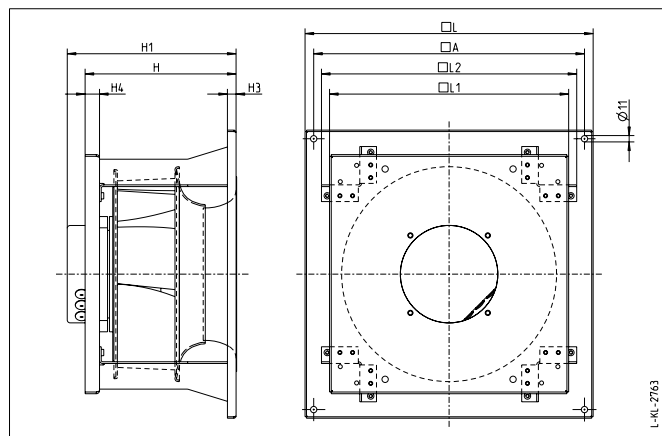

L-KL-2763


Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	H3	H4	L	L1	L2
GR45V-ZIK.DC.1R	113 662/H01	31	580	315	346	15	25	630	516	555

GR45V-ZIK.DC.1R

Einbaulage Motorwelle vertikal
Installation position vertical motor shaft

Lauftrad von oben ansaugend
Impeller at the top
Vo

Lauftrad von unten ansaugend
Impeller at the bottom
Vu

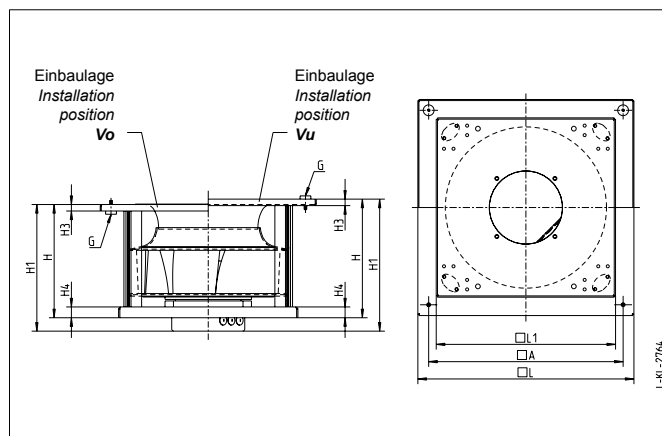

L-KL-2764

Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	G	H	H1	H3	H4	L	L1
GR45V-ZIK.DC.1R	113 662/O01	Vo	28	550	M6	315	346	15	25	600
GR45V-ZIK.DC.1R	113 662/U01	Vu	28	550	M6	327	358	15	25	600

Vpro-ECblue

RH45V-ZIK.DC.1R

Leistungsdaten Performance data


3~ 200...240V
50/60Hz IP54

Anschlussplan MOEA03K0
Connection diagram

P_1	1,5	kW
I	4,7-3,9	A
n	1800	min ⁻¹
t_R	60	°C


Kennliniendaten / Characteristic data

gemessen mit Volldüse / measured with full bell mouth

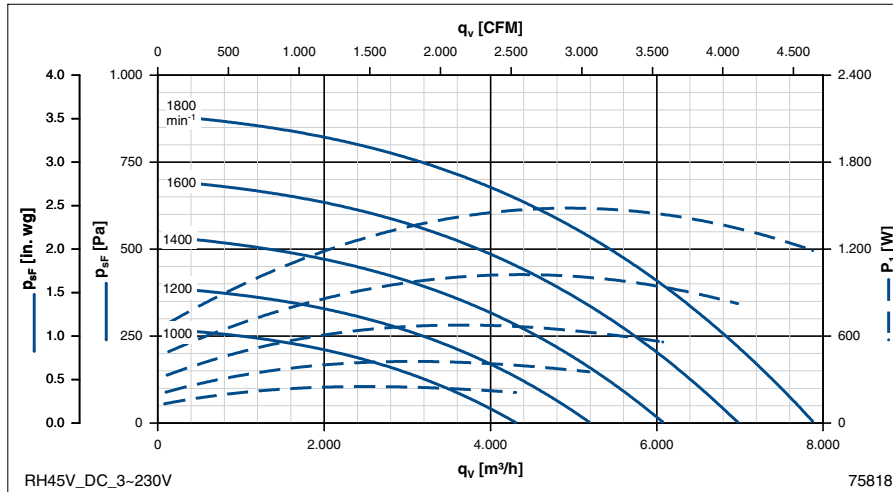


Artikel-Nr.
Article no.

Volldüse / Full bell mouth	00275571
----------------------------	----------

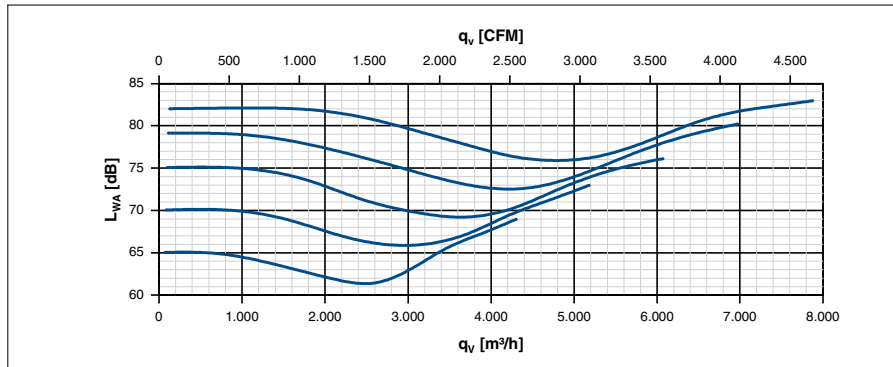

Abmessungen / Dimensions

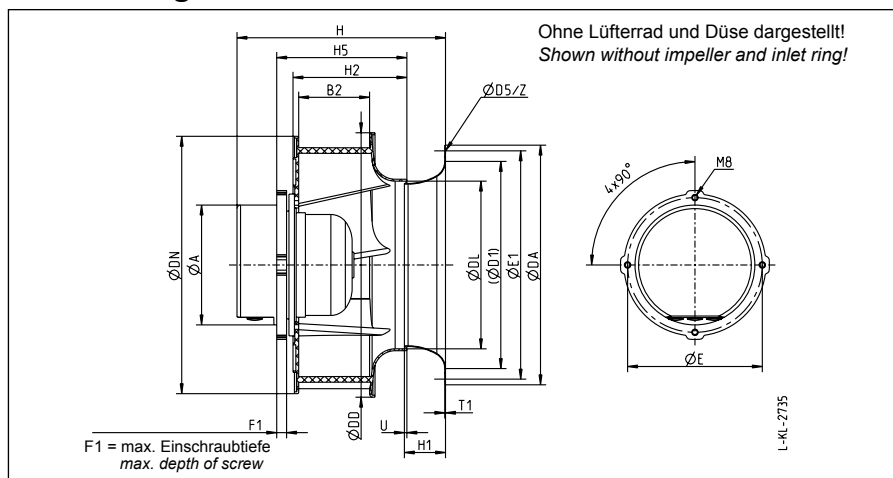

Einbaulagen Installation positions


Motorwelle horizontal
Horizontal motor shaft
H

Motorwelle vertikal
Vertical motor shaft
Vo Laufrad von oben ansaugend
Impeller at the top
Vu Laufrad von unten ansaugend
Impeller at the bottom

Ventilator-Typ Fan type	Artikel-Nr. Article no.	Controller	kg	A	B2	DA	DD	DL	DN	D1	D5	E	E1	F1	H	H1	H2	H5	T1	U	Z
RH45V-ZIK.DC.1R	113 539 113 540	Basic Premium	11	169	125	413	470	305	460	364	9,0	190	390	14	347	71	200	224	1,0	4,5	6x60°

GR45V-ZIK.DC.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

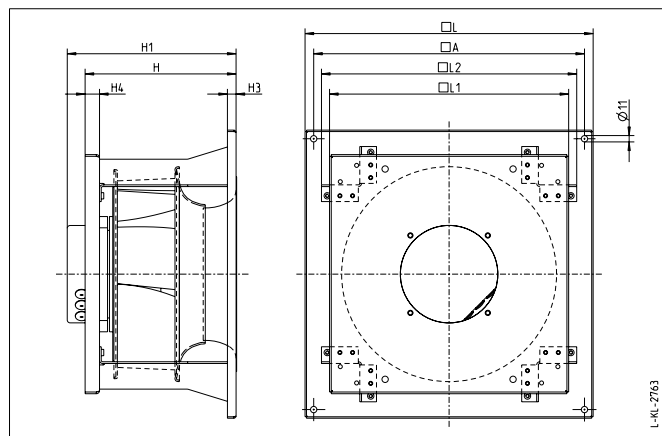

L-KL-2763


Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	H3	H4	L	L1	L2
GR45V-ZIK.DC.1R	113 660/H01	31	580	315	346	15	25	630	516	555

GR45V-ZIK.DC.1R

Einbaulage Motorwelle vertikal
Installation position vertical motor shaft

Lauftrad von oben ansaugend
Impeller at the top
Vo

Lauftrad von unten ansaugend
Impeller at the bottom
Vu

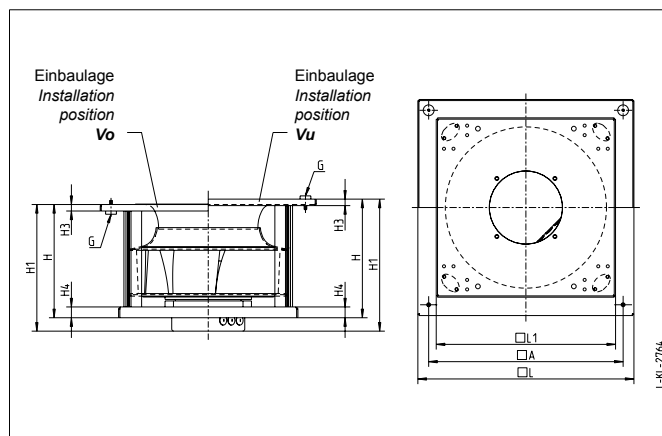

L-KL-2764

Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	G	H	H1	H3	H4	L	L1
GR45V-ZIK.DC.1R	113 660/O01	Vo	28	550	M6	315	346	15	25	600
GR45V-ZIK.DC.1R	113 660/U01	Vu	28	550	M6	327	358	15	25	600

Vpro-ECblue

RH45V-ZIK.DC.1R

Leistungsdaten Performance data


3~ 380...480V
50/60Hz IP54

Anschlussplan MOEA03K0
Connection diagram

P_1	1,45	kW
I	2,5-2,0	A
n	1800	min ⁻¹
t_R	60	°C


Kennliniendaten / Characteristic data

gemessen mit Volldüse / measured with full bell mouth

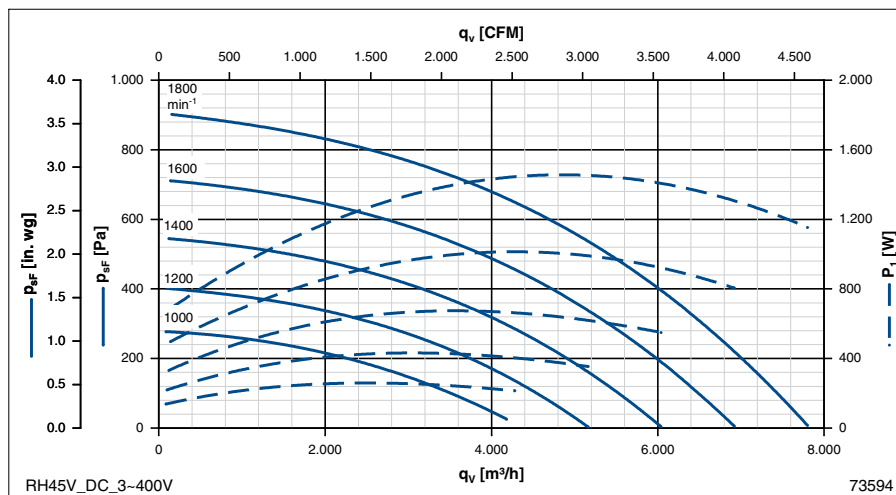


Artikel-Nr.
Article no.

Volldüse / Full bell mouth 00275571

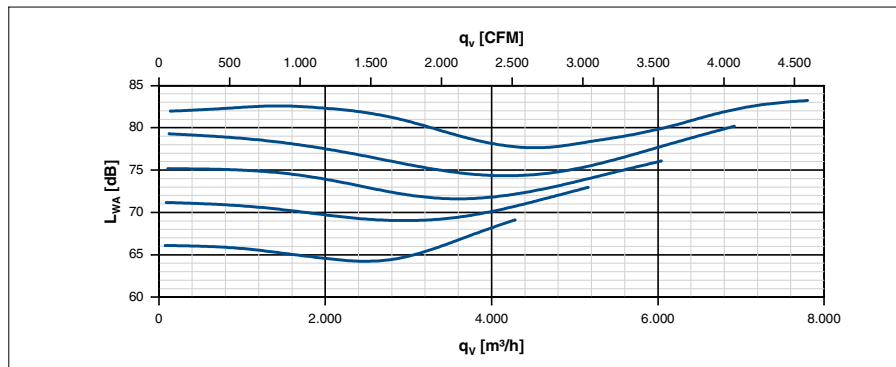

Abmessungen / Dimensions

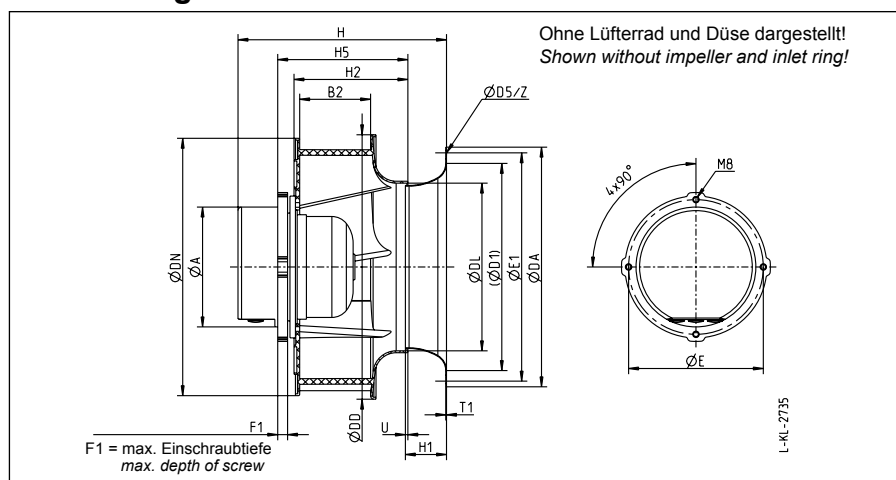

Einbaulagen Installation positions


Motorwelle horizontal
Horizontal motor shaft
H

Motorwelle vertikal
Vertical motor shaft
Vo Laufrad von oben ansaugend
Impeller at the top
Vu Laufrad von unten ansaugend
Impeller at the bottom

Ventilator-Typ Fan type	Artikel-Nr. Article no.	Controller	kg	A	B2	DA	DD	DL	DN	D1	D5	E	E1	F1	H	H1	H2	H5	T1	U	Z
RH45V-ZIK.DC.1R	113 473 113 502	Basic Premium	11	169	125	413	470	305	460	364	9,0	190	390	14	347	71	200	224	1,0	4,5	6x60°

GR45V-ZIK.DC.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

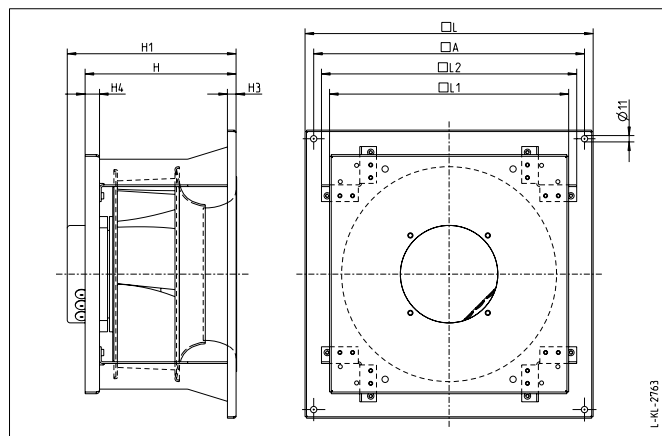

L-KL-2763


Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	H3	H4	L	L1	L2
GR45V-ZIK.DC.1R	113 658/H01	31	580	315	346	15	25	630	516	555

GR45V-ZIK.DC.1R

Einbaulage Motorwelle vertikal
Installation position vertical motor shaft

Lauftrad von oben ansaugend
Impeller at the top
Vo

Lauftrad von unten ansaugend
Impeller at the bottom
Vu

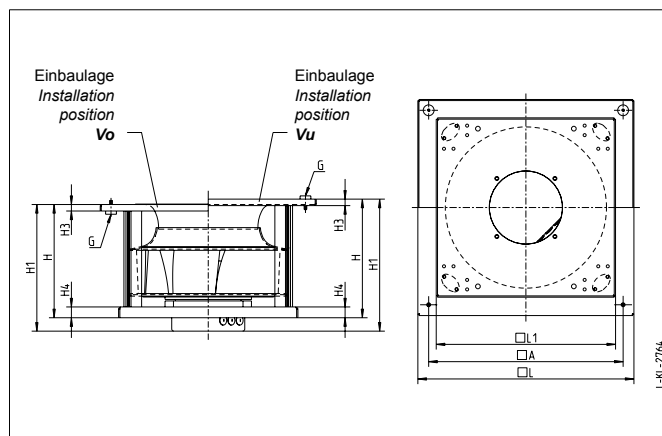

L-KL-2764

Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	G	H	H1	H3	H4	L	L1
GR45V-ZIK.DC.1R	113 658/O01	Vo	28	550	M6	315	346	15	25	600
GR45V-ZIK.DC.1R	113 658/U01	Vu	28	550	M6	327	358	15	25	600



RH45V-ZIK.GG.1R

**3~ 200...240V
50/60Hz IP54**

P_1	2,6	kW
I	8,0-6,7	A
n	2120	min^{-1}
t_B	60	$^{\circ}\text{C}$

Anschlussplan MOEA03K0

gemessen mit Volldüse / *measured with full bell mouth*

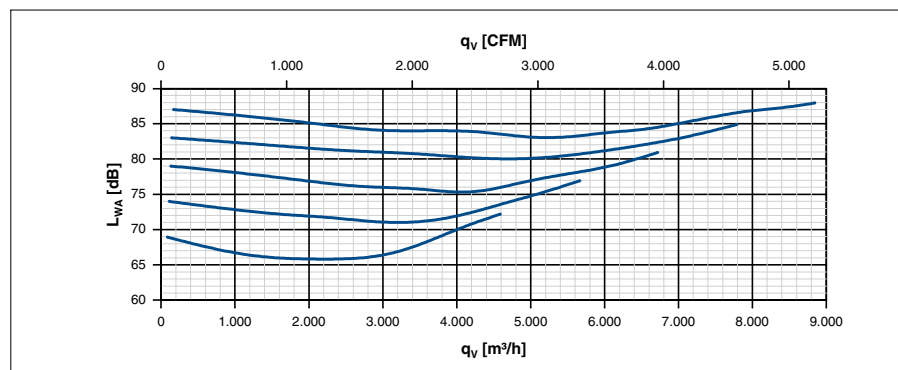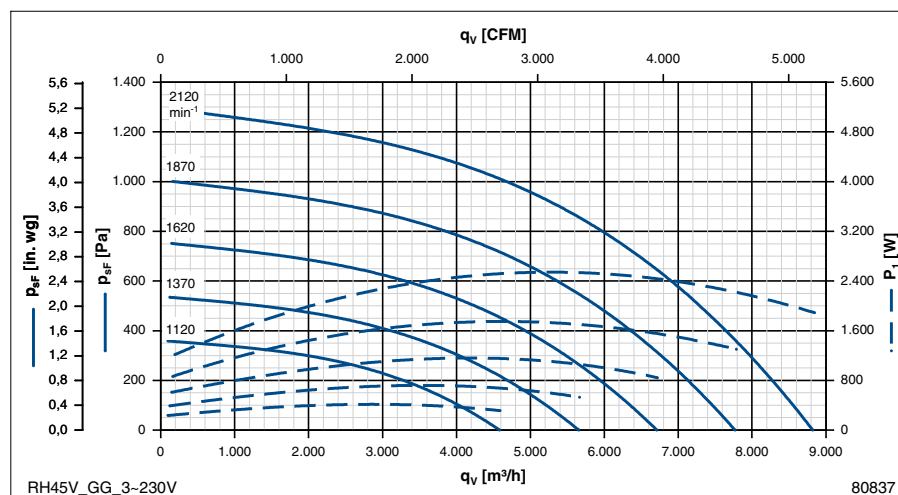
Artikel-Nr.
Article no.

Volldüse / *Full bell mouth*

00275571

Einbaulagen

Installation positions

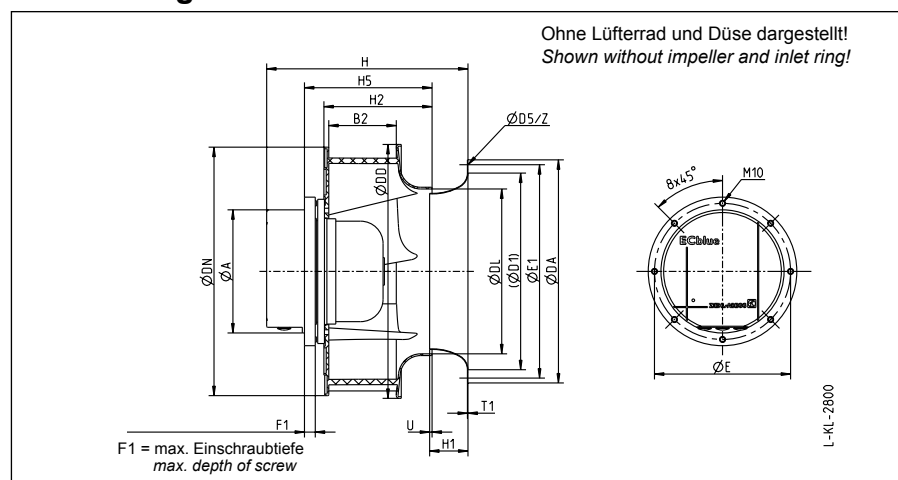

Motorwelle horizontal
Horizontal motor shaft
H

Motorwelle vertikal
Vertical motor shaft


Vo Laufrad von oben ansaugend
Impeller at the top

Vu Laufrad von unten ansaugend
Impeller at the bottom

Ventilator-Typ Fan type	Artikel-Nr. Article no.	Controller	kg	A	B2	DA	DD	DL	DN	D1	D5	E	E1	F1	H	H1	H2	H5	T1	U	Z
RH45V-ZIK.GG.1R	113 932 113 933	Basic Premium	20	228	125	413	470	305	460	364	9,0	252	390	20	373	71	200	236	1,0	4,5	6x60°

GR45V-ZIK.GG.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

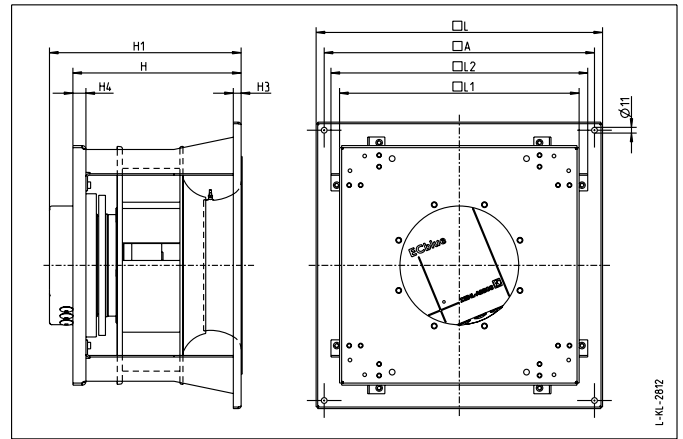

L-KL-2812


Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	H3	H4	L	L1	L2
GR45V-ZIK.GG.1R	114 004/H01	40	580	327	372	15	25	630	516	555

GR45V-ZIK.GG.1R

Einbaulage Motorwelle vertikal
Installation position vertical motor shaft

Lauftrad von oben ansaugend
Impeller at the top
Vo

Lauftrad von unten ansaugend
Impeller at the bottom
Vu

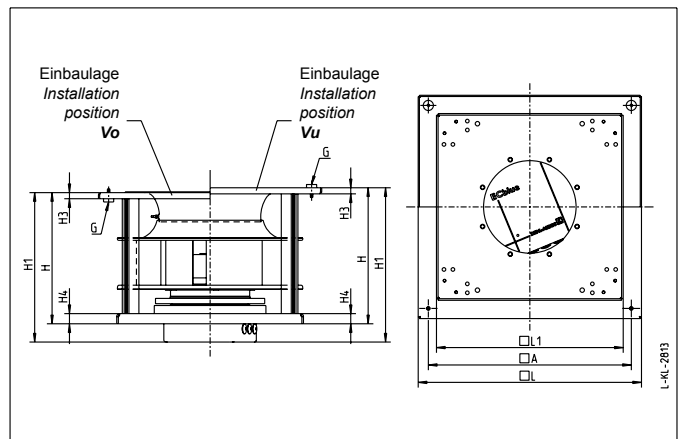

L-KL-2813

Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	G	H	H1	H3	H4	L	L1
GR45V-ZIK.GG.1R	114 004/O01	Vo	37	550	M6	327	372	15	25	600
GR45V-ZIK.GG.1R	114 004/U01	Vu	37	550	M6	339	384	15	25	600



RH45V-ZIK.GG.1R

**3~ 380...480V
50/60Hz IP54**

P ₁	2,6	kW
I	4,2-3,3	A
n	2120	min ⁻¹
t _B	60	°C

Anschlussplan MOEA03K0

gemessen mit Volldüse / *measured with full bell mouth*

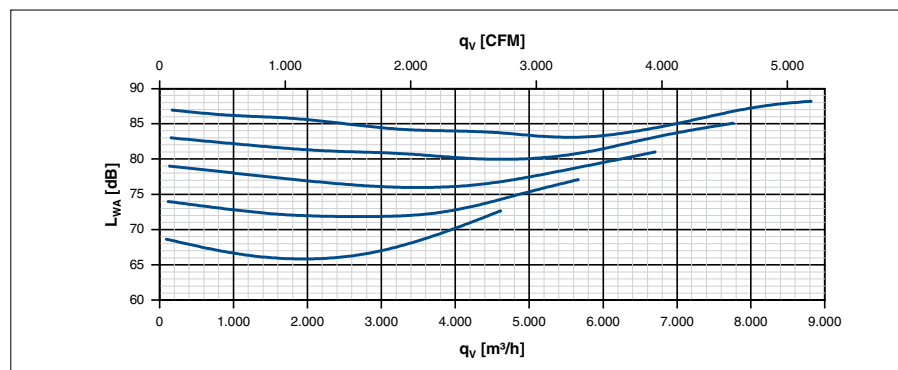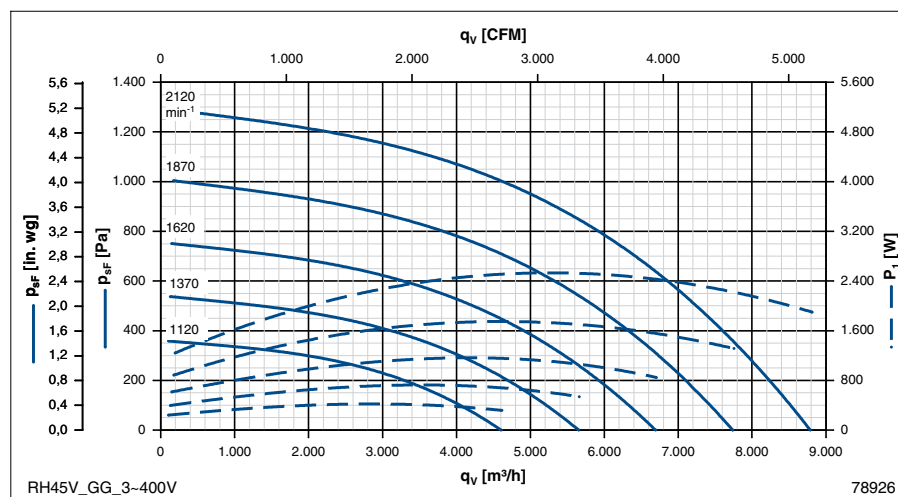
Artikel-Nr.
Article no.

Volldüse / *Full bell mouth*

00275571

Einbaulagen

Installation positions

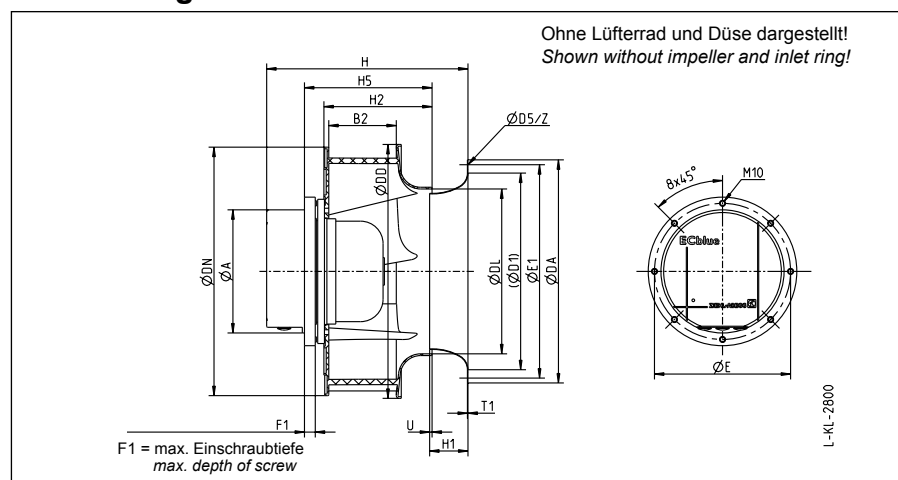

Motorwelle horizontal
Horizontal motor shaft
H

Motorwelle vertikal
Vertical motor shaft


Vo Laufrad von oben ansaugend
Impeller at the top

Vu Laufrad von unten ansaugend
Impeller at the bottom

Ventilator-Typ Fan type	Artikel-Nr. Article no.	Controller	kg	A	B2	DA	DD	DL	DN	D1	D5	E	E1	F1	H	H1	H2	H5	T1	U	Z
RH45V-ZIK.GG.1R	113 930 113 931	Basic Premium	20	228	125	413	470	305	460	364	9,0	252	390	20	373	71	200	236	1,0	4,5	6x60°

GR45V-ZIK.GG.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

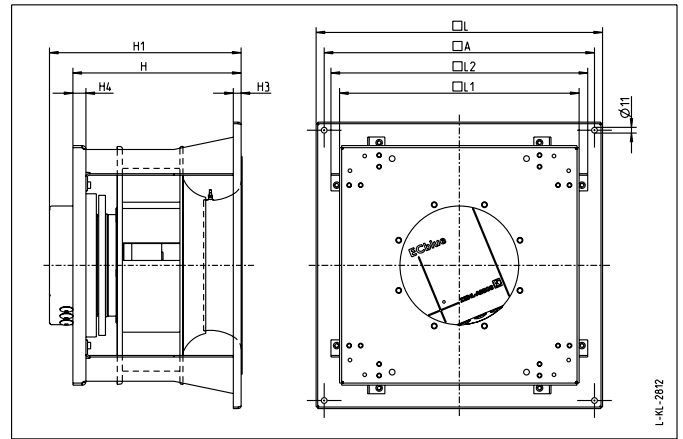

L-KL-2812


Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	H3	H4	L	L1	L2
GR45V-ZIK.GG.1R	114 002/H01	40	580	327	372	15	25	630	516	555

GR45V-ZIK.GG.1R

Einbaulage Motorwelle vertikal
Installation position vertical motor shaft

Lauftrad von oben ansaugend
Impeller at the top
Vo

Lauftrad von unten ansaugend
Impeller at the bottom
Vu

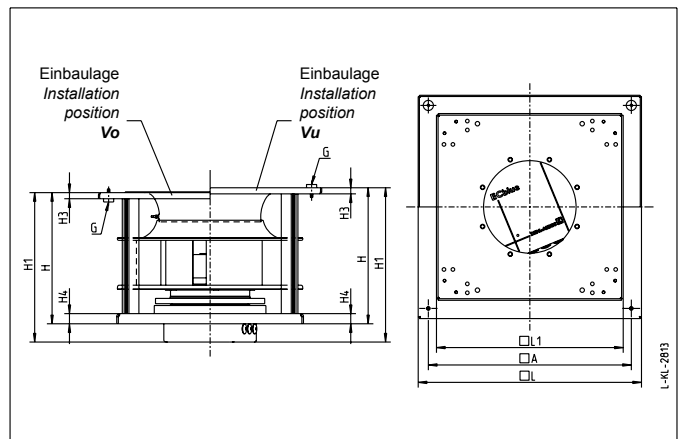

L-KL-2813

Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	G	H	H1	H3	H4	L	L1
GR45V-ZIK.GG.1R	114 002/O01	Vo	37	550	M6	327	372	15	25	600
GR45V-ZIK.GG.1R	114 002/U01	Vu	37	550	M6	339	384	15	25	600