

RH..C-ECblue

RH63C-ZIK.GG.1R

Leistungsdaten Performance data


3~ 200...240V
50/60Hz IP54

Anschlussplan MOEA03K0
Connection diagram

P_1	3,0	kW
I	9,2-7,7	A
n	1230	min ⁻¹
t_R	40	°C

Kennliniendaten / Characteristic data


gemessen mit Volldüse / measured with full bell mouth

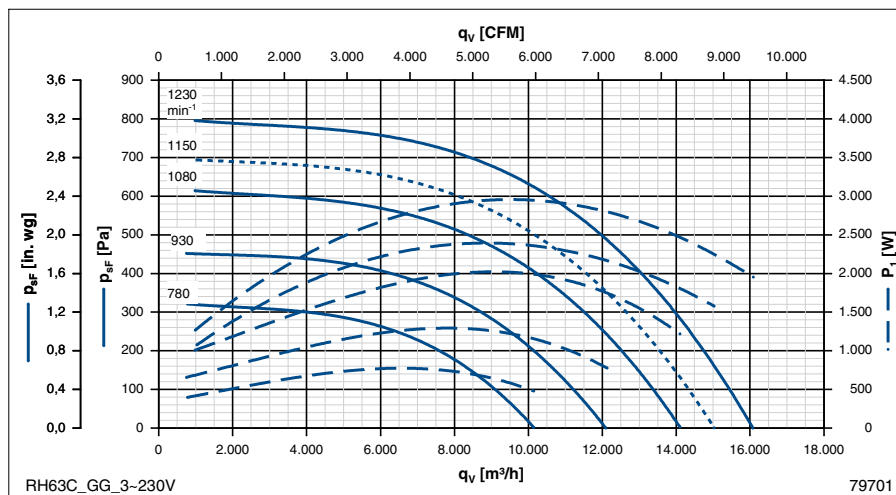


Artikel-Nr.
Article no.

Volldüse / Full bell mouth	00401301
----------------------------	----------

..... Drehzahl für
Operating speed for
 $t_R = 60\text{ °C}$

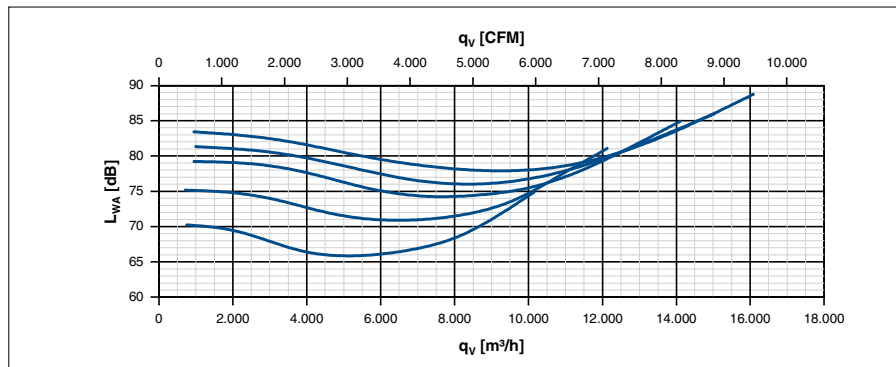

Abmessungen / Dimensions

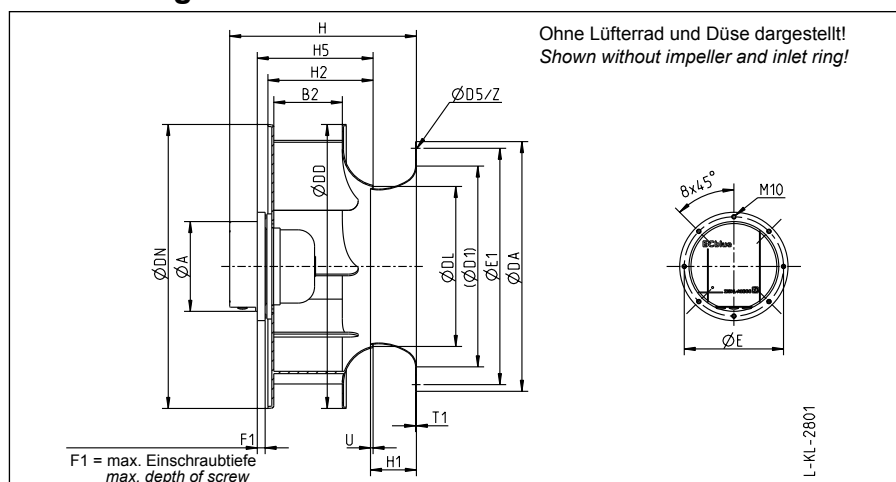

Einbaulagen Installation positions


Motorwelle horizontal
Horizontal motor shaft
H

Motorwelle vertikal
Vertical motor shaft
Vo Laufrad von oben ansaugend
Impeller at the top
Vu Laufrad von unten ansaugend
Impeller at the bottom

Ventilator-Typ Fan type	Artikel-Nr. Article no.	Controller	kg	A	B2	DA	DD	DL	DN	D1	D5	E	E1	F1	H	H1	H2	H5	T1	U	Z
RH63C-ZIK.GG.1R	113 980 113 981	Basic Premium	29	228	174	634	721	406	721	510	10,5	252	600	20	474	117	267	294	2,0	6,5	6x60°

ER63C-ZIK.GG.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

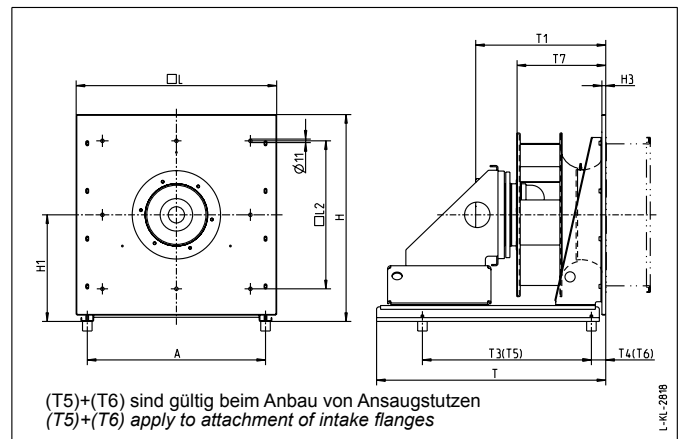


L-KL-2818

Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	H3	L	L2	T	T1	T3	T4	T5	T6	T7
ER63C-ZIK.GG.1R	114 092/A01	70	720	813	433	20	760	660	880	492	639	45	605	45	395

GR63C-ZIK.GG.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

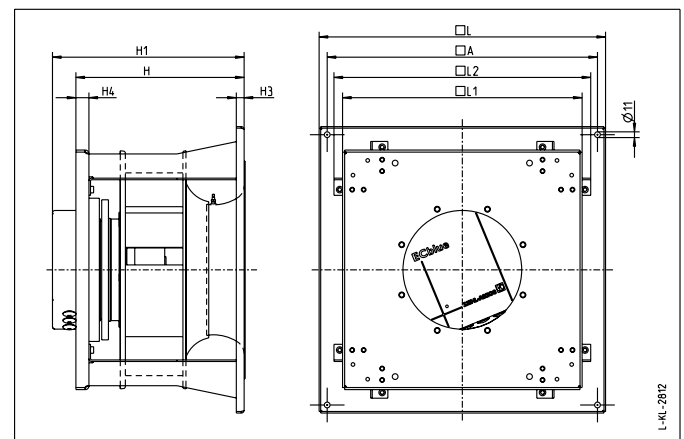

L-KL-2812


Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	H3	H4	L	L1	L2
GR63C-ZIK.GG.1R	114 052/H01	77	800	442	472	25	40	840	722	770

GR63C-ZIK.GG.1R

Einbaulage Motorwelle vertikal
Installation position vertical motor shaft

Lauftrad von oben ansaugend
Impeller at the top
Vo

Lauftrad von unten ansaugend
Impeller at the bottom
Vu

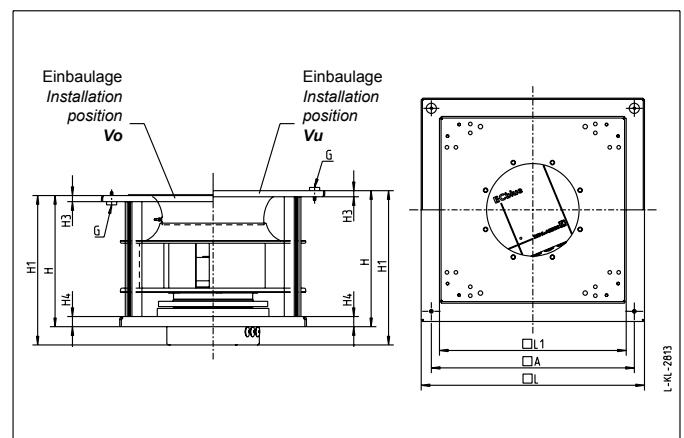

L-KL-2813

Ventilator-Typ Fan type	Artikel-Nr. Article no.			A	G_	H	H1	H3	H4	L	L1
GR63C-ZIK.GG.1R	114 052/O01	Vo	76	780	M8	442	472	25	40	840	722
GR63C-ZIK.GG.1R	114 052/U01	Vu	76	780	M8	463	493	25	40	840	722

RH..C-ECblue

RH63C-ZIK.GG.1R

Leistungsdaten Performance data


3~ 380...480V
50/60Hz IP54

Anschlussplan MOEA03K0
Connection diagram

P_1	3,0	kW
I	4,8-3,8	A
n	1230	min ⁻¹
t_R	40	°C

Kennliniendaten / Characteristic data


gemessen mit Volldüse / measured with full bell mouth

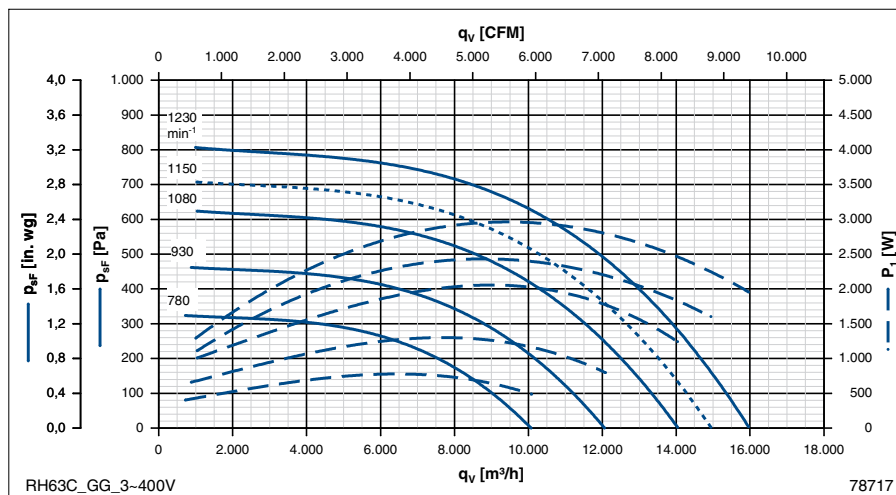


Artikel-Nr.
Article no.

Volldüse / Full bell mouth	00401301
----------------------------	----------

..... Drehzahl für
Operating speed for
 $t_R = 60\text{ °C}$

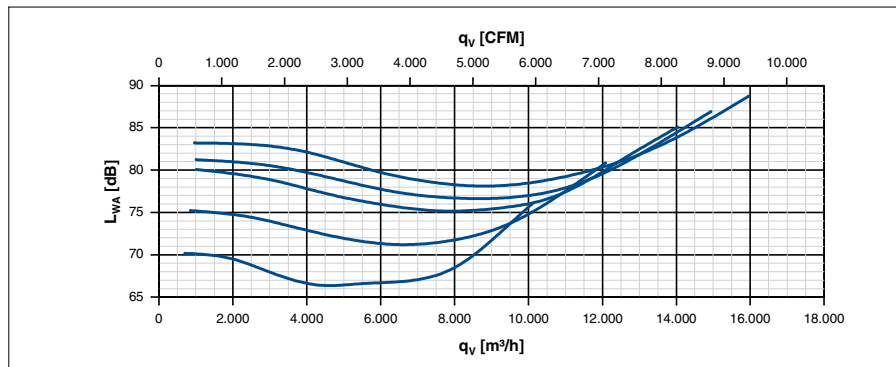

Abmessungen / Dimensions

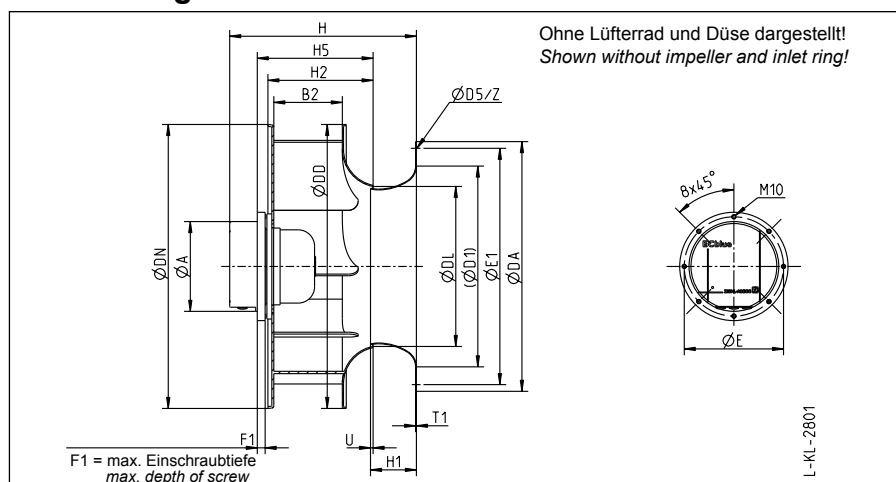

Einbaulagen Installation positions


Motorwelle horizontal
Horizontal motor shaft
H

Motorwelle vertikal
Vertical motor shaft
Vo Laufrad von oben ansaugend
Impeller at the top
Vu Laufrad von unten ansaugend
Impeller at the bottom

Ventilator-Typ Fan type	Artikel-Nr. Article no.	Controller	kg	A	B2	DA	DD	DL	DN	D1	D5	E	E1	F1	H	H1	H2	H5	T1	U	Z
RH63C-ZIK.GG.1R	113 978 113 979	Basic Premium	29	228	174	634	721	406	721	510	10,5	252	600	20	474	117	267	294	2,0	6,5	6x60°

ER63C-ZIK.GG.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

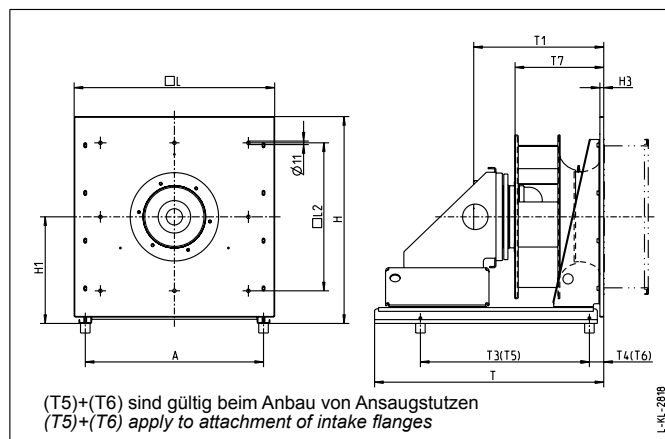


L-KL-2818

Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	H3	L	L2	T	T1	T3	T4	T5	T6	T7
ER63C-ZIK.GG.1R	114 090/A01	70	720	813	433	20	760	660	880	492	639	45	605	45	395

GR63C-ZIK.GG.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

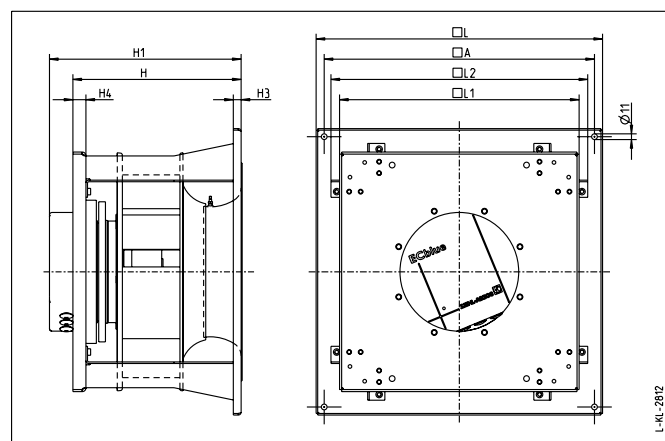

L-KL-2812


Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	H3	H4	L	L1	L2
GR63C-ZIK.GG.1R	114 050/H01	77	800	442	472	25	40	840	722	770

GR63C-ZIK.GG.1R

Einbaulage Motorwelle vertikal
Installation position vertical motor shaft

Lauftrad von oben ansaugend
Impeller at the top
Vo

Lauftrad von unten ansaugend
Impeller at the bottom
Vu

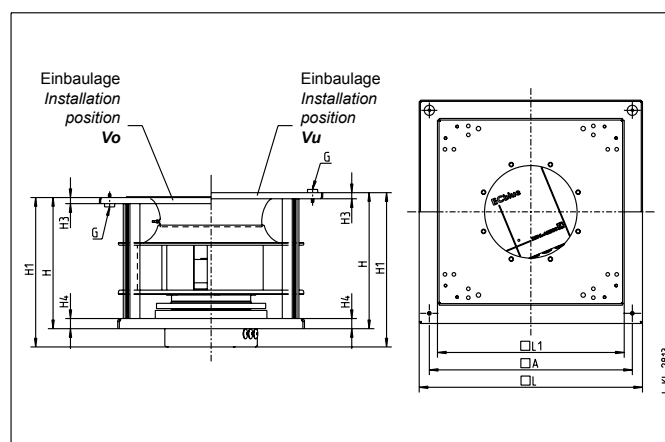

L-KL-2813

Ventilator-Typ Fan type	Artikel-Nr. Article no.			A	G_	H	H1	H3	H4	L	L1
GR63C-ZIK.GG.1R	114 050/O01	Vo	76	780	M8	442	472	25	40	840	722
GR63C-ZIK.GG.1R	114 050/U01	Vu	76	780	M8	463	493	25	40	840	722

RH..C-ECblue

RH63C-ZIK.GL.1R

Leistungsdaten Performance data


3~ 200...240V
50/60Hz IP54

Anschlussplan MOEA03K0
Connection diagram

P_1	3,5	kW
I	10,5-8,8	A
n	1300	min ⁻¹
t_R	50	°C

Kennliniendaten / Characteristic data


gemessen mit Volldüse / measured with full bell mouth

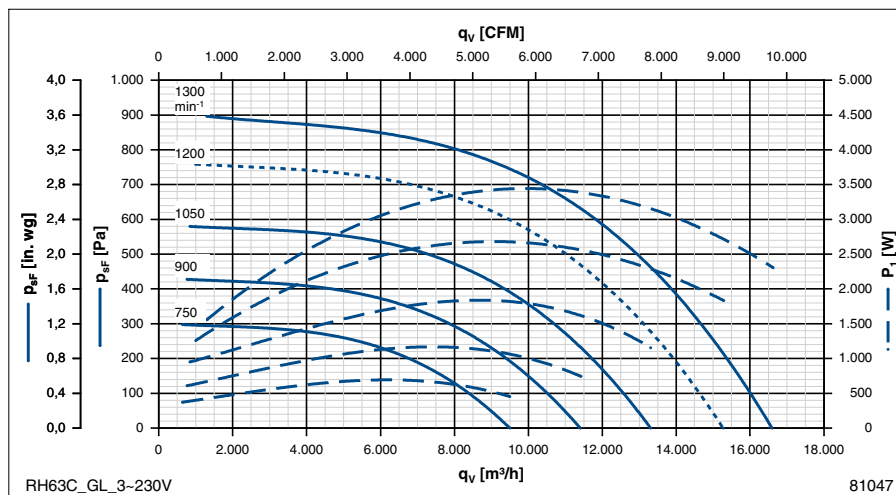


Artikel-Nr.
Article no.

Volldüse / Full bell mouth	00401301
----------------------------	----------

..... Drehzahl für
Operating speed for
 $t_R = 60\text{ °C}$

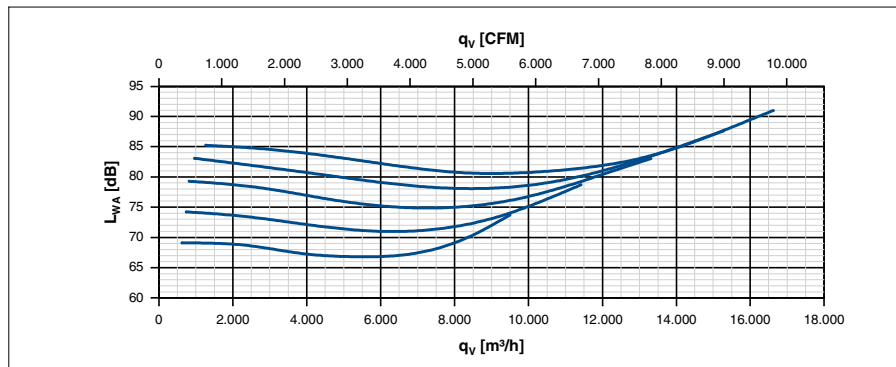

Abmessungen / Dimensions

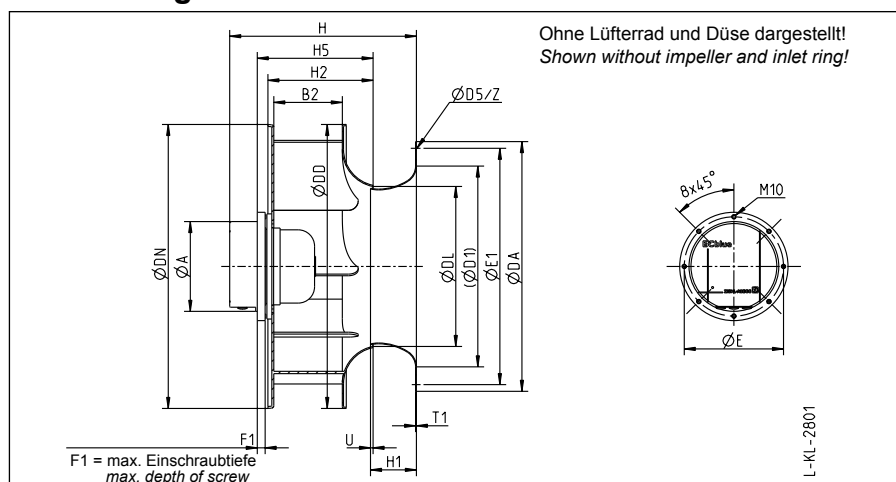

Einbaulagen Installation positions


Motorwelle horizontal
Horizontal motor shaft
H

Motorwelle vertikal
Vertical motor shaft
Vo Laufrad von oben ansaugend
Impeller at the top
Vu Laufrad von unten ansaugend
Impeller at the bottom

Ventilator-Typ Fan type	Artikel-Nr. Article no.	Controller	kg	A	B2	DA	DD	DL	DN	D1	D5	E	E1	F1	H	H1	H2	H5	T1	U	Z
RH63C-ZIK.GL.1R	114 000 114 001	Basic Premium	33	228	174	634	721	406	721	510	10,5	252	600	20	474	117	267	294	2,0	6,5	6x60°

ER63C-ZIK.GL.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

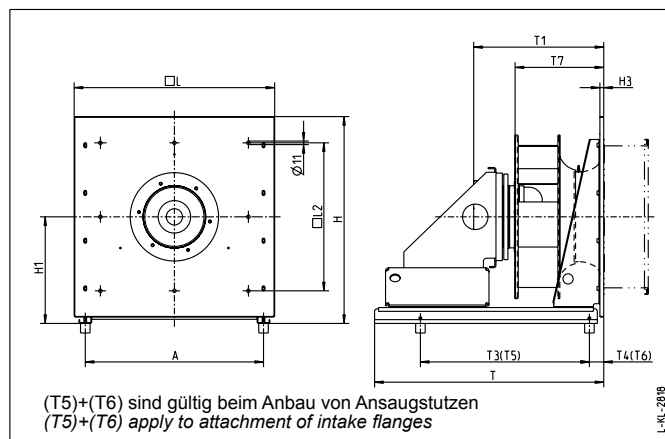


L-KL-2818

Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	H3	L	L2	T	T1	T3	T4	T5	T6	T7
ER63C-ZIK.GL.1R	114 112/A01	74	720	813	433	20	760	660	880	492	633	45	601	45	395

GR63C-ZIK.GL.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

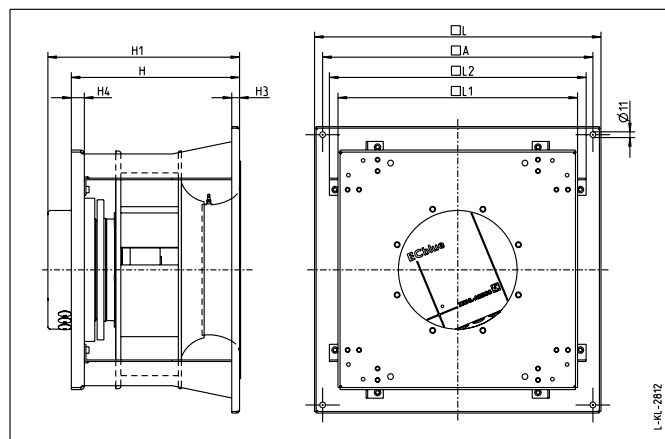

L-KL-2812


Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	H3	H4	L	L1	L2
GR63C-ZIK.GL.1R	114 072/H01	81	800	442	472	25	40	840	722	770

GR63C-ZIK.GL.1R

Einbaulage Motorwelle vertikal
Installation position vertical motor shaft

Lauftrad von oben ansaugend
Impeller at the top
Vo

Lauftrad von unten ansaugend
Impeller at the bottom
Vu

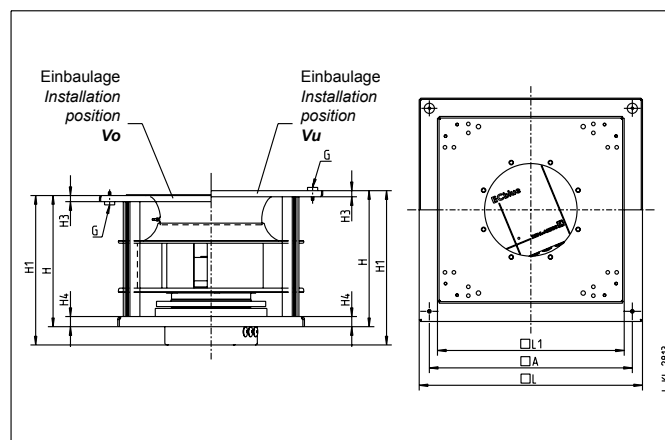

L-KL-2813

Ventilator-Typ Fan type	Artikel-Nr. Article no.			A	G ₋	H	H1	H3	H4	L	L1
GR63C-ZIK.GL.1R	114 072/O01	Vo	80	780	M8	442	472	25	40	840	722
GR63C-ZIK.GL.1R	114 072/U01	Vu	80	780	M8	463	493	25	40	840	722

RH..C-ECblue

RH63C-ZIK.GL.1R

Leistungsdaten Performance data


3~ 380...480V
50/60Hz IP54

Anschlussplan MOEA03K0
Connection diagram

P_1	3,7	kW
I	5,9-4,7	A
n	1320	min ⁻¹
t_R	55	°C


Kennliniendaten / Characteristic data

gemessen mit Volldüse / measured with full bell mouth

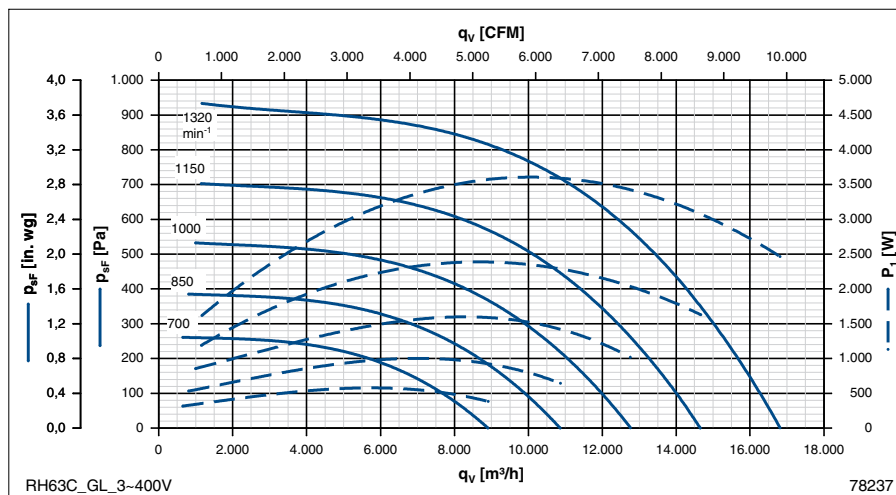


Artikel-Nr.
Article no.

Volldüse / Full bell mouth 00401301

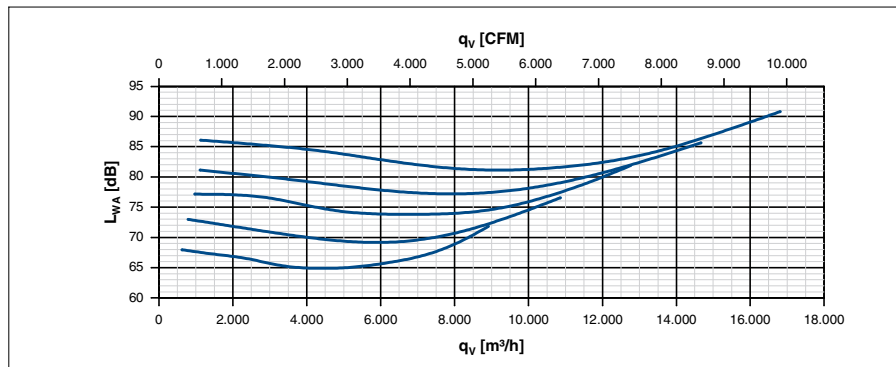

Abmessungen / Dimensions

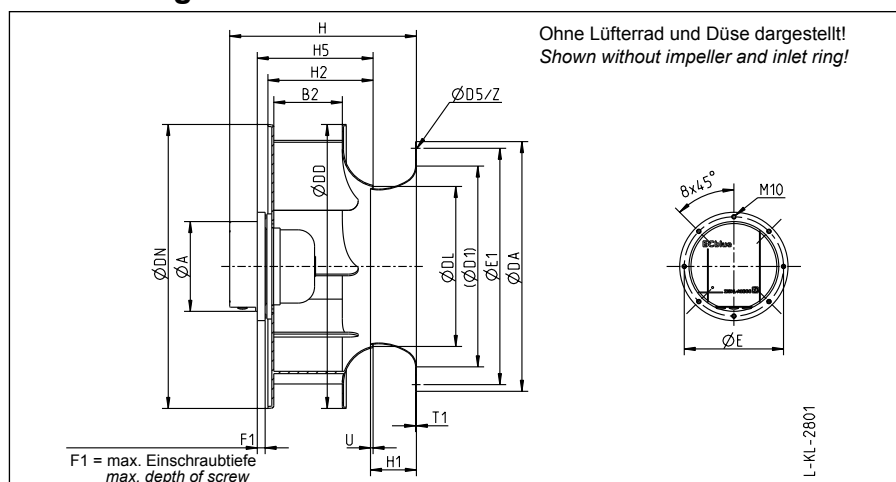

Einbaulagen Installation positions


Motorwelle horizontal
Horizontal motor shaft
H

Motorwelle vertikal
Vertical motor shaft
Vo Laufrad von oben ansaugend
Impeller at the top
Vu Laufrad von unten ansaugend
Impeller at the bottom

Ventilator-Typ Fan type	Artikel-Nr. Article no.	Controller	kg	A	B2	DA	DD	DL	DN	D1	D5	E	E1	F1	H	H1	H2	H5	T1	U	Z
RH63C-ZIK.GL.1R	113 998 113 999	Basic Premium	33	228	174	634	721	406	721	510	10,5	252	600	20	474	117	267	294	2,0	6,5	6x60°

ER63C-ZIK.GL.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

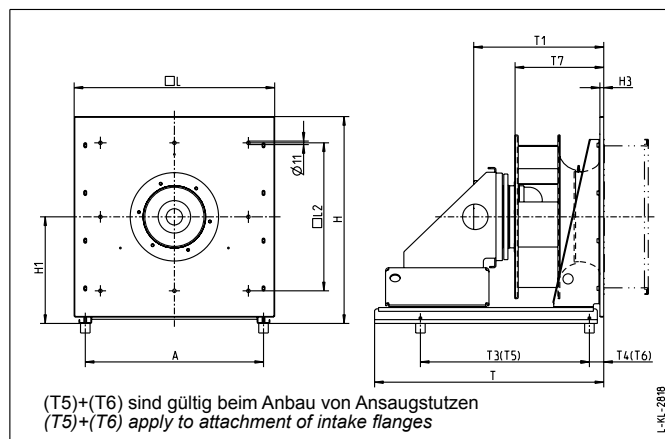


L-KL-2818

Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	H3	L	L2	T	T1	T3	T4	T5	T6	T7
ER63C-ZIK.GL.1R	114 110/A01	74	720	813	433	20	760	660	880	492	633	45	601	45	395

GR63C-ZIK.GL.1R

Einbaulage Motorwelle horizontal
Installation position horizontal motor shaft
H

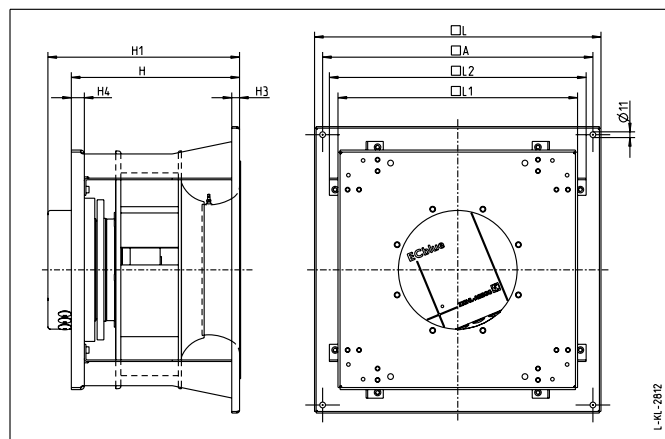

L-KL-2812


Ventilator-Typ Fan type	Artikel-Nr. Article no.	kg	A	H	H1	H3	H4	L	L1	L2
GR63C-ZIK.GL.1R	114 070/H01	81	800	442	472	25	40	840	722	770

GR63C-ZIK.GL.1R

Einbaulage Motorwelle vertikal
Installation position vertical motor shaft

Lauftrad von oben ansaugend
Impeller at the top
Vo

Lauftrad von unten ansaugend
Impeller at the bottom
Vu

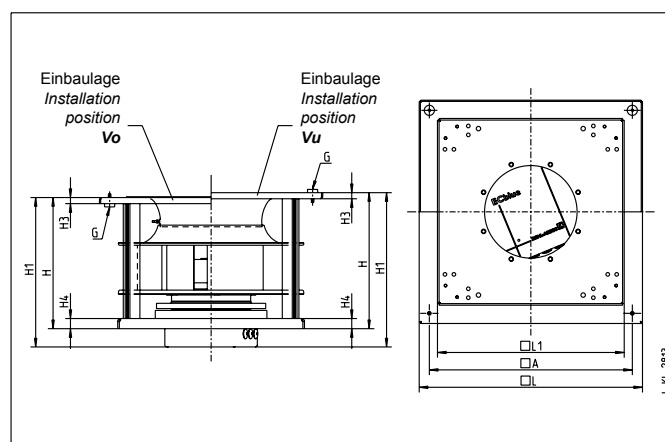

L-KL-2813

Ventilator-Typ Fan type	Artikel-Nr. Article no.			A	G ₋	H	H1	H3	H4	L	L1
GR63C-ZIK.GL.1R	114 070/O01	Vo	80	780	M8	442	472	25	40	840	722
GR63C-ZIK.GL.1R	114 070/U01	Vu	80	780	M8	463	493	25	40	840	722