


AL FAN
轴流风机

EC CENTRIFUGAL FAN
离心风机


EC SHADED-POLE MOTOR
罩极电机

AC AXIAL FAN
外转子轴流风机

AC CENTRIFUGAL FAN
离心风机

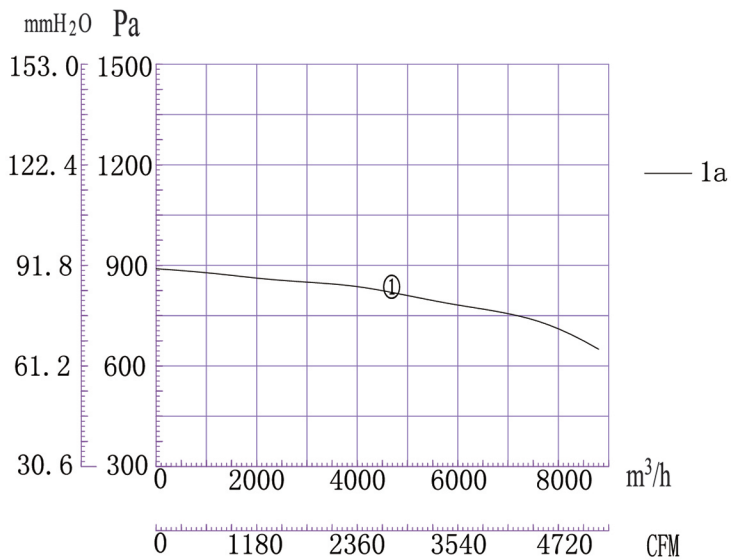



- 防护等级: IP54
- 绝缘等级: “B” “F”
- 工作方式: S1
- 轴承: 免维护轴承
- 叶片材质: 镀锌板
- 工作环境温度: -40°C-+60°C
- Type of Protection: IP54
- Insulation Class: “B”“F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: Galvanized sheet
- Perm.amb.temp.: -40°C - +60°C

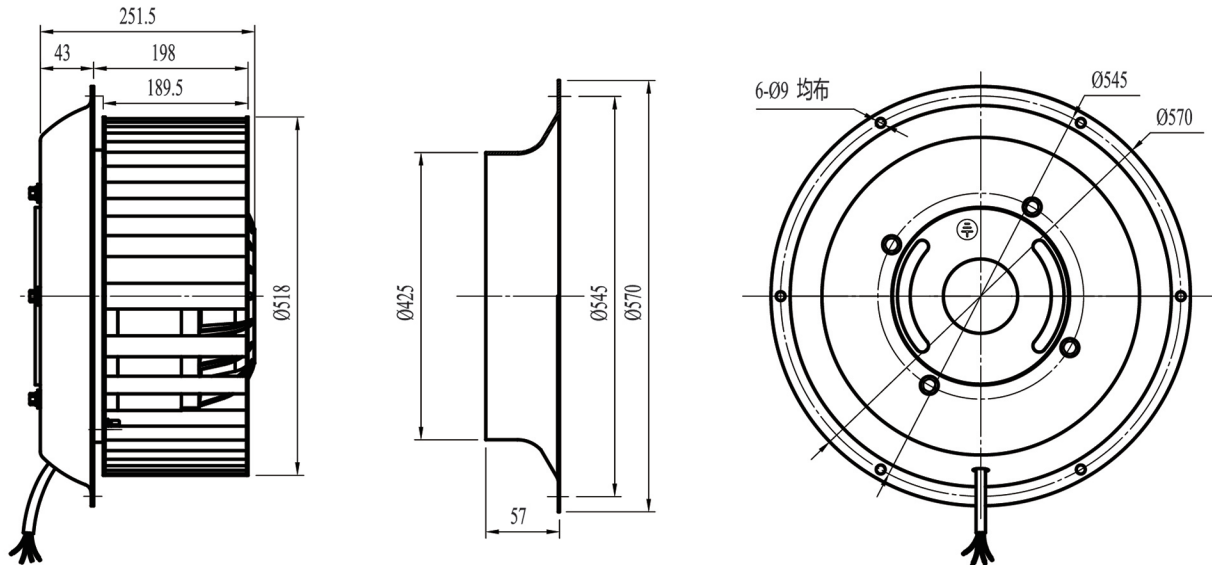

技术参数 Technical data											
型号 Model	曲线 Curve #	电压 Voltage V	频率 Frequency Hz	电流 Current draw A	额定功率 Rated power W	转速 Rated Speed r/min	噪音 Noise level dB(A)	电容 Capacitor μF	最大风量 Max.Air Volume m³/h	静压 Static Pressure ≥Pa	净重 N.W. Kg
DYF6D-500-QW1a	①	380/220	50	7.6/12.8	4400	900	75	/	8800	640	46



- 防护等级: IP54
- 绝缘等级: “B” “F”
- 工作方式: S1
- 轴承: 免维护轴承
- 叶片材质: PP或镀锌板
- 工作环境温度: -40°C-+60°C
- Type of Protection: IP54
- Insulation Class: “B”“F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: PP or Galvanized sheet
- Perm.amb.temp.: -40°C - +60°C

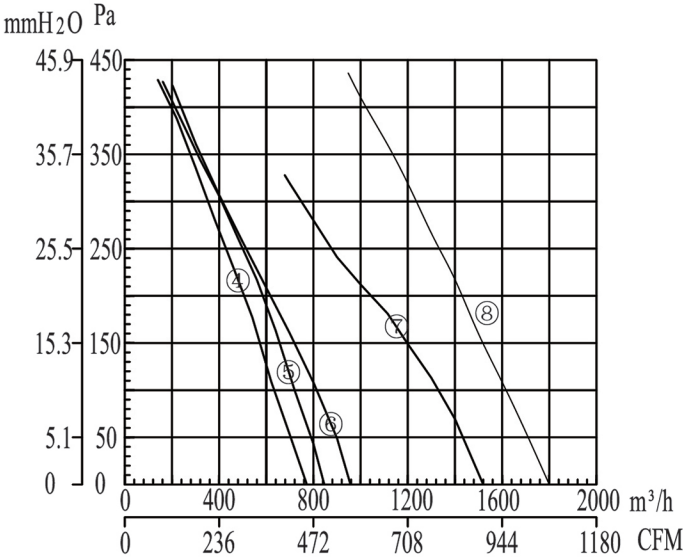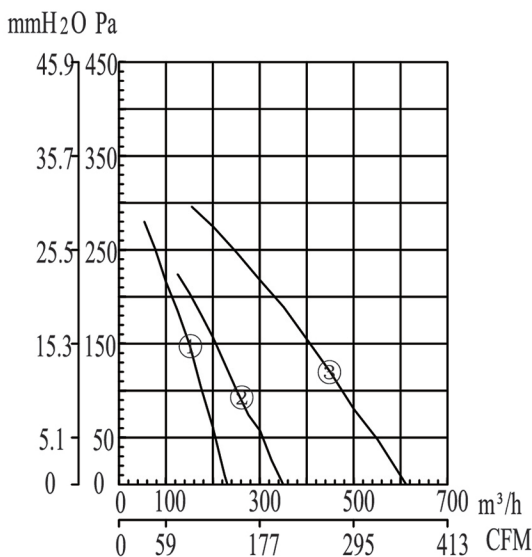

技术参数 Technical data										
型 号 Model	曲线 Curve #	电压 Voltage V	频 率 Frequency Hz	额定电流 Current A	输入功率 Input Power W	转速 Speed rpm	噪音 Noise level dB(A)	电容 Capacitance uF	最大风量 Max.air volume m³/h	净 重 N.W. Kg
DYF2E-100-HG1a	①	220	50	0.31	72	2650	48	4	230	3
DYF2E-125-HG1a	②	220	50	0.34	78	2600	49	4	350	3
DYF2E-150-HG1a	③	220	50	0.47	108	2550	51	3	610	5
DYF2E-160-HG1a	④	220	50	0.79	170	2580	51	6	770	5
DYF2E-200-HG1a	⑤	220	50	0.73	157	2630	52	6	845	6
DYF2E-250-HG1a	⑥	220	50	0.67	140	2600	55	8	950	6.5
DYF2E-315-HG1a	⑦	220	50	1.1	248	2530	57	10	1520	8
DYF2E-315M-HG1a	⑧	220	50	2.0	465	2600	65	10	1800	11

AL FAN
轴流风机

EC CENTRIFUGAL FAN
离心风机

EC SHADED-POLE MOTOR
罩极电机

AC AXIAL FAN
外转子轴流风机

AC CENTRIFUGAL FAN
离心风机

轴流风机
AL FAN


EC 离心风机
EC CENTRIFUGAL FAN

EC 罩极电机
EC SHADED-POLE MOTOR


AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN

安装尺寸图 Mounting dimensions

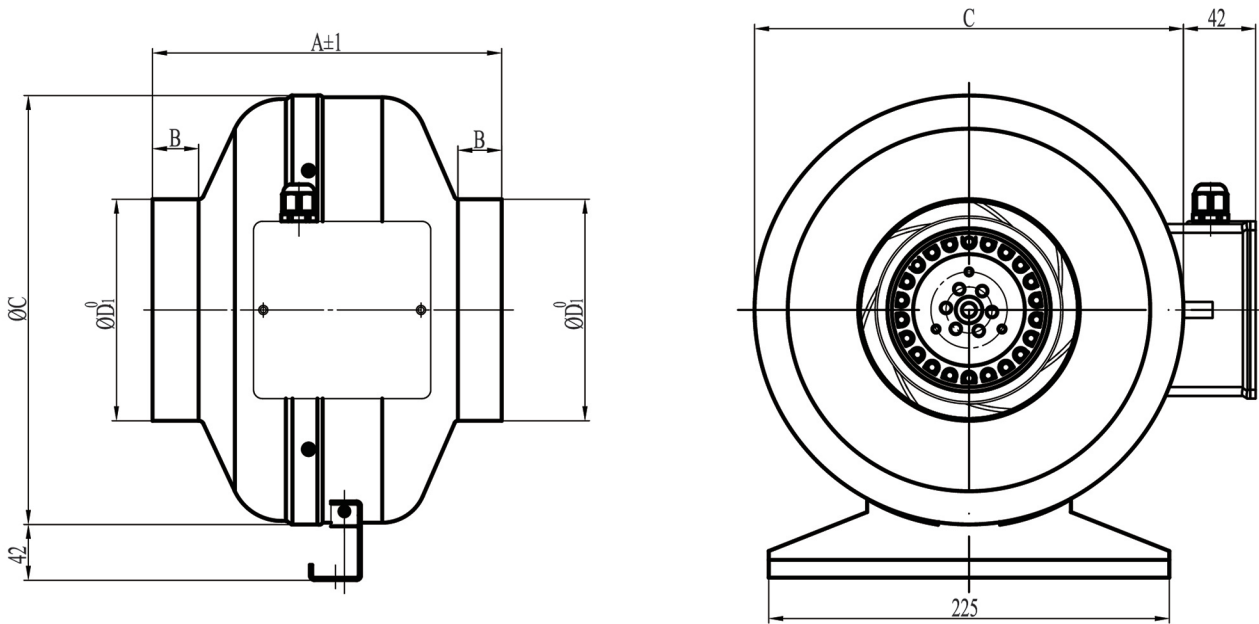

支架安装孔尺寸： Bracket Mounting Hole Dimensions:

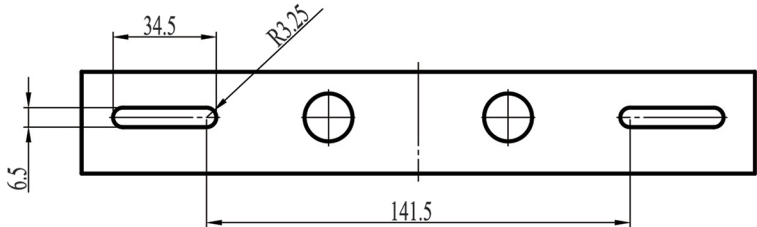

型号 Model	A	B	Ø C	Ø D
DYF2E-100-HG1a	195	23	242	100
DYF2E-125-HG1a	197	26	242	125
DYF2E-150-HG1a	234	25	332	150
DYF2E-160-HG1a	234	26	332	160
DYF2E-200-HG1a	229	25	332	200
DYF2E-250-HG1a	211	25	332	250
DYF2E-315-HG1a	258	28	402	315