




ErP2015
EXCEEDS THE NORM

轴承类型 (Bearing): Maintenance Free Ball Bearing

型 号 Model	额 定 电 压 Rated Voltage	频 率 Frequency	转 速 Speed	输入功率 Input Power	电 流 Current	噪 音 Noise	使用温度 Applicable Temp
	VAC	Hz	RPM	W	A	dB	℃
EC137-B450	3~380	50/60	1560	820	1.7	74	-20~+60

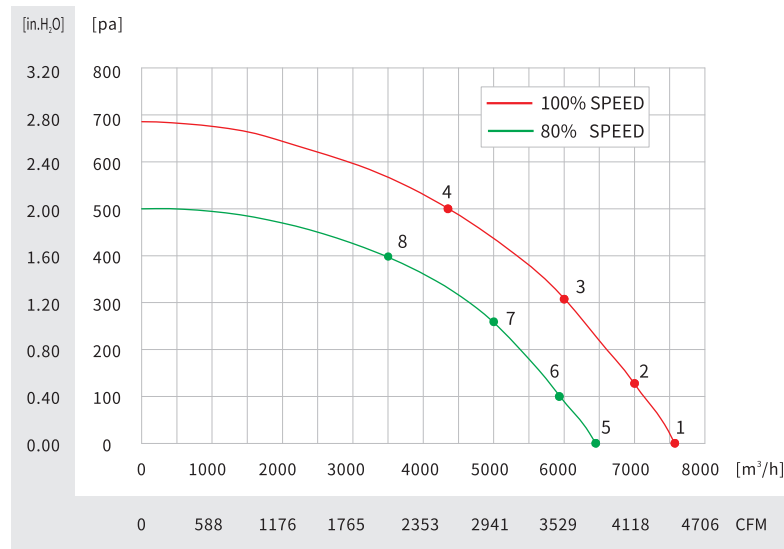

No.	转 速 Speed	输入功率 Input Power
	[RPM]	[W]
1	1557	847.3
2	1559	952.9
3	1556	1129.5
4	1558	1107.4
5	1336	535.4
6	1335	607.7
7	1333	738.5
8	1333	690.5

