

Technical Data


Impeller Data

Impeller diameter	D_r	510	mm
Number of blades	z	6	
Moment of Inertia	J	0.6	kgm ²

Impeller Data

Impeller weight	m	15	kg
Density of media	ρ_1	1.2	kg/m ³
Tolerance class (DIN 24166)		1	

Technical Data

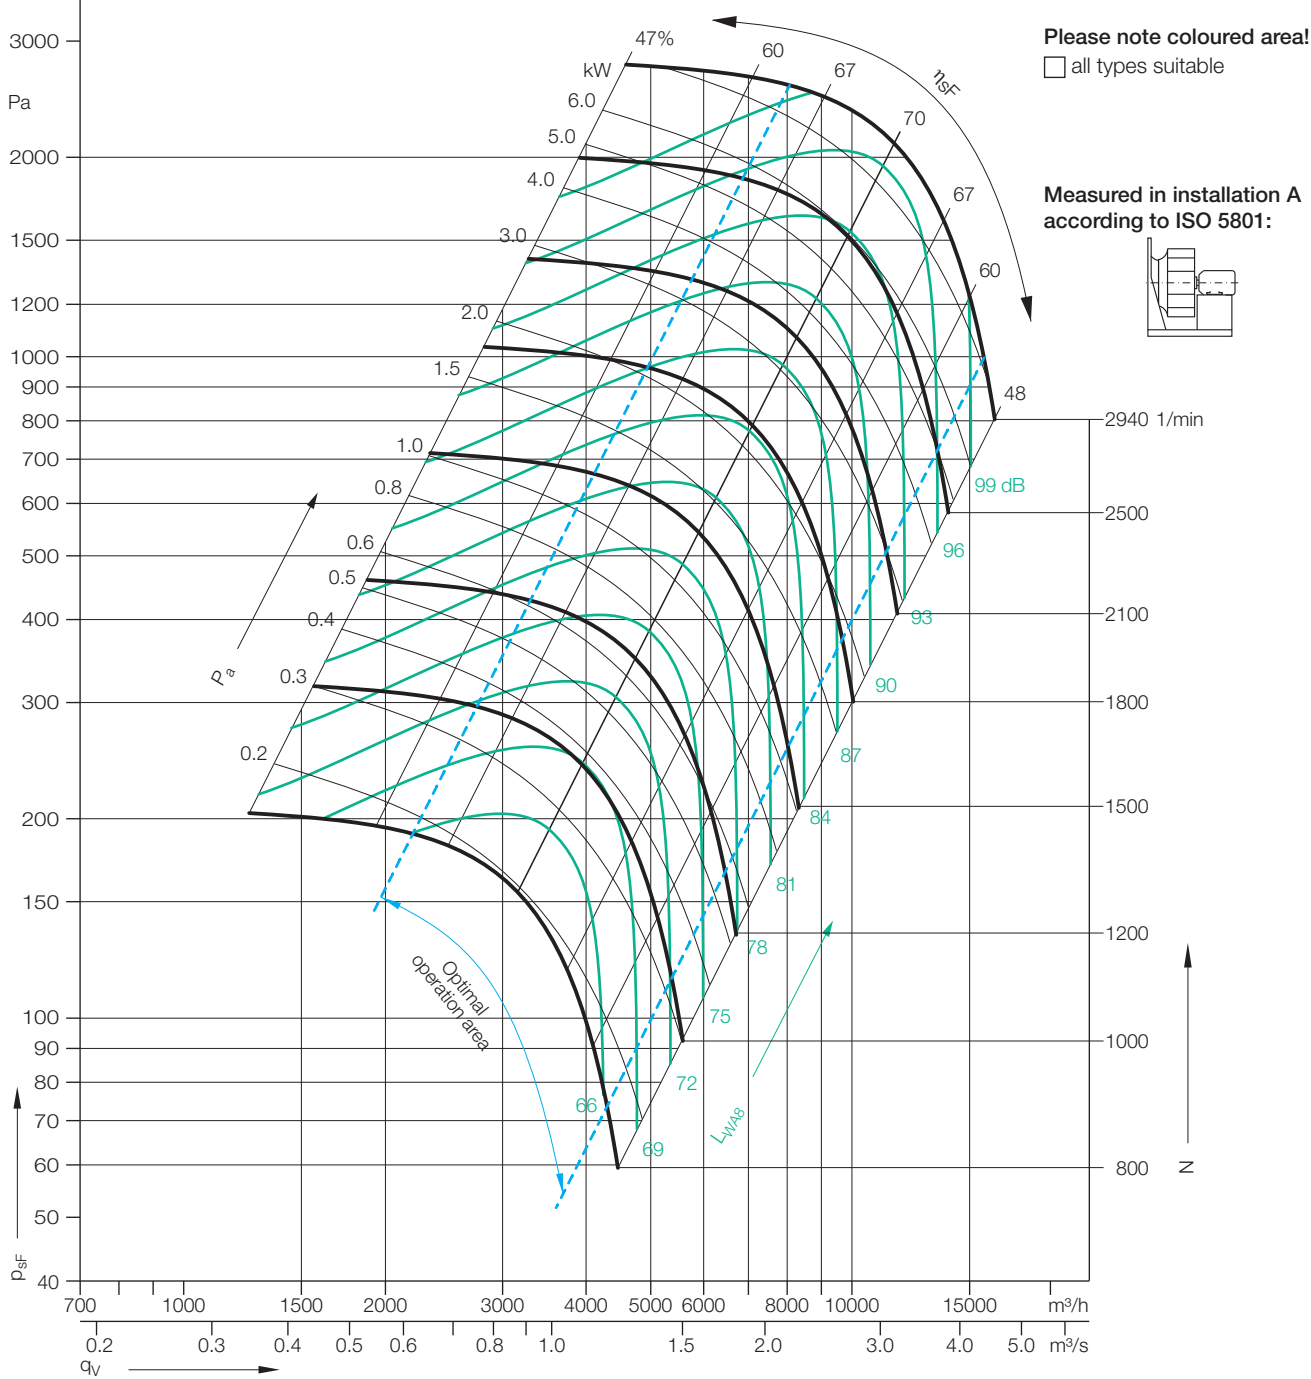

Оформить
Заказ

RLM ..-4550

Technical Data


	Nominal motor power	Poles	Motor size	Motor voltage	Nominal fre- quency	Connection	Nominal motor current	Nominal motor speed	Max. fan speed	Max. operating frequency	Weight
RLM 56-	kW	—		V	Hz		A	1/min	1/min	Hz	kg
4550-4D-14	1.50	4	90 L	230/400	50	Δ/Y	6.00/3.45	1420	1580	55	54
4550-4D-16	2.20	4	100 L	400	50	Δ	4.75	1425	1780	62	58
4550-4D-17	3.00	4	100 L	400	50	Δ	6.30	1425	1960	69	62
4550-4D-19	4.00	4	112 M	400	50	Δ	8.20	1435	2150	75	66
4550-4D-21	5.50	4	132 S	400	50	Δ	11.40	1450	2380	82	80
4550-4D-23	7.50	4	132 M	400	50	Δ	15.40	1450	2600	89	84
4550-2D-26	11.00	2	160 M	400	50	Δ	21.50	2920	2940	50	107

Technical Data

	Nominal motor power	Poles	Motor size	Motor voltage	Nominal fre- quency	Connection	Nominal motor current	Nominal motor speed	Max. fan speed	Max. operating frequency	Weight
RLM 56-Ex II 2G c IIB T4	kW	—		V	Hz		A	1/min	1/min	Hz	kg
4550-4Y-15-2G	1.50	4	90 Lb	230/400	50	Δ/Y	6.10	1420	1560	55	73
4550-4Y-16-2G	2.20	4	100 L	400	50	Δ	5.10	1420	1780	62	84
4550-4Y-17-2G	3.00	4	100 L	400	50	Δ	6.60	1415	1960	69	87
4550-4Y-19-2G	4.00	4	112 M	400	50	Δ	8.50	1435	2150	75	97
4550-4Y-21-2G	5.50	4	132 S	400	50	Δ	11.10	1450	2380	82	118
4550-4Y-23-2G	7.50	4	132 M	400	50	Δ	15.00	1450	2600	89	125

Dimensions in mm, subject to change.

RLM 56-4550

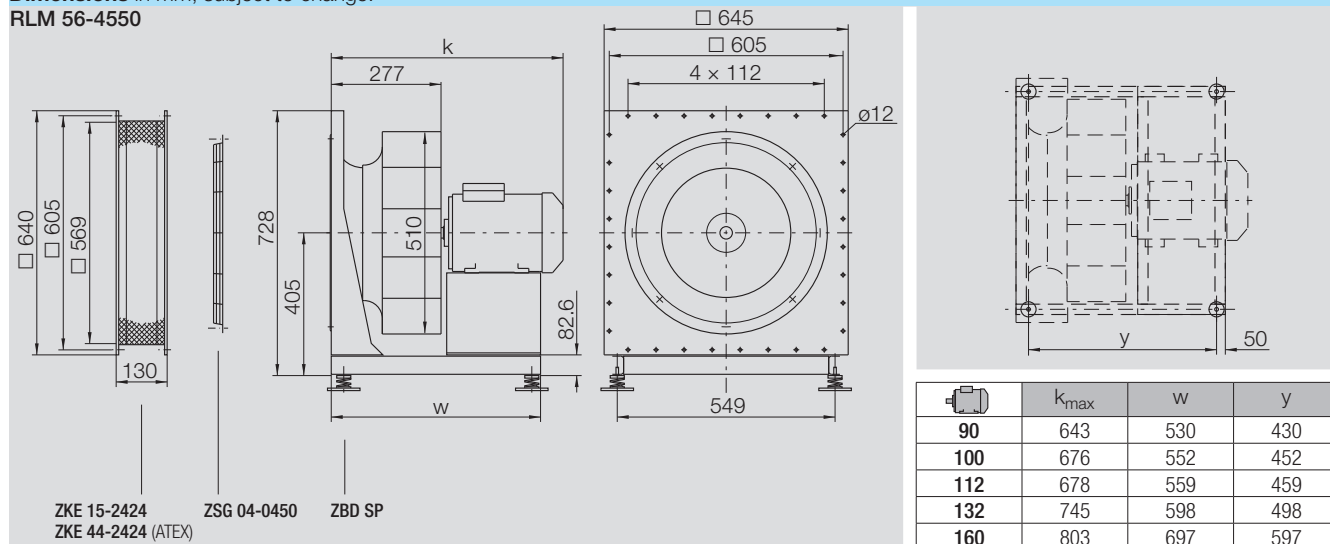

Accessories

Frequency Inverter Unit MM420
for 3~

Frequency Inverter Unit G110 for 1~ Line Choke for 3~

Line Choke for 1~

RLM 56-	Frequency Inverter Unit MM420 for 3~	Frequency Inverter Unit G110 for 1~	Line Choke for 3~	Line Choke for 1~
4550-4D-14	MM420 3AC 400V 1.50kW EMV B	G110 1AC 230V 1.50kW EMV B	6SE6400-3CC00-6AD3	6SE6400-3CC02-6BB3
4550-4D-16	MM420 3AC 400V 2.20kW EMV B	-	6SE6400-3CC01-0BD3	-
4550-4D-17	MM420 3AC 400V 3.00kW EMV B	-	6SE6400-3CC01-0BD3	-
4550-4D-19	MM420 3AC 400V 4.00kW EMV B	-	6SE6400-3CC01-4BD3	-
4550-4D-21	MM420 3AC 400V 5.50kW EMV B	-	6SE6400-3CC02-2CD3	-
4550-4D-23	MM420 3AC 400V 7.50kW EMV B	-	6SE6400-3CC02-2CD3	-
4550-2D-26	MM420 3AC 400V 11.0kW EMV B	-	6SE6400-3CC03-5CD3	-
RLM 56-Ex II 2G c IIB T4	Frequency Inverter Unit MM420 for 3~	Frequency Inverter Unit G110 for 1~	Line Choke for 3~	Line Choke for 1~
4550-4Y-15-2G	MM420 3AC 400V 1.50kW EMV B	G110 1AC 230V 1.50kW EMV B	6SE6400-3CC00-6AD3	6SE6400-3CC02-6BB3
4550-4Y-16-2G	MM420 3AC 400V 2.20kW EMV B	-	6SE6400-3CC01-0BD3	-
4550-4Y-17-2G	MM420 3AC 400V 3.00kW EMV B	-	6SE6400-3CC01-0BD3	-
4550-4Y-19-2G	MM420 3AC 400V 4.00kW EMV B	-	6SE6400-3CC01-4BD3	-
4550-4Y-21-2G	MM420 3AC 400V 5.50kW EMV B	-	6SE6400-3CC02-2CD3	-
4550-4Y-23-2G	MM420 3AC 400V 7.50kW EMV B	-	6SE6400-3CC02-2CD3	-



Оформить
Заказ

Ventilatorry.ru | zakaz@ventilatorry.ru | 8 (495) 133-95-09