


 Φ200

Φ 200 系列前倾离心风机

Φ 200 Series Forward Centrifugal Fan

- 材 质：风轮镀锌板、转子铸铝
- 保护等级: IP54
- 绝缘等级: F
- 轴 承：免维护滚珠球轴承




Material: Impeller: Steel Sheet Rotor: Aluminum Casting

Protection Class: IP54

Insulation Class: F

Bearing: Maintenance free ball bearing

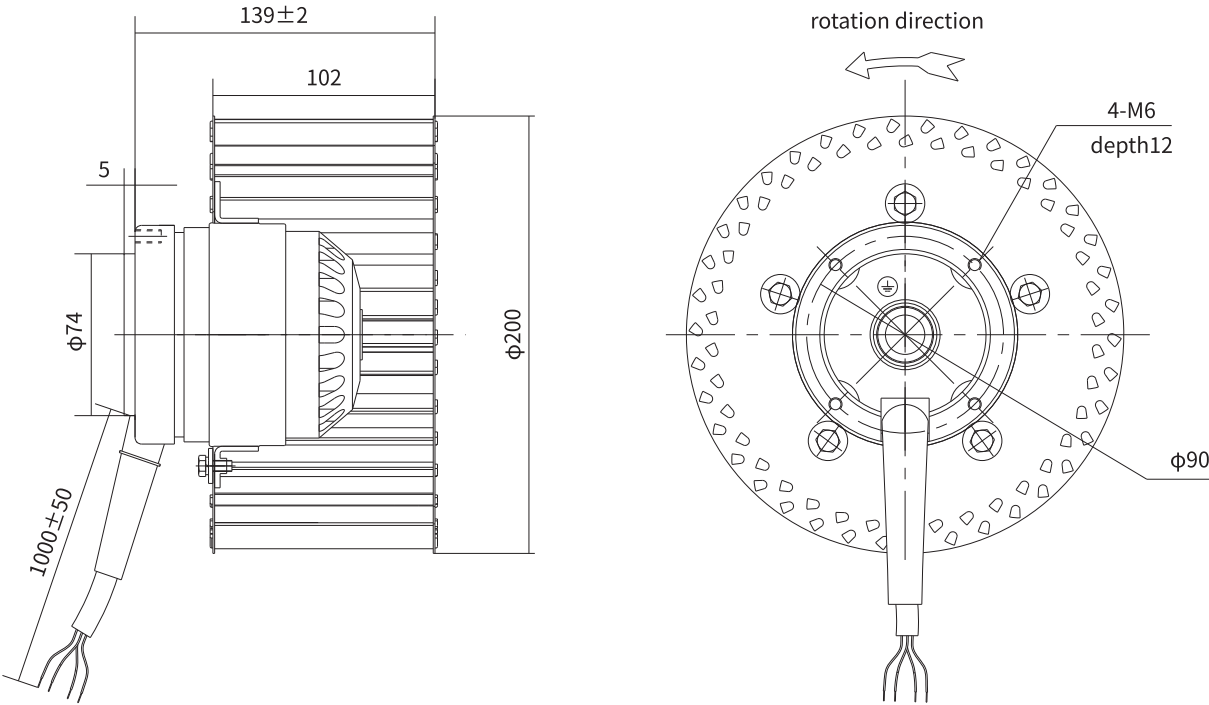


	电 压	频 率	电 流	输入功率	转 速	电 容	风 量	噪 音	曲 线	运行温度	认 证
Model No.	V	Hz	A	W	RPM	μF	m³/h/CFM	dB(A)	Curve No.	Operating Temperature	Approvals
YWF.F4S-200-102AX0A	115/120	50	1.30	125	1410	12	1200/706	59	①	-30/+60	RoHs
	115/120	60	1.40	160	1670	12	1380/812	63	②	-30/+60	RoHs
YWF.F4S-200-102AX00	220/230	50	0.63	120	1400	3.5	1200/706	59	①	-30/+60	CCC,CE,RoHs
	220/230	60	0.70	155	1610	3.5	1380/812	63	②	-30/+60	CE,RoHs
YWF.F4T-200-102AX00	380/400	50	0.29	105	1400	/	1200/706	59	①	-30/+60	CCC,CE,RoHs
	380/400	60	0.30	145	1600	/	1380/812	63	②	-30/+60	CE,RoHs

 Φ250

Φ 250 系列前倾离心风机

Φ 250 Series Forward Centrifugal Fan

- 材 质：风轮镀锌板、转子铸铝
- 保护等级: IP54
- 绝缘等级: F
- 轴 承：免维护滚珠球轴承




Material: Impeller: Steel Sheet Rotor: Aluminum Casting

Protection Class: IP54

Insulation Class: F

Bearing: Maintenance free ball bearing

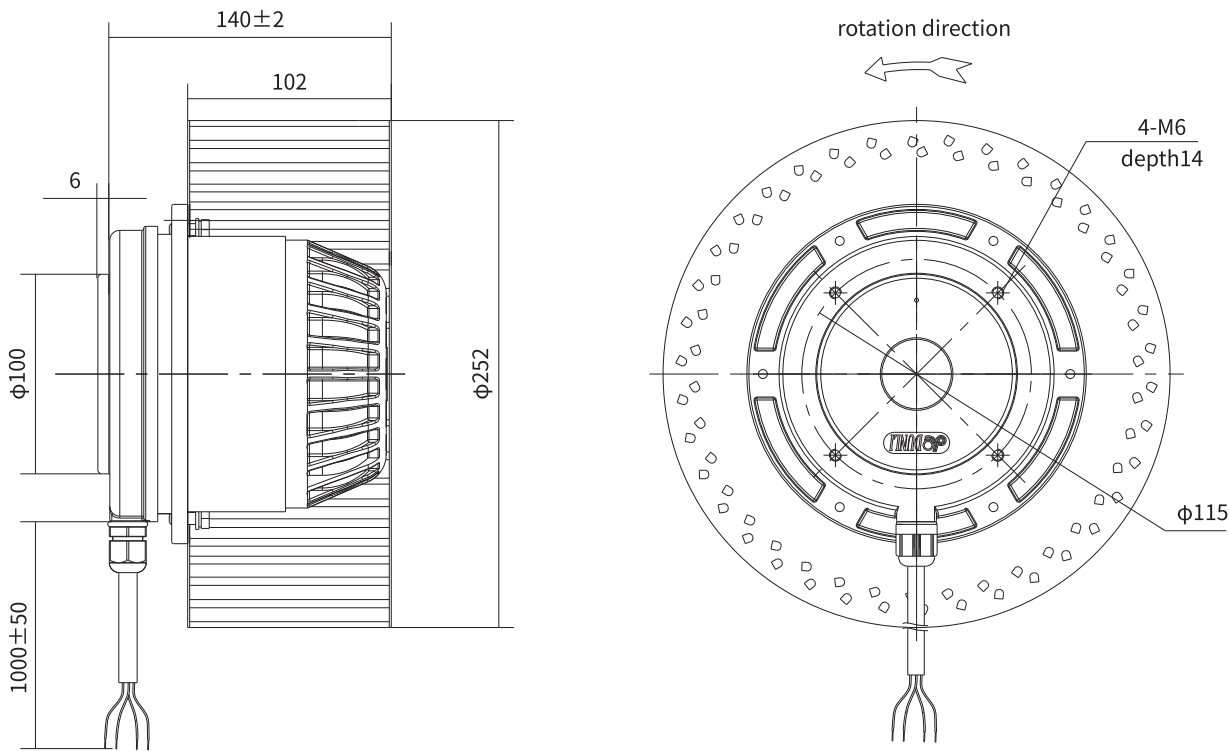

	电 压	频 率	电 流	输入功率	转 速	电 容	风 量	噪 音	曲 线	运行温度	认 证
Model No.	V	Hz	A	W	RPM	μF	m³/h/CFM	dB(A)	Curve No.	Operating Temperature	Approvals
YWF.F4S-250-102AX00	220/230	50	1.67	342	1450	16	2100/1235	72	①	-30/+60	CCC,CE,RoHs
	220/230	60	3.20	577	1680	16	1800/1059	74	②	-30/+60	CE,RoHs
YWF.F4T-250-102AX00	380/400	50	0.86	230	1450	/	2100/1235	72	①	-30/+60	CCC,CE,RoHs