

DDM 280/204

E6G3704 1F 4P 1V +SCT

Technical Data

	Speed control	Curves	Nominal motor power W	Poles	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 280/204 E6G3704										
1F 4P 1V +SCT	(2)	[F1]	600	4	1~		50	1603	6.9	1380

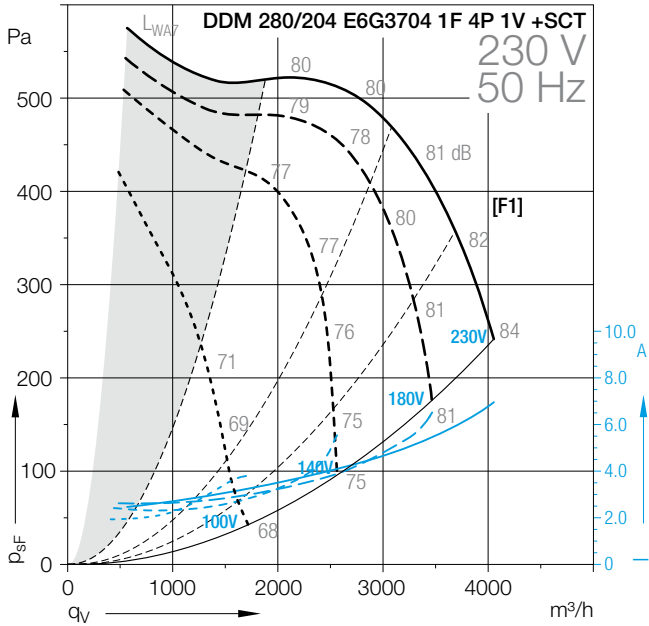
Technical Data

	Operating Capacitor μ F	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. $^{\circ}$ C	Fan weight kg	Density of media kg/m ³	Installation type (ISO 5801)	Article number
DDM 280/204 E6G3704										
1F 4P 1V +SCT	25	450	IP55	F	EXT	40	23	1.2	B	6102XE


(1) = Speed controllable via Transformer
(2) = Speed controllable via TRIAC or Transformer
(3) = Speed controllable via Inverter
* = No speed control available
[HI] High speed, [ME] Medium speed, [LO] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves



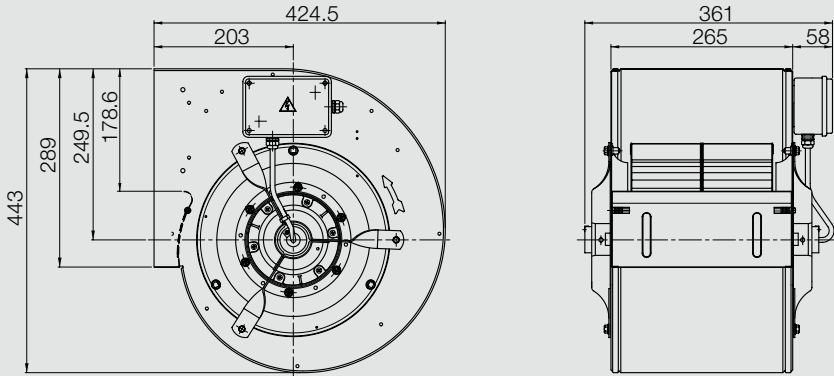Dimensions in mm. Subject to change.
DDM 280/204 E6G3704 1F 4P 1V +SCT



DDM 280/204**E6G3706 1F 4P 1V +SCT****Technical Data**

	Speed control	Curves	Nominal motor power W	Poles -	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 280/204 E6G3706										
1F 4P 1V +SCT	(1)	[F3]	750	4	3~	Δ/Y	50	1924	3.1	1370

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
DDM 280/204 E6G3706										
1F 4P 1V +SCT			IP55	F	EXT	40	23	1.2	B	6M02121

(1) = Speed controllable via Transformer

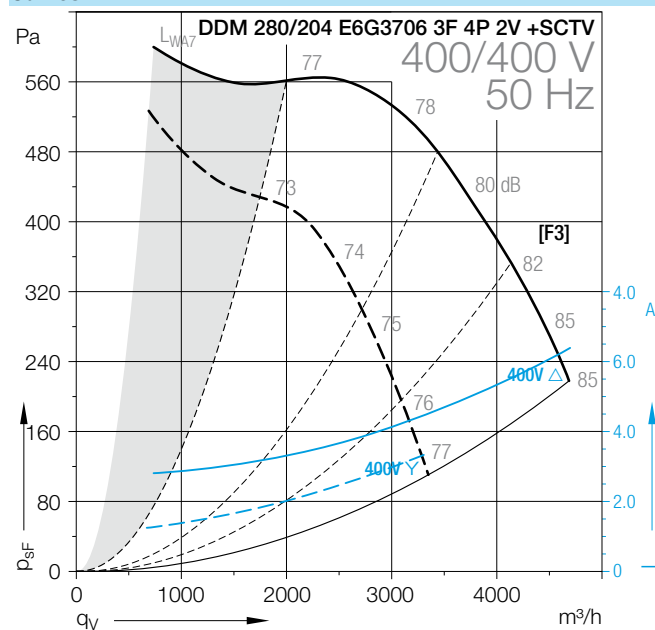
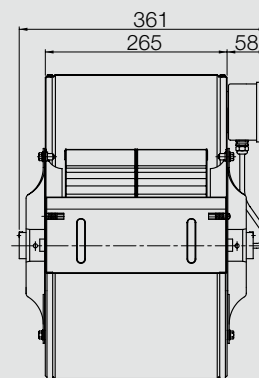
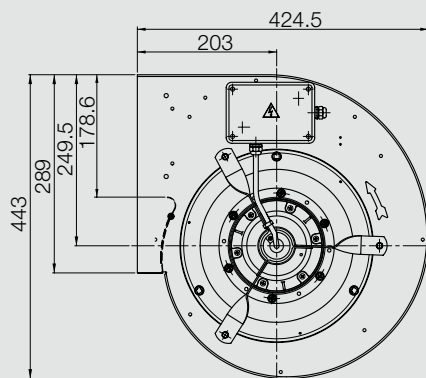
(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter

* = No speed control available

[H] High speed, [ME] Medium speed, [L] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves**Dimensions** in mm, Subject to change.**DDM 280/204 E6G3706 1F 4P 1V +SCT**
**Оформить
Заказ**

 Ventilatorry.ru | zakaz@ventilatorry.ru | 8 (495) 133-95-09