


轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 离心风机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN



AC 离心风机
AC CENTRIFUGAL FAN

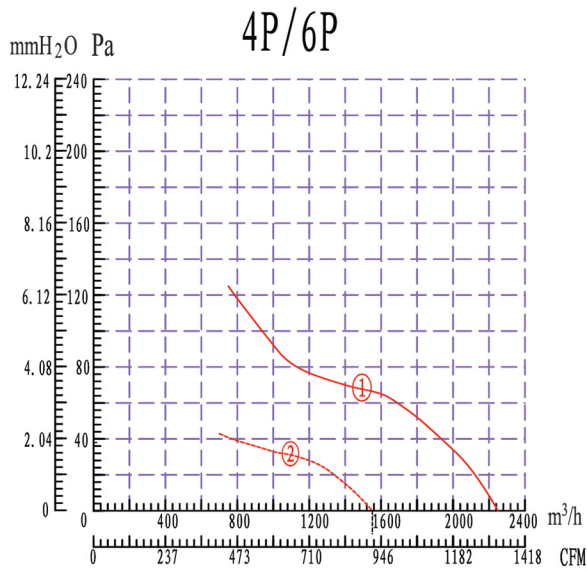

- 防护等级：IP54
 - 绝缘等级：“B” “F”
 - 工作方式：S1
 - 轴承：免维护轴承
 - 叶片材质：钢板
 - 工作环境温度：-40°C-+60°C
- Type of Protection: IP54
 - Insulation Class: “B”“F”
 - Mode of Operation: S1
 - Bearings: Maintenance-free ball bearings
 - Blades: steel plate
 - Perm.amb.temp.: -40°C - +60°C

- 防护等级：IP54
- 绝缘等级：“B” “F”
- 工作方式：S1
- 轴承：免维护轴承
- 叶片材质：钢板
- 工作环境温度：-40°C-+60°C

- Type of Protection: IP54
- Insulation Class: “B”“F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: steel plate
- Perm.amb.temp.: -40°C - +60°C

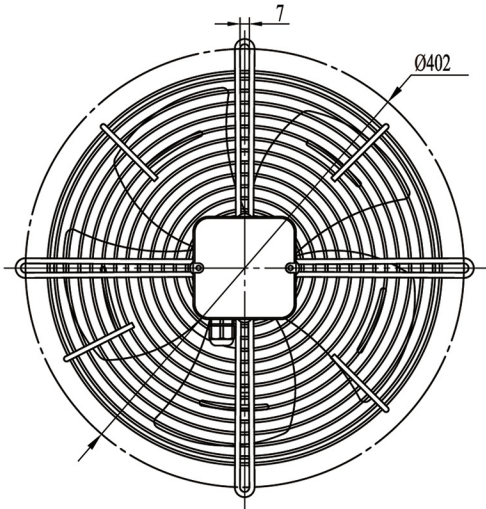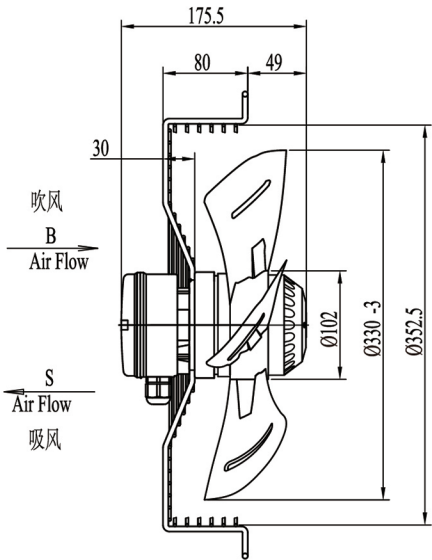

技术参数 Technical data

	曲线 Curve NO.	电压 Voltage	频率 Frequency	额定电流 Current	输入功率 Input Power	转速 Speed	噪音 Noise	电容 Capacitor	最大风量 / 许用静压 Air Volume / Max static pressure	净重 N.W
型号 MODEL	#	V	Hz	A	W	RPM	dB	μF	m³/h / Pa	Kg
YWF4D-330-E5L	①	380	50	0.4	125	1400	63	/	2250 / 95	4.5
YWF4E-330-E5L	①	220	50	0.6	125	1380	63	4	2250 / 95	4.5
YWF6D-330-E5L	②	380	50	0.3	85	950	52	/	1560 / 72	4.5

技术参数 Technical data

	曲线 Curve NO.	电压 Voltage	频率 Frequency	额定电流 Current	输入功率 Input Power	转速 Speed	噪音 Noise	电容 Capacitor	最大风量 / 许用静压 Air Volume / Max static pressure	净重 N.W
型号 MODEL	#	V	Hz	A	W	RPM	dB	μF	m³/h / Pa	Kg
YWF4D-350-E5L	①	380	50	0.45	150	1380	65	/	2350 / 90	4.6
	②	400	60	0.4	180	1600	68	/	2470 / 92	4.6
YWF4E-350-E5L	①	220	50	0.7	150	1380	65	4	2350 / 90	4.6
	③	230	60	0.8	180	1600	68	4	2470 / 92	4.6
YWF6D-350-E5L	④	380	50	0.42	105	955	52	/	2063 / 50	4.6
	⑤	400	60	0.32	106	1130	58	/	2479 / 55	4.6
YWF6E-350-E5L	⑥	220	50	0.41	82	935	52	2	1977 / 50	4.6
	⑦	230	60	0.44	96	1100	58	2	2358 / 55	4.6
YWF4E-350M-E5L	⑧	220	50	0.78	170	1380	70	6	2935 / 80	4.6
	⑨	230	60	1.2	250	1600	72	6	3080 / 82	4.6
YWF4D-350M-E5L	⑧	380	50	0.38	150	1390	72	/	2935 / 65	4.6
YWF6D-350M-E5L	⑩	380	50	0.28	80	950	58	/	2065 / 80	4.4
YWF6E-350M-E5L	⑩	220	50	0.4	95	950	58	4	2065 / 80	4.4
YWF4D-350G-E7L	⑪	400▲	50	0.36	190	1350	70	/	3100 / 75	6
	⑫	400Y	50	0.23	131	990	65	/	2600 / 40	6
YWF4E-350G-E7L	⑪	220	50	1.01	216	1400	71	5	3100 / 60	6
YWF6D-350T-E6L	⑬	380	50	0.27	90	920	60	/	1925 / 70	5.2
YWF6E-350T-E6L	⑬	220	50	0.47	100	900	60	/	1925 / 70	5.2
YWF4D-350F-E7F	⑭	380	50	0.39	180	1350	71	/	3150 / 100	5.0
	⑮	400	60	0.45	230	1550	73	/	3300 / 100	5.0
YWF4E-350F-E7F	⑭	220	50	0.75	170	1330	71	5	3150 / 100	5.0
	⑮	230	60	1.15	250	1600	73	5	3300 / 100	5.4
YWF6D-350F-E7F	⑯	400	60	0.26	110	1100	73	/	2000 / 60	5.0
YWF6E-350F-E7F	⑯	230	60	0.4	95	1050	73	2.5	2000 / 50	5.0

轴流风机
AL FAN

EC 离心风机
EC CENTRIFUGAL FAN

EC 离心风机
EC SHADED-POLE MOTOR

AC 外转子轴流风机
AC AXIAL FAN

AC 离心风机
AC CENTRIFUGAL FAN