

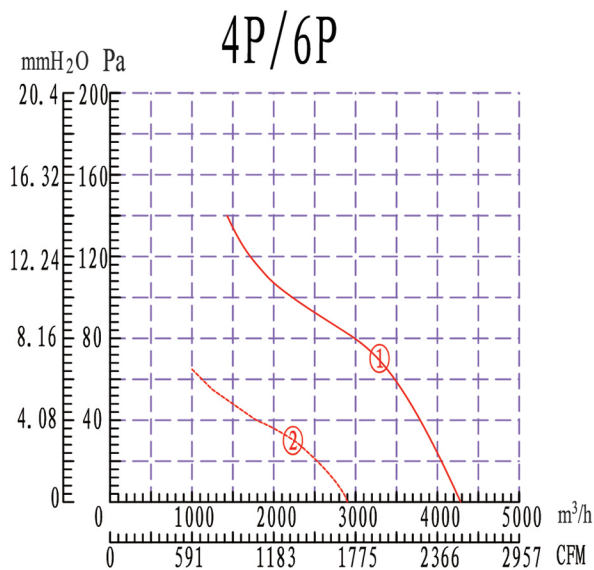


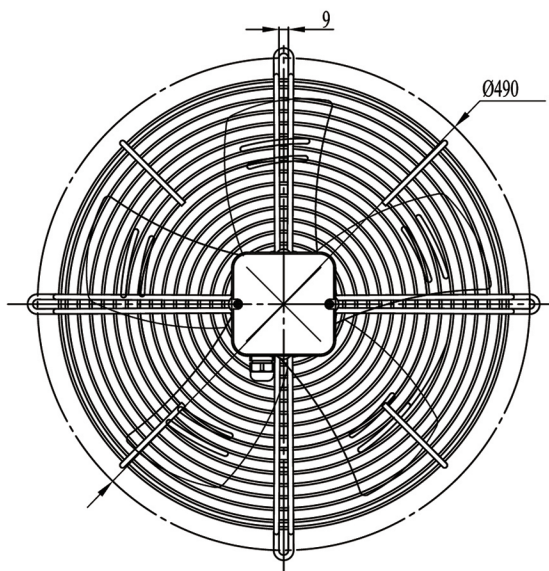

- 防护等级：IP54
 - 绝缘等级：“B” “F”
 - 工作方式：S1
 - 轴承：免维护轴承
 - 叶片材质：钢板
 - 工作环境温度：-40°C - +60°C
- Type of Protection: IP54
 - Insulation Class: “B”“F”
 - Mode of Operation: S1
 - Bearings: Maintenance-free ball bearings
 - Blades: steel plate
 - Perm.amb.temp.: -40°C - +60°C

- 防护等级：IP54
- 绝缘等级：“B” “F”
- 工作方式：S1
- 轴承：免维护轴承
- 叶片材质：钢板
- 工作环境温度：-40°C - +60°C


- Type of Protection: IP54
- Insulation Class: “B”“F”
- Mode of Operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: steel plate
- Perm.amb.temp.: -40°C - +60°C

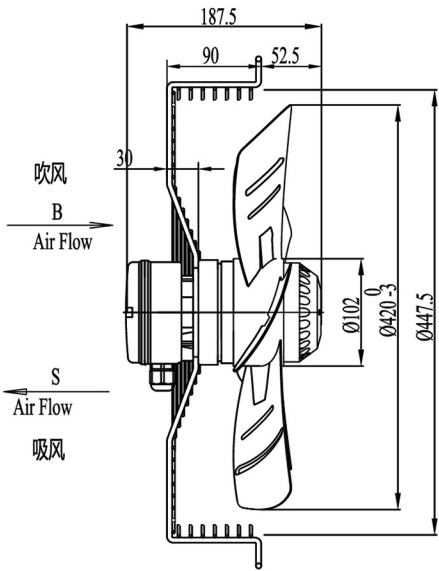

技术参数 Technical data

	曲线 Curve NO.	电压 Voltage	频率 Frequency	额定电流 Current	输入功率 Input Power	转速 Speed	噪音 Noise	电容 Capacitor	额定风量 / 许用静压 Air Volume / Max.static pressure	净重 N.W
型号 MODEL	#	V	Hz	A	W	RPM	dB	μF	m³/h / Pa	Kg
YWF4D-450-E5L	①	380	50	0.6	280	1365	70	/	4706 / 110	6.8
	②	400	60	0.6	330	1540	72	/	5522 / 115	6.8
YWF4E-450-E5L	①	220	50	1.15	270	1360	70	8	4706 / 110	6.8
	②	230	60	1.8	400	1500	72	10	5522 / 115	6.8
YWF6D-450-E5L	③	380	50	0.5	147	940	55	/	3680 / 60	6.8
	④	400	60	0.46	182	1090	58	/	4380 / 65	6.8
YWF6E-450-E5L	⑤	220	50	0.79	155	930	55	6	3608 / 60	6.8
	⑥	230	60	0.89	194	1090	58	6	4358 / 65	6.8
YWF4D-450M-E5L	⑦	380	50	0.7	320	1320	75	/	5890 / 120	6.8
	⑧	400	60	1.15	580	1400	77	/	6185 / 110	6.8
YWF4E-450M-E5L	⑦	220	50	2.2	460	1350	75	12	5890 / 120	6.8
	⑧	230	60	2.3	480	1680	77	12	6185 / 110	6.8
YWF4E-450G-E7L	⑨	220	50	2.93	640	1320	77	15	7380 / 100	10.5
	⑨	400▲	50	1.15	567	1370	77	/	7380 / 115	10.5
YWF4D-450G-E7L	⑩	400Y	50	0.73	400	1020	68	/	5700 / 50	10.5
	⑪	220	50	0.91	198	920	60	6	4800 / 50	10.2
YWF6D-450G-E7L	⑪	400▲	50	0.45	201	930	60	/	4800 / 50	10.2
YWF4D-450T-E7L	⑫	380	50	1.45	620	1370	72	/	6705 / 150	10.5
	⑬	380	50	0.75	230	935	60	/	5200 / 60	10
YWF6D-450T-E7L	⑭	400	60	0.70	290	1085	64	/	6000 / 65	10
	⑮	380	50	0.75	350	1320	75	/	5500 / 100	6.8
YWF4D-450F-E7F	⑯	380	50	0.86	395	1360	75	/	5940 / 100	10
YWF4D-450F-E7F	⑰	400	60	0.9	460	1600	77	/	5600 / 110	9.8
YWF4E-450F-E7F	⑮	220	50	1.85	400	1370	75	10	5550 / 100	10
YWF6D-450F-E7F	⑱	400	60	0.37	165	1070	64	/	3820 / 70	6.8
YWF6E-450F-E7F	⑲	230	60	0.69	150	1030	64	4	3680 / 60	6.8

技术参数 Technical data

	曲线 Curve NO.	电压 Voltage	频率 Frequency	额定电流 Current	输入功率 Input Power	转速 Speed	噪音 Noise	电容 Capacitor	额定风量 / 许用静压 Air Volume / Max static pressure	净重 N.W
型号 MODEL	#	V	Hz	A	W	RPM	dB	μF	m³/h / Pa	Kg
YWF4D-420S(B)-E5L	①	380	50	0.55	210	1350	68	/	4290 / 110	5.4
YWF6D-420S(B)-E5L	②	380	50	0.3	135	950	58	/	2900 / 65	5.4