




Plastic Airfoil Blade Axial Fan

ErP2015
EXCEEDS THE NORM

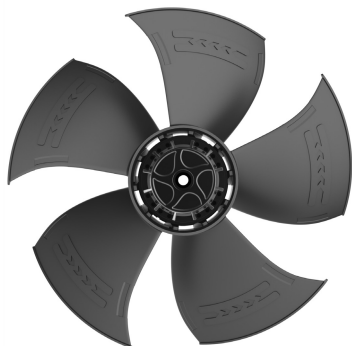

Φ 300

Rotor Material: Aluminum Die-casting


Impeller Material: Plastic

Ingress Protection: IP44

Insulation Class: F


Bearing Type: Maintenance Free Ball Bearing

Performance Curves

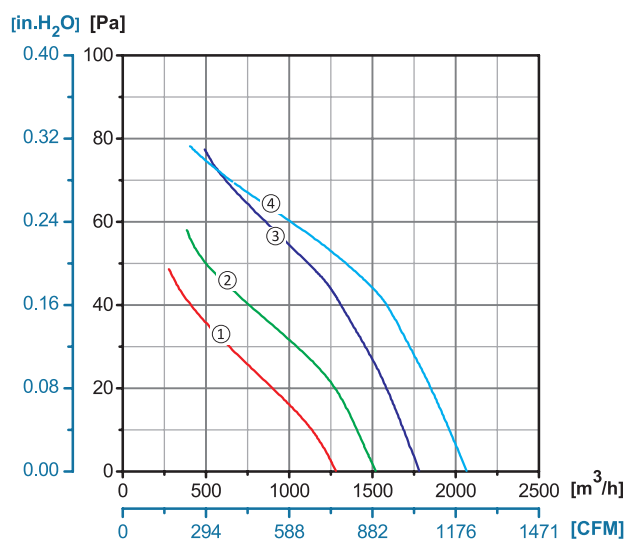


				
Type B	Type C	Type D	Type E	Type F0
YWF.A4S-300S-5B AP0	YWF.A4S-300S-5C AP0	YWF.A4S-300S-5D AP0	YWF.A4S-300S-5E AP0	YWF.A4S-300S-5F AP0
YWF.A4T-300S-5B AP0	YWF.A4T-300S-5C AP0	YWF.A4T-300S-5D AP0	YWF.A4T-300S-5E AP0	YWF.A4T-300S-5F AP0
YWF.A6S-300S-5B AP0	YWF.A6S-300S-5C AP0	YWF.A6S-300S-5D AP0	YWF.A6S-300S-5E AP0	YWF.A6S-300S-5F AP0


Type B

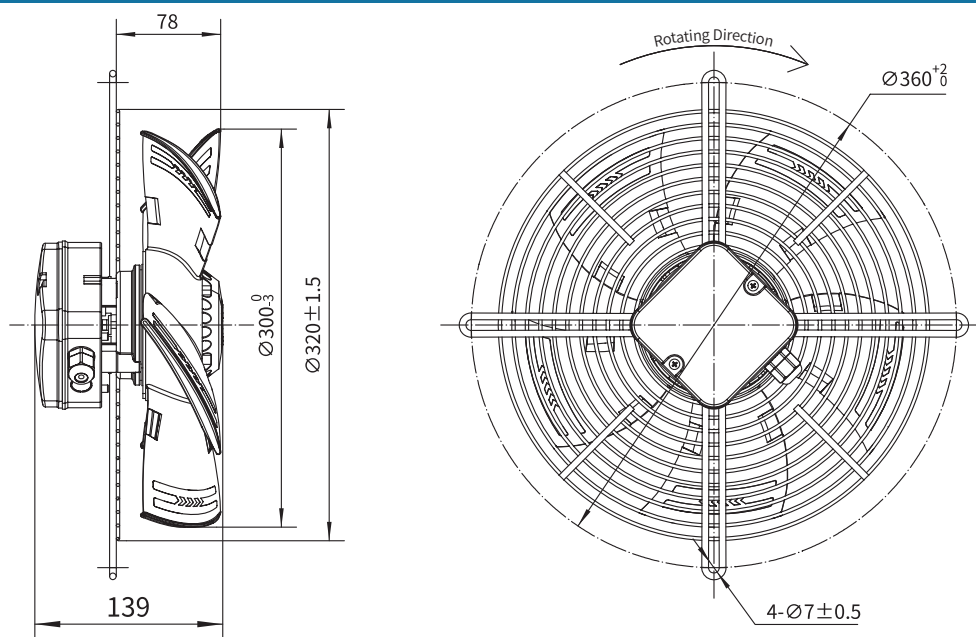

Type C

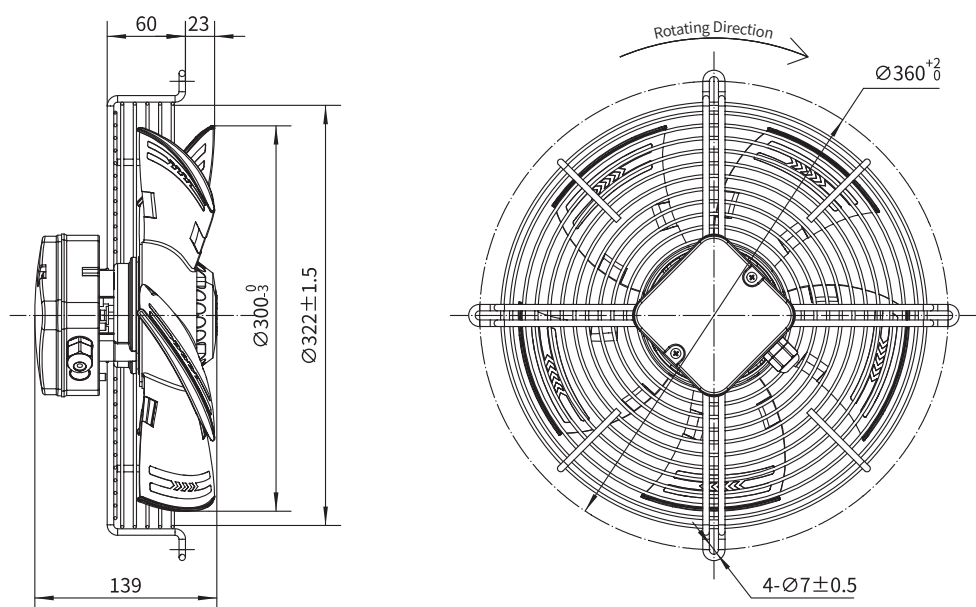

	Voltage	Frequency	Current	Power	Speed	Capacitor	Air Flow (0 Pa)	Noise	Curve	Working Temp.	Approvals
Type F1	V	Hz	A	W	RPM	µF	[m³/h]/[CFM]	dB(A)	No.	Min/Max(°C)	
/	220/230	50	0.28	65	1320	2	1780/1050	53	③	-30/+60	CCC, CE
	220/230	60	0.32	77	1485	2	2065/1215	56	④	-30/+60	CCC, CE
/	220/230	50	0.17	70	1350	/	1740/1025	55	③	-30/+60	CCC, CE
	220/230	60	0.16	80	1500	/	1970/1160	58	④	-30/+60	CCC, CE
/	220/230	50	0.24	50	920	2	1280/755	48	①	-30/+60	CCC, CE
	220/230	60	0.24	55	1080	2	1520/895	53	②	-30/+60	CCC, CE

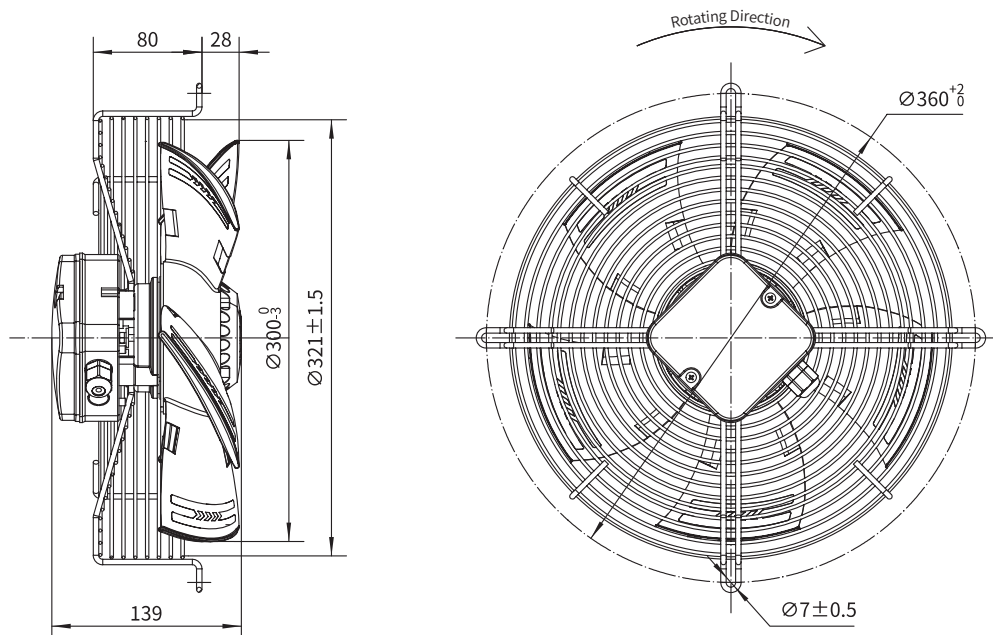**Type D**

**Plastic Airfoil Blade Axial Fan****Φ 300**

Type F0

