

Φ350-5


ErP2015
EXCEEDS THE NORM

Φ 350-5 系列轴流风机
Φ 350-5 Series Axial Fan


材 质：转子铸铝、叶轮塑料PP+GF
Material: Rotor: Aluminum Casting Impeller: PP Plastic
保护等级: IP54
Protection Class: IP54
绝缘等级: F
Insulation Class: F
轴 承: 免维护滚珠球轴承
Bearing: Maintenance Free Ball Bearing



4-pole

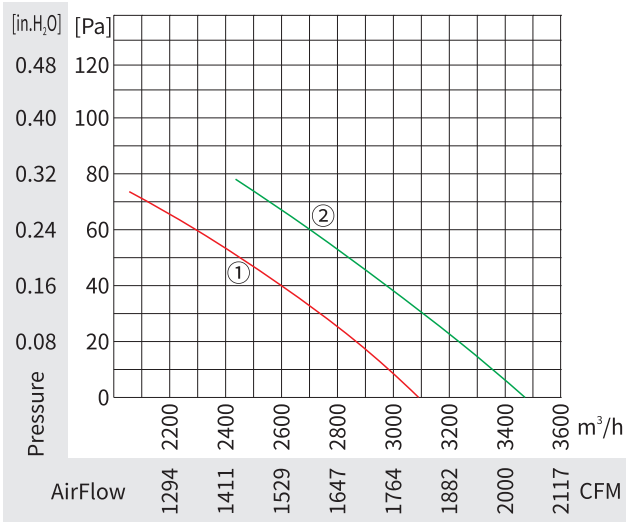



6-pole

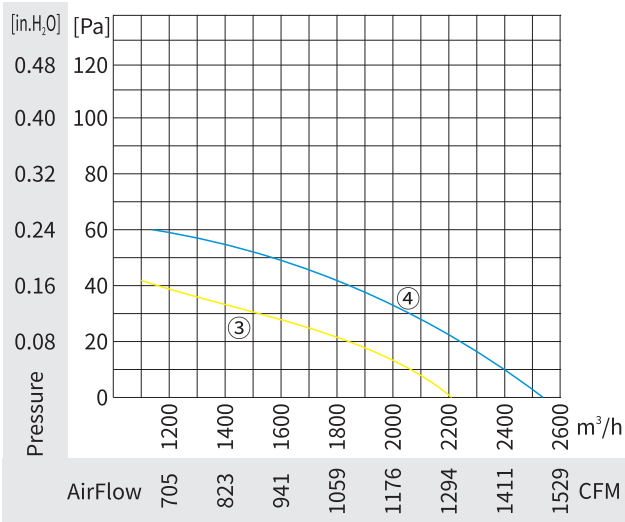



 B型网罩	 C型网罩	 E型导风筒	 G型网罩	 F型正扣面板	 F型反扣面板
Model No.B	Model No.C	Model No.E	Model No.G	Model No.F0	Model No.F1
YWF.A4S-350S-5BIAP0	YWF.A4S-350S-5CIAP0	YWF.A4S-350S-5EIAPO	YWF.A4S-350S-5GIAP0	YWF.A4S-350S-5FIAP0	/
YWF.A4T-350S-5BIAP0	YWF.A4T-350S-5CIAP0	YWF.A4T-350S-5EIAPO	YWF.A4T-350S-5GIAP0	YWF.A4T-350S-5FIAP0	/
YWF.A6S-350S-5BIAP0	YWF.A6S-350S-5CIAP0	YWF.A6S-350S-5EIAPO	YWF.A6S-350S-5GIAP0	YWF.A6S-350S-5FIAP0	/
YWF.A6T-350S-5BIAP0	YWF.A6T-350S-5CIAP0	YWF.A6T-350S-5EIAPO	YWF.A6T-350S-5GIAP0	YWF.A6T-350S-5FIAP0	/

Φ350-5

Model No.D

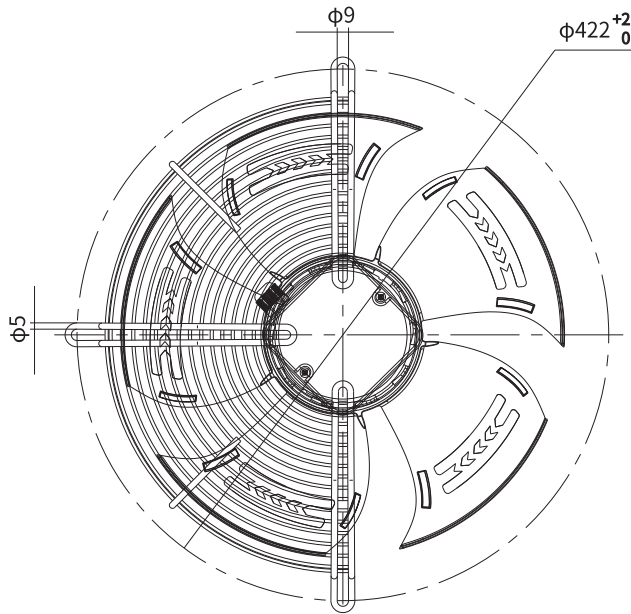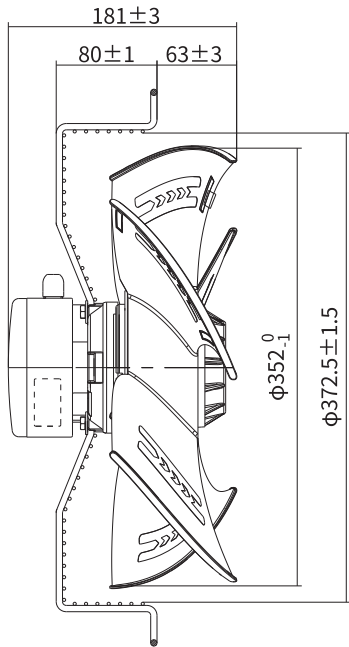


Model No.B

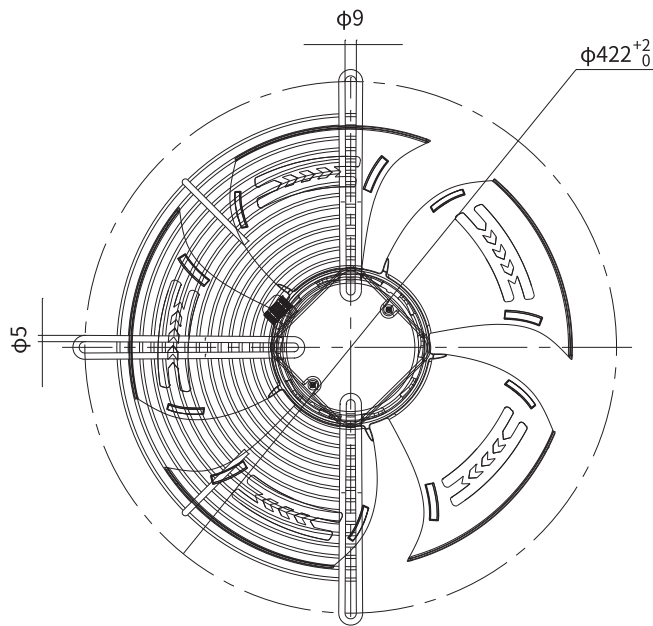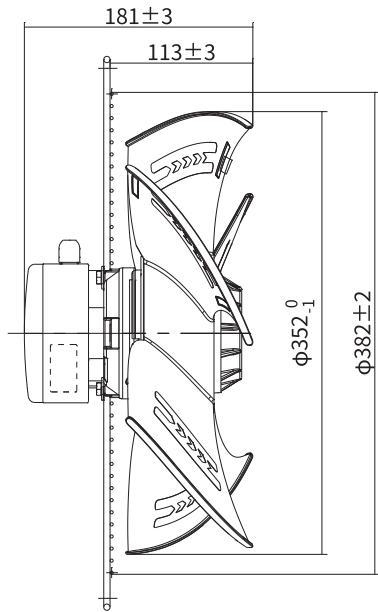


 D型网罩	电压 Voltage	频率 Frequency	电流 Current	输入功率 Input Power	转速 Speed	电容 Capacitor	风量 Air Flow(OPa)	噪音 Noise	曲线 Curve No.	运行温度 Operating Temperature	认证 Approvals
Model No.D	V	Hz	A	W	RPM	μF	m³/h/CFM	dB(A)	#	Min/Max(°C)	
YWF.A4S-350S-5DIAP0	220/230	50	0.73	155	1380	4	3140/1845	60	①	-30 / +60	CCC,CE,RoHs
		60	0.94	215	1500		3600/2120	63	②		CCC,CE,RoHs
YWF.A4T-350S-5DIAP0	380/400	50	0.37	150	1370	/	3060/1800	60	①	-30 / +60	CCC,CE,RoHs
		60	0.38	200	1530		3470/2040	63	②		CCC,CE,RoHs
YWF.A6S-350S-5DIAP0	220/230	50	0.41	85	910	3	2080/1225	49	③	-30 / +60	CCC,CE,RoHs
		60	0.39	90	1060		2420/1425	53	④		CCC,CE,RoHs
YWF.A6T-350S-5DIAP0	380/400	50	0.21	75	920	/	2200/1295	54	③	-30 / +60	CCC,CE,RoHs
		60	0.20	90	1050		2540/1495	56	④		CCC,CE,RoHs

Φ350-5

Model No.C

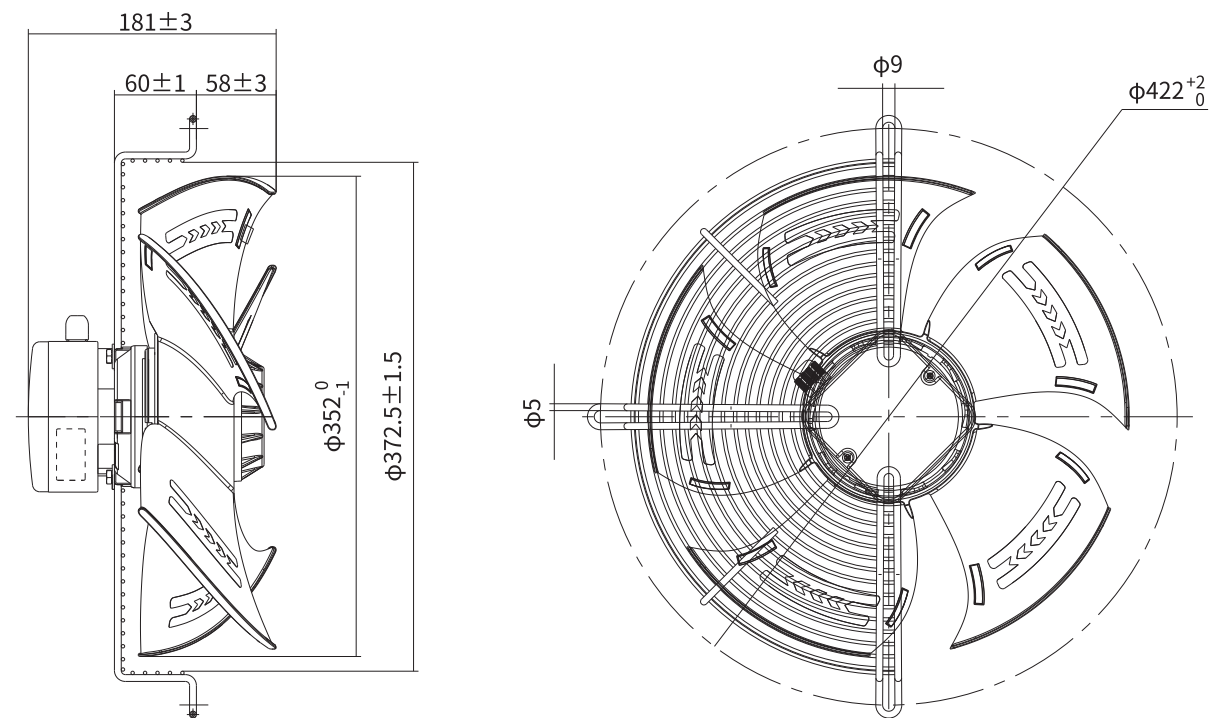


Model No.G

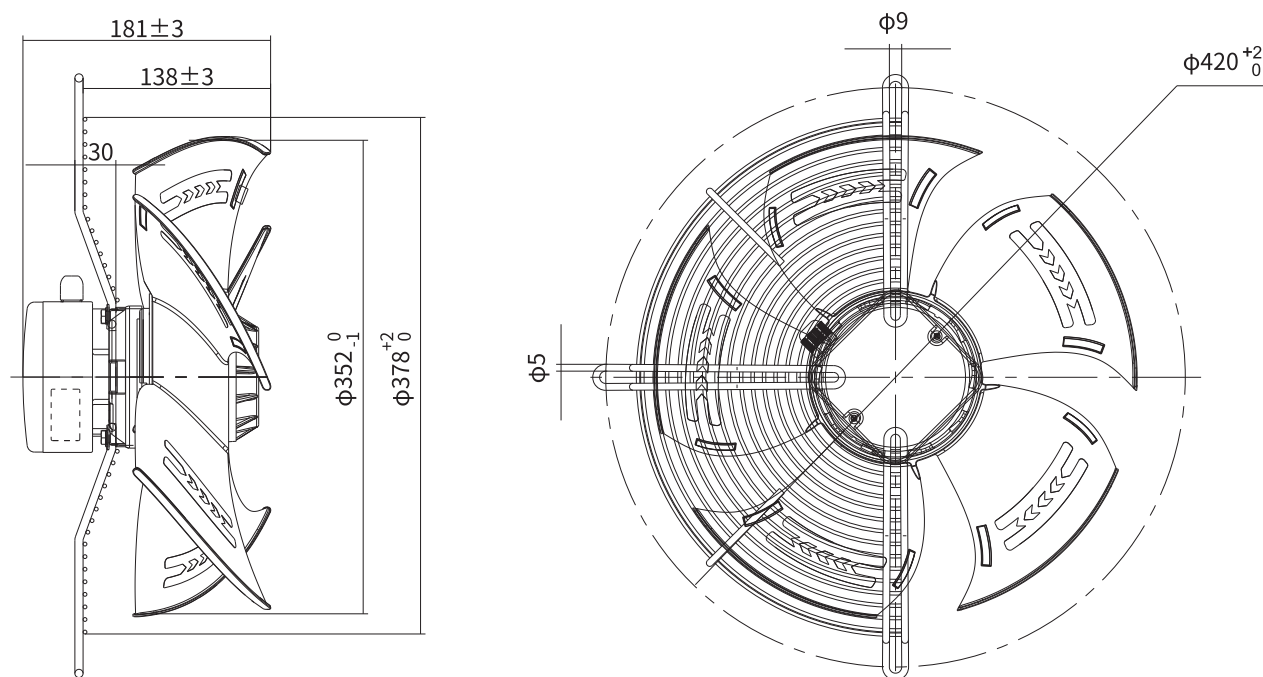

Φ350-5

Model No.E

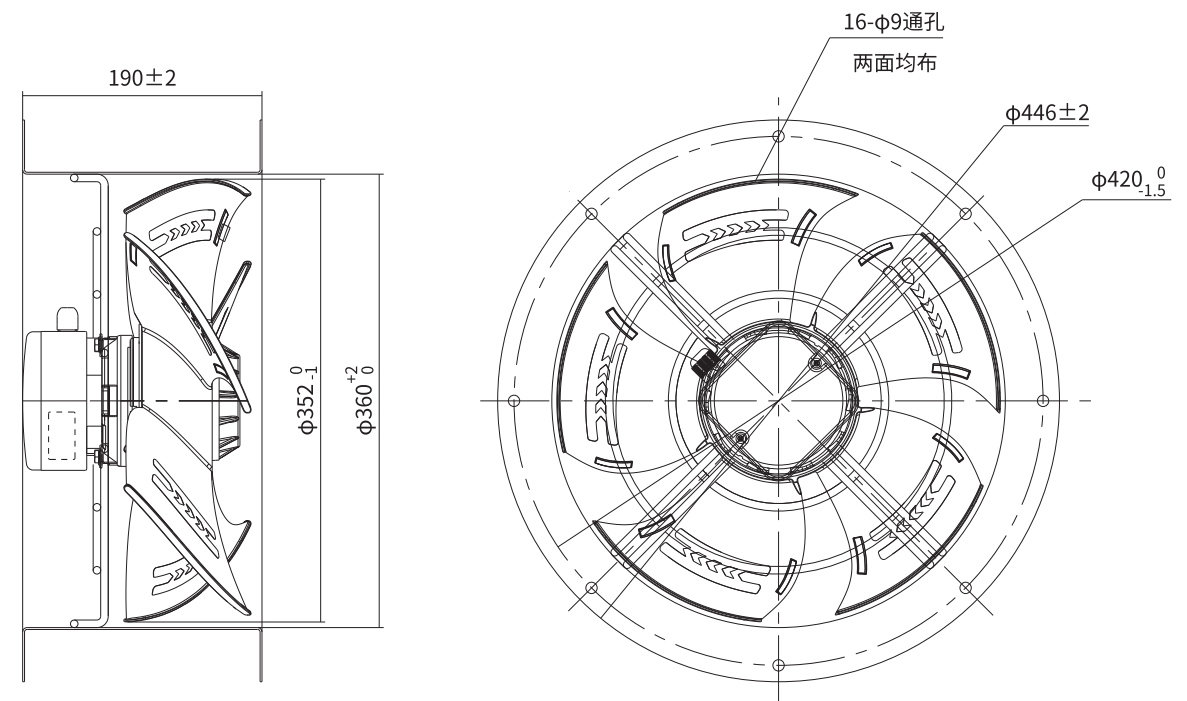

Model No.F0

