





Φ 500-5 系列轴流风机
Φ 500-5 Series Axial Fan

材 质：转子铸铝
Material: Aluminum casting
保护等级: IP54
Protection Class: IP54
绝缘等级: F
Insulation Class: F
轴 承：免维护滚珠球轴承
Bearing: Maintenance Free Ball Bearing



4-Pole

6-Pole/8-Pole

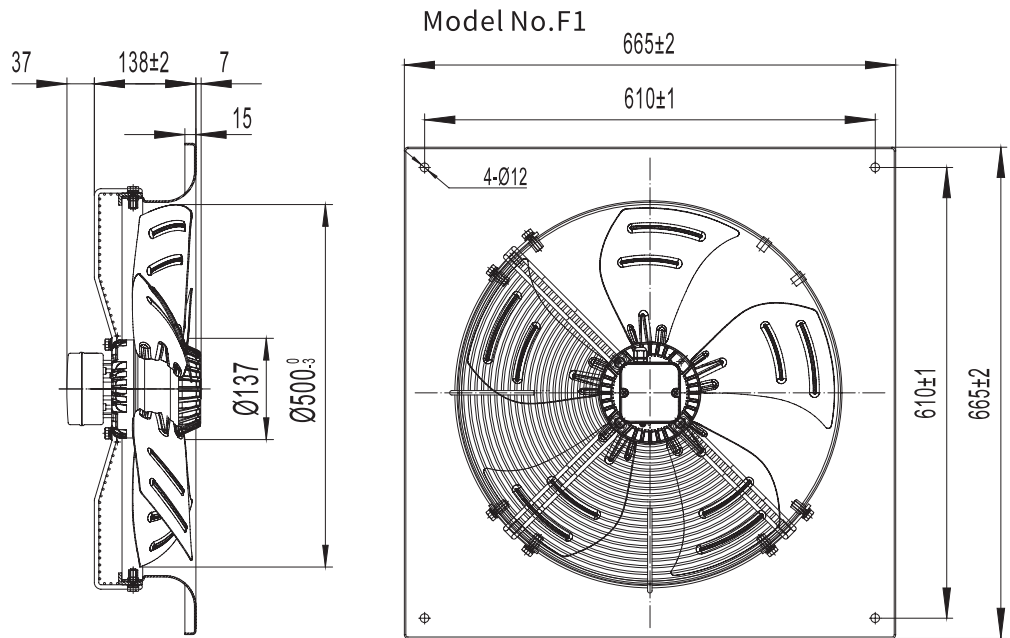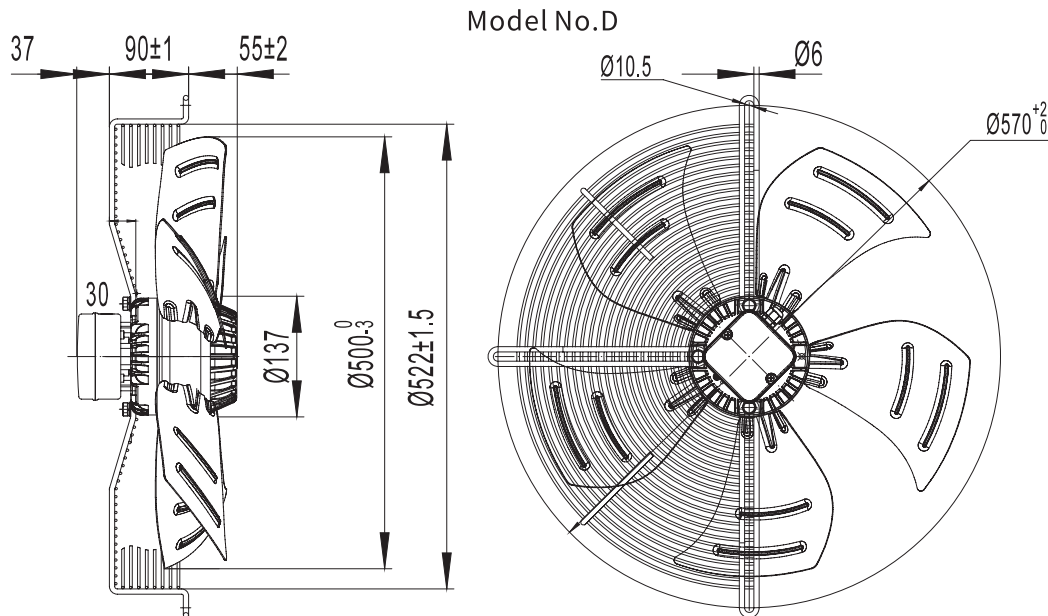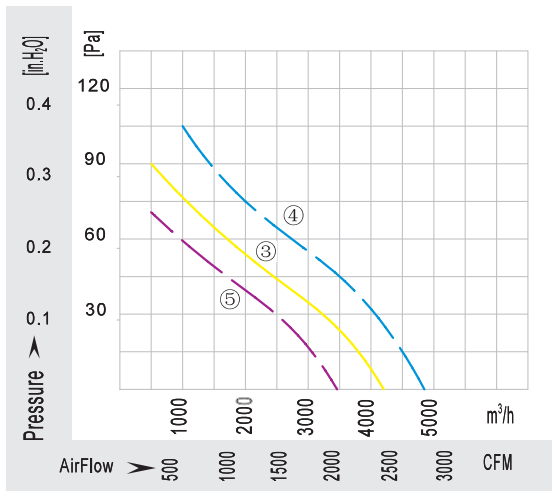
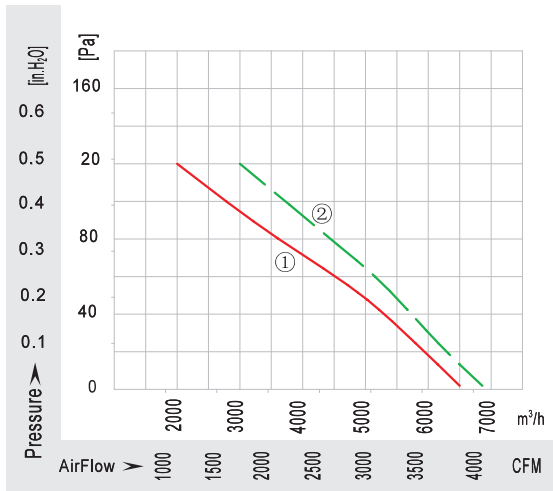


 B型网罩	 C型网罩	 D型网罩	 G型网罩	 F型正扣面板	 F型反扣面板
Model No.B	Model No.C	Model No.D	Model No.G	Model No.F0	Model No.F1
YWF.A4S-500S-5BIA00	YWF.A4S-500S-5CIA00	YWF.A4S-500S-5DIA00	YWF.A4S-500S-5GIA00	YWF.A4S-500S-5FIA00	YWF.A4S-500S-5FIA01
YWF.A4T-500S-5BIA00	YWF.A4T-500S-5CIA00	YWF.A4T-500S-5DIA00	YWF.A4T-500S-5GIA00	YWF.A4T-500S-5FIA00	YWF.A4T-500S-5FIA01
YWF.A6S-500S-5BIA00	YWF.A6S-500S-5CIA00	YWF.A6S-500S-5DIA00	YWF.A6S-500S-5GIA00	YWF.A6S-500S-5FIA00	YWF.A6S-500S-5FIA01
YWF.A6T-500S-5BIA00	YWF.A6T-500S-5CIA00	YWF.A6T-500S-5DIA00	YWF.A6T-500S-5GIA00	YWF.A6T-500S-5FIA00	YWF.A6T-500S-5FIA01
YWF.A8T-500S-5BIA00	YWF.A8T-500S-5CIA00	YWF.A8T-500S-5DIA00	YWF.A8T-500S-5GIA00	YWF.A8T-500S-5FIA00	YWF.A8T-500S-5FIA01



 E型导风筒	电压 Voltage	频率 Frequency	电 流 Current	输入功率 Input Power	转速 Speed	电 容 Capacitor	风 量 Air Flow(OPa)	噪 音 Noise	曲线 Curve No.	运行温度 Operating Temperature	认 证 Approvals
Model No.E	V	Hz	A	W	RPM	μF	m³/h/CFM	dB(A)	#	Min/Max(°C)	
YWF.A4S-500S-5EIA00	220/230	50	2.00	420	1320	10	6500/3835	69	①	-30/+60	CCC,CE,Rohs
		60	2.50	500	1450		6800/4012	70	②		
YWF.A4T-500S-5EIA00	380/400	50	0.95	420	1350	/	6500/3835	69	①	-30/+60	CCC,CE,Rohs
		60	0.90	500	1500		6800/4012	70	②		
YWF.A6S-500S-5EIA00	220/230	50	1.10	220	920	4	4320/2548	65	③	-30/+60	CCC,CE,Rohs
		60	1.38	275	1020		4800/2832	66	④		
YWF.A6T-500S-5EIA00	380/400	50	0.62	220	920	/	4320/2548	65	③	-30/+60	CCC,CE,Rohs
		60	0.60	275	1100		4800/2832	66	④		
YWF.A8T-500S-5EIA00	380/400	50	0.30	110	700	/	3400/2006	56	⑤	-30/+60	CCC,CE,Rohs

Φ500-5



Model No.B

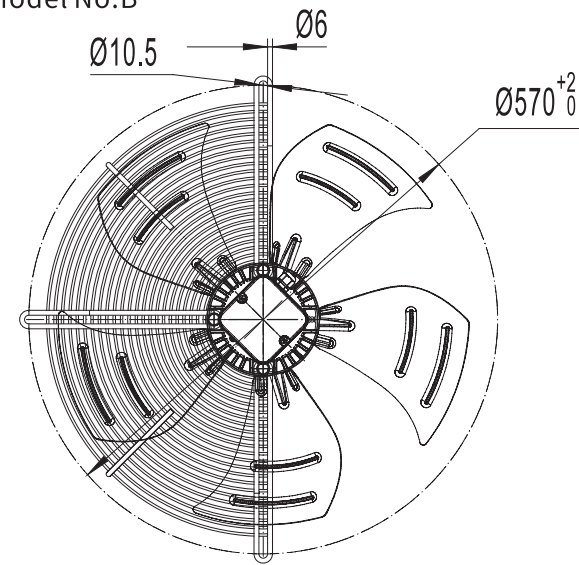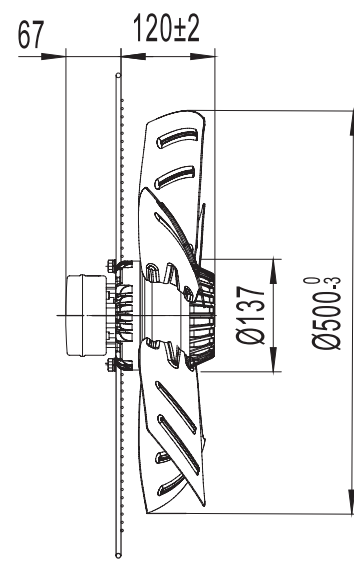

Model No.C

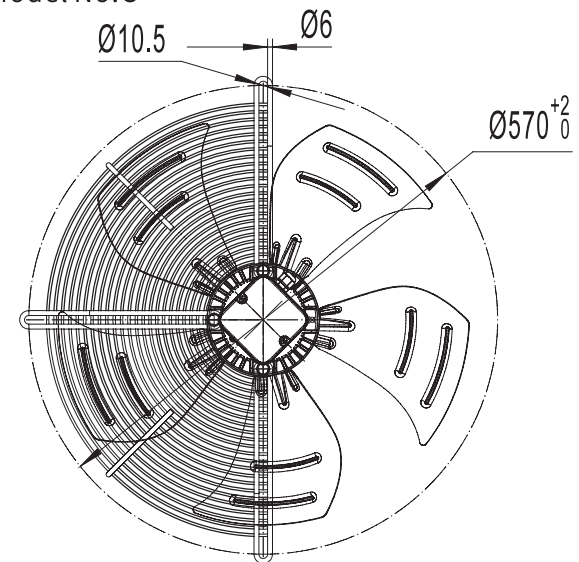
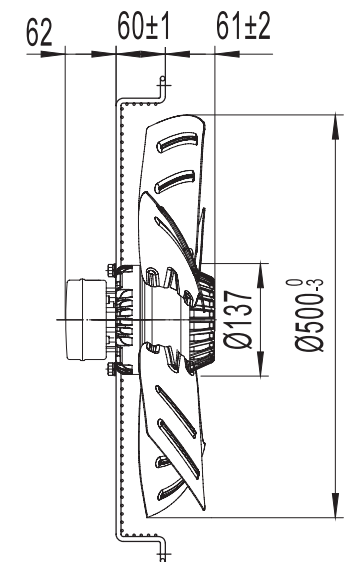


Model No.G

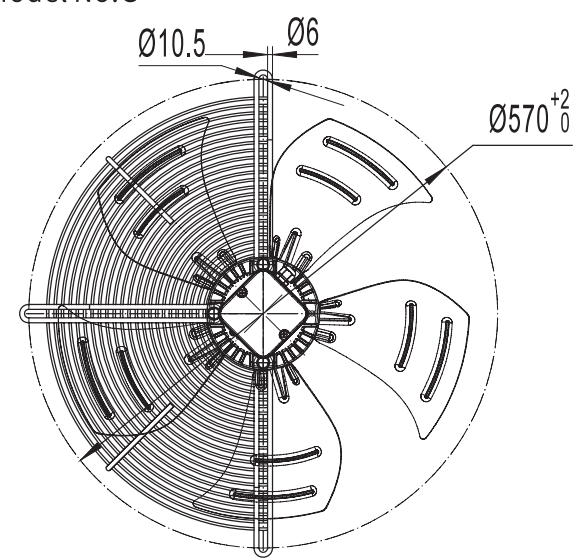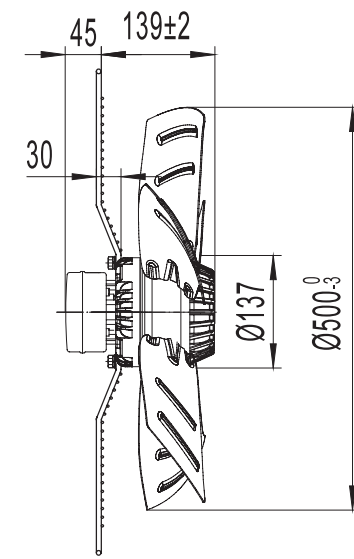

Φ500-5

Model No.E

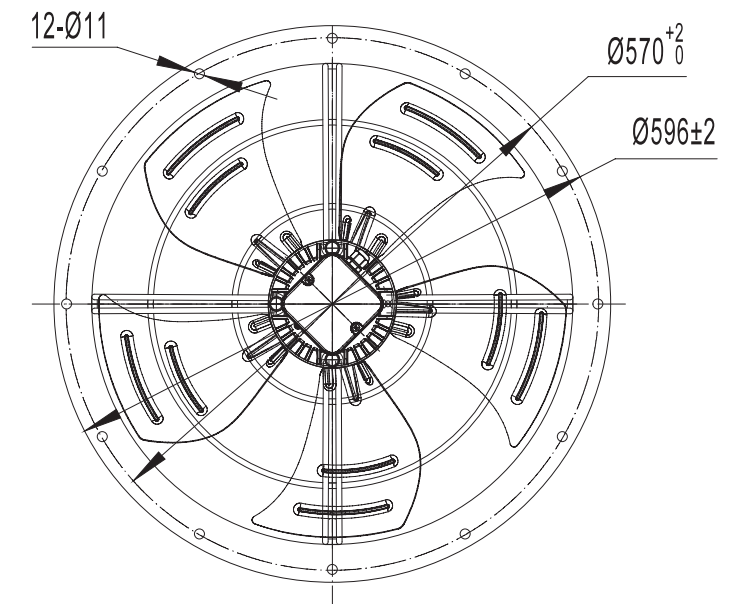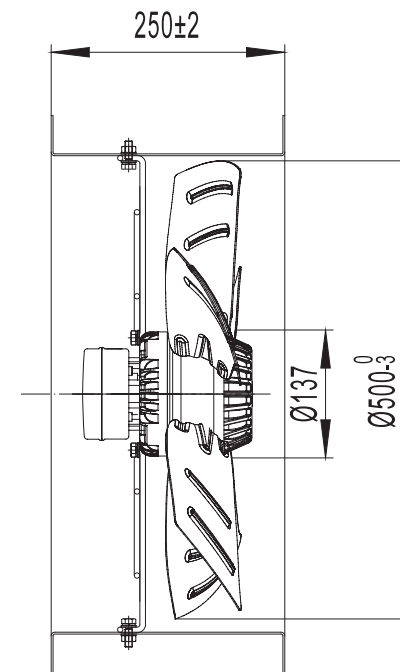

Model No.FO

