


 Φ120

Φ 120 系列前倾离心风机

Φ 120 Series Forward Centrifugal Fan

- 材 质：风轮镀锌板、转子铸铝
- 保护等级: IP44
- 绝缘等级: F
- 轴 承: 免维护滚珠球轴承




Material: Impeller: Steel Sheet Rotor: Aluminum Casting

Protection Class: IP44

Insulation Class: F

Bearing: Maintenance free ball bearing

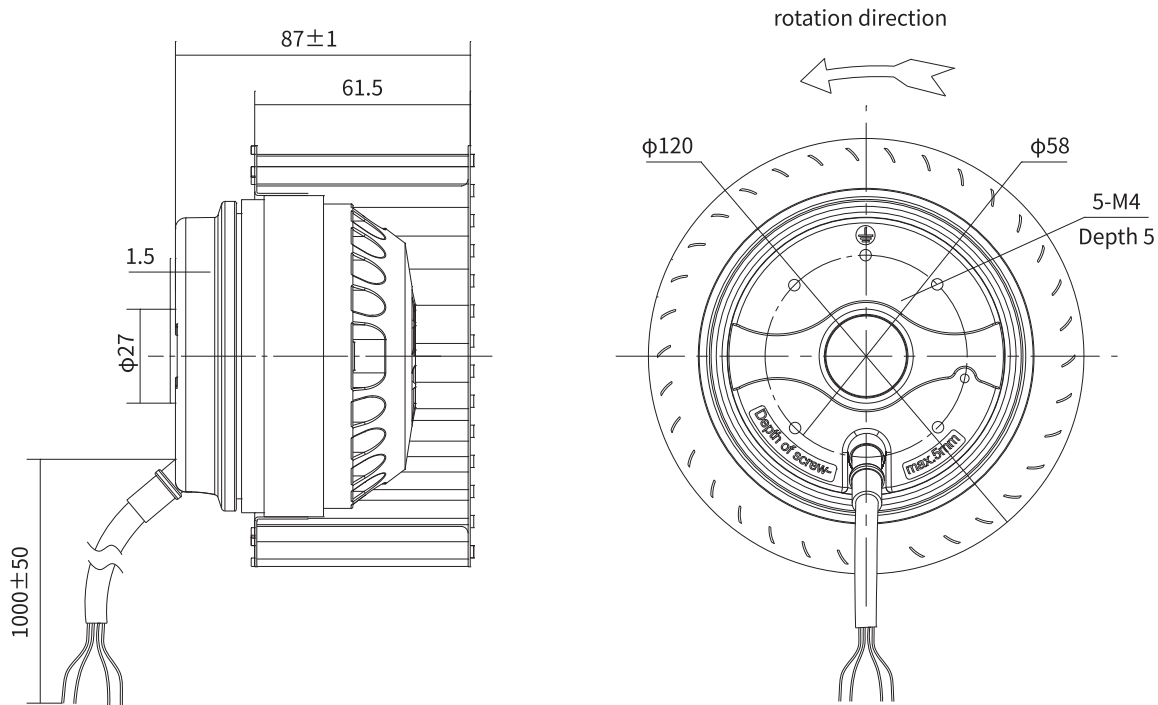

备注：此款风机可正反向定制

Remarks: This fan can be designed as clockwise and counterclockwise rotation


	电 压	频 率	电 流	输入功率	转 速	电 容	风 量	噪 音	曲 线	运行温度	认 证
Model No.	V	Hz	A	W	RPM	μF	m³/h/CFM	dB(A)	#	Min/Max(°C)	Approvals
YWF.F2S-120-060AX0A	115/120	60	0.53	64	2975	6	210/120	66	②	-30/+60	RoHs
YWF.F4S-120-060AX0A	115/120	60	0.20	25	1650	3	135/80	46	③	-30/+60	RoHs
YWF.F2S-120-060AX00	220/230	50	0.21	45	2515	2	200/120	63	①	-30/+60	CCC,CE,RoHs
	220/230	60	0.28	59	2685	2	220/130	66	②	-30/+60	CE,RoHs

 Φ133

Φ 133 系列前倾离心风机

Φ 133 Series Forward Centrifugal Fan

- 材 质：风轮镀锌板、转子铸铝
- 保护等级: IP44
- 绝缘等级: F
- 轴 承: 免维护滚珠球轴承

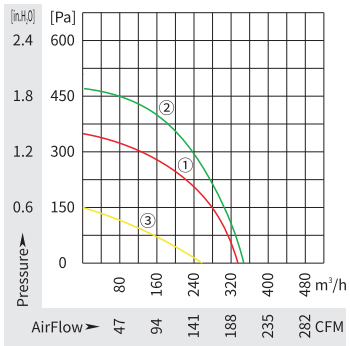


Material: Impeller: Steel Sheet Rotor: Aluminum Casting

Protection Class: IP44

Insulation Class: F

Bearing: Maintenance free ball bearing

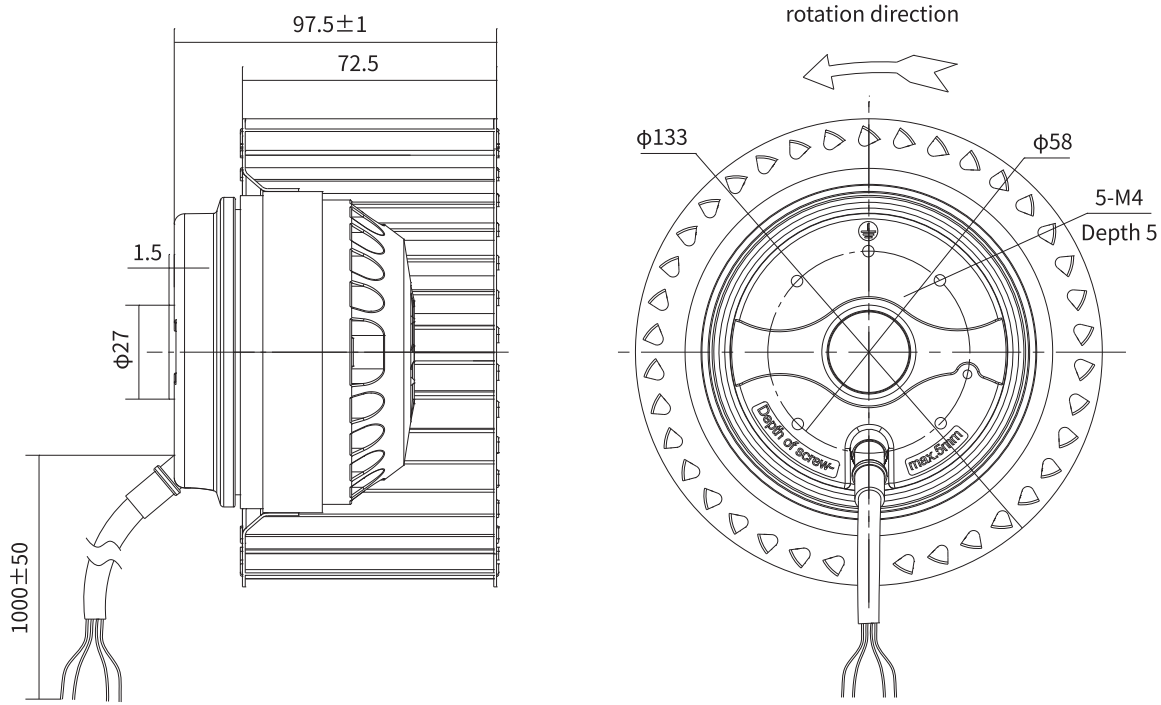

备注：此款风机可正反向定制

Remarks: This fan can be designed as clockwise and counterclockwise rotation

	电 压	频 率	电 流	输入功率	转 速	电 容	风 量	噪 音	曲 线	运行温度	认 证
Model No.	V	Hz	A	W	RPM	μF	m³/h/CFM	dB(A)	#	Min/Max(°C)	Approvals
YWF.F2S-133-073AX0A	115/120	60	0.87	100	2750	10	340/195	66	②	-30/+60	RoHs
YWF.F4S-133-073AX0A	115/120	60	0.36	42	1700	6	250/145	58	③	-30/+60	RoHs
YWF.F2S-133-073AX00	220/230	50	0.35	74	2500	3	330/190	61	①	-30/+60	CCC,CE,RoHs
	220/230	60	0.48	100	2600	3	340/195	63	②	-30/+60	CE,RoHs