

Product Data Sheet 4418 NPU

ebm**papst**

The engineer's choice



4418 NPU**INDEX**

1	General	3
2	Mechanics	3
2.1	General.....	3
2.2	Connections.....	3
3	Operating Data	4
3.1	Electrical Interface - Input.....	4
3.2	Electrical Operating Data	5
3.3	Electrical Features	5
3.4	Aerodynamics	7
3.5	Sound Data.....	9
4	Environment.....	9
4.1	General.....	9
4.2	Climatic Requirements	9
5	Safety.....	10
5.1	Electrical Safety	10
5.2	Approval Tests.....	10
6	Reliability.....	10
6.1	General.....	10

1 General

Fan type	Fan	
Rotating direction looking at rotor	Clockwise	
Airflow direction	Air outlet over struts	
Bearing system	Ball bearing	
Mounting position - shaft	Any	


2 Mechanics

2.1 General

Width	119 mm	
Height	119 mm	
Depth	38 mm	
Mass	0,275 kg	
Housing material	Plastic	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges	Wire outlet corner: 80 Ncm Remaining corners: 80 Ncm	
Screw size	ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Connections

Electrical connection	Wires	
Lead wire length	L = 480 mm	
Tolerance	+ - 10 mm	
Wire size (AWG)	24	
Insulation diameter		

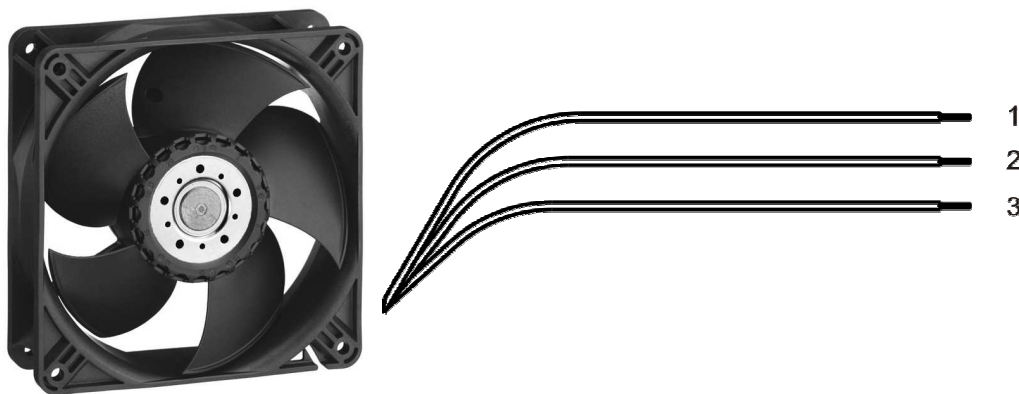

Wire	Color	Operation	Wire size	Insulation diameter
1	red	+ UB	AWG 24	1,1 mm
2	blue	- GND	AWG 24	1,1 mm
3	violet	PWM	AWG 24	1,1 mm

3 Operating Data

3.1 Electrical Interface - Input

Control input	PWM
---------------	-----

Features

PWM - Frequency	1 kHz - 30 kHz typical: 5 kHz
-----------------	----------------------------------

Characteristics	<table border="1"> <caption>Approximate data points from the speed vs PWM graph</caption> <thead> <tr> <th>PWM [%]</th> <th>Speed [1/min]</th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td></tr> <tr><td>5</td><td>1000</td></tr> <tr><td>10</td><td>1000</td></tr> <tr><td>20</td><td>1300</td></tr> <tr><td>30</td><td>1600</td></tr> <tr><td>40</td><td>1900</td></tr> <tr><td>50</td><td>2200</td></tr> <tr><td>60</td><td>2500</td></tr> <tr><td>70</td><td>2800</td></tr> <tr><td>80</td><td>3100</td></tr> <tr><td>90</td><td>3700</td></tr> <tr><td>100</td><td>3700</td></tr> </tbody> </table>	PWM [%]	Speed [1/min]	0	0	5	1000	10	1000	20	1300	30	1600	40	1900	50	2200	60	2500	70	2800	80	3100	90	3700	100	3700
PWM [%]	Speed [1/min]																										
0	0																										
5	1000																										
10	1000																										
20	1300																										
30	1600																										
40	1900																										
50	2200																										
60	2500																										
70	2800																										
80	3100																										
90	3700																										
100	3700																										
Schematics																											

3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$: corresp. to free air flow (see chapter aerodynamics)

I: corresp. to arithm. mean current value

Name	Condition		
PWM 0001	PWM: 100 %; f: 5 kHz	f: 1 kHz	f: 30 kHz

Features	Condition	Symbol	Values		
Voltage range		U	20 V		60 V
Nominal voltage		U_N		48 V	
Power consumption	$\Delta p = 0$	P	0,8 W	5 W	5,4 W
Tolerance	PWM 0010		+/- 17,5 %	+/- 25 %	+/- 25 %
Current consumption	$\Delta p = 0$	I	42 mA	105 mA	90 mA
Tolerance	PWM 0010		+/- 17,5 %	+/- 25 %	+/- 25 %
Speed	$\Delta p = 0$	n	1.660 1/min	3.650 1/min	3.650 1/min
Tolerance	PWM 0010		+/- 12,5 %	+/- 3 %	+/- 3 %
Starting current consumption				< 900 mA	

3.3 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection	Rectifying diode	
Max. residual current at U_N	$I_F < 1$ mA	
Locked rotor protection	Auto restart	
Locked rotor current at U_N	I_{block} approx. 900 mA	
Clock signal at locked rotor	t_3 / t_4 typical: 0,5 s / 10 s	




3.4 Aerodynamics

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801.
 Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C;
 In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal.
 The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

3.650 l/min at free air flow	PWM 100 %; f: 5 kHz	f: 1 kHz	f: 30 kHz
------------------------------	---------------------	----------	-----------

Max. free-air flow ($\Delta p = 0$ / $\dot{V} = \text{max.}$)	205 m ³ /h	
Max. static pressure ($\Delta p = \text{max.}$ / $\dot{V} = 0$)	118 Pa	

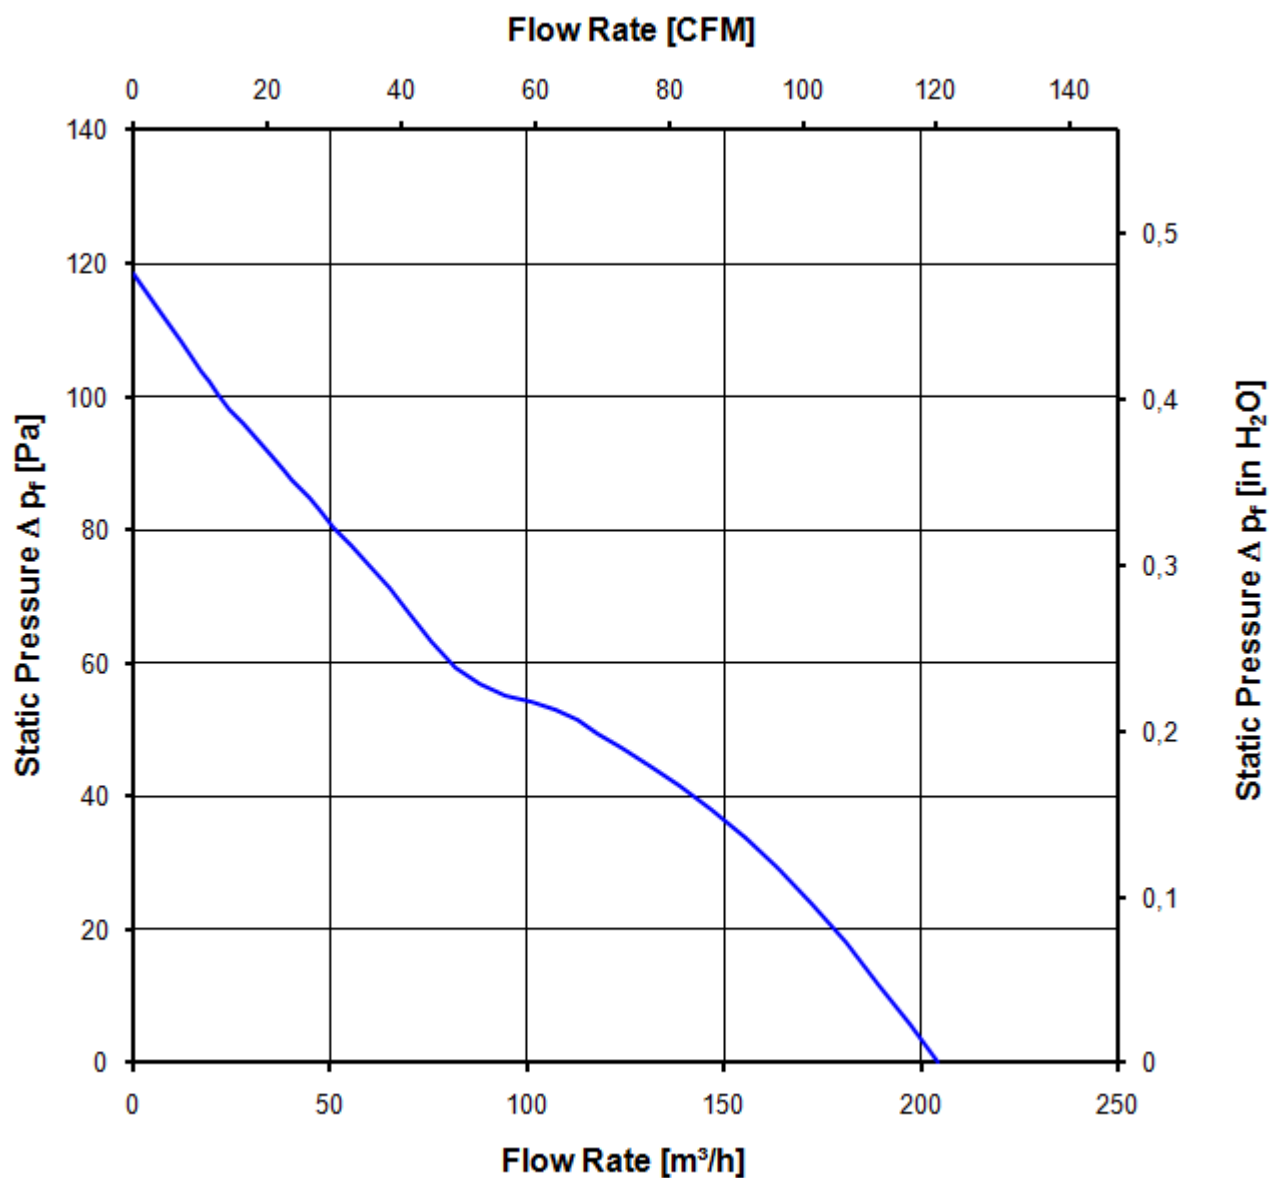

3.5 Sound Data

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.
 Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)
 Measured in a semianchoic chamber with a background noise level of $L_p(A) < 5 \text{ dB(A)}$
 For further measurement conditions see chapter aerodynamics.

a.) Operation condition:

3.650 1/min at free air flow	PWM 100 %; f: 5 kHz	f: 1 kHz	f: 30 kHz
------------------------------	---------------------	----------	-----------

Optimal operating point	125,0 m ³ /h @ 42 Pa	
Sound power level at the optimal operating point	5,6 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	46,0 dB(A)	

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	70 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	85 °C	

4.2 Climatic Requirements

Humidity requirements	humid temperature, cyclic; according to DIN EN 60068-2-38, 10 cycle and condensation water check; according to DIN EN ISO 6270-2, 14 days	
Water exposure	Splash water check IPX4; according to DIN EN 60529 VDE 0470, not certified	
Dust requirements	Dust check IP5X; according to DIN EN 60529 VDE 0470, not certified	
Salt fog requirements	salt fog, cyclic, in operation; according to DIN EN 60068-2-52, 3 cycle	

Permitted application area:

The product is for the use in open and unsheltered areas. Direct exposure to water as well as saline ambient conditions are allowed provided that this does not prevent the normal operation.

Pollution degree 3 (according DIN EN 60664-1)

It occurs conductive pollution or dry non-conductive pollution which becomes conductive due to condensation.

Please require severity levels and specification parameters from the responsible development departments.

5 Safety

5.1 Electrical Safety

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min. 850 VDC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
Clearance / creepage distance	1,0 mm / 1,5 mm	
Protection class	III	

5.2 Approval Tests

CE	EC Declaration of Conformity	Yes
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	Yes / GB 12350 Safety Requirements for small Power Motors

6 Reliability

6.1 General

Life expectancy L10 at TU = 40 °C	62.500 h	
Life expectancy L10 at TU max.	30.000 h	
Life expectancy L10 acc. to IPC 9591 at TU = 40 °C	105.000 h	

