

NRG 77


- **Material:** Housing: Aluminum
Impeller: Plastic
Motor protection cap: Plastic
- **For potential mounting positions, page 15**
- **Multi-venturi available**
- **Mains connector X, interface connector W and interface see page 27 ff.**





Nominal data	Curve	Rated voltage	Frequency	Max. air flow	Max. air flow	Max. pressure increase	Max. pressure increase	Max. input power	Max. speed	Perm. amb. motor temp.	Perm. temp. of medium	Part number
Type	V	Hz	m³/h	cfm	Pa	wg	W	min⁻¹	°C	°C		
NRG 77	①	230	50/60	87	51	2,100	8.4	62	14,000	60	80	55667.70030
	②	120	60	90	53	2,200	8.8	72	14,000	60	80	on request

Subject to change.

Dimensions in mm. Drawing valid for part number 55667.70030.

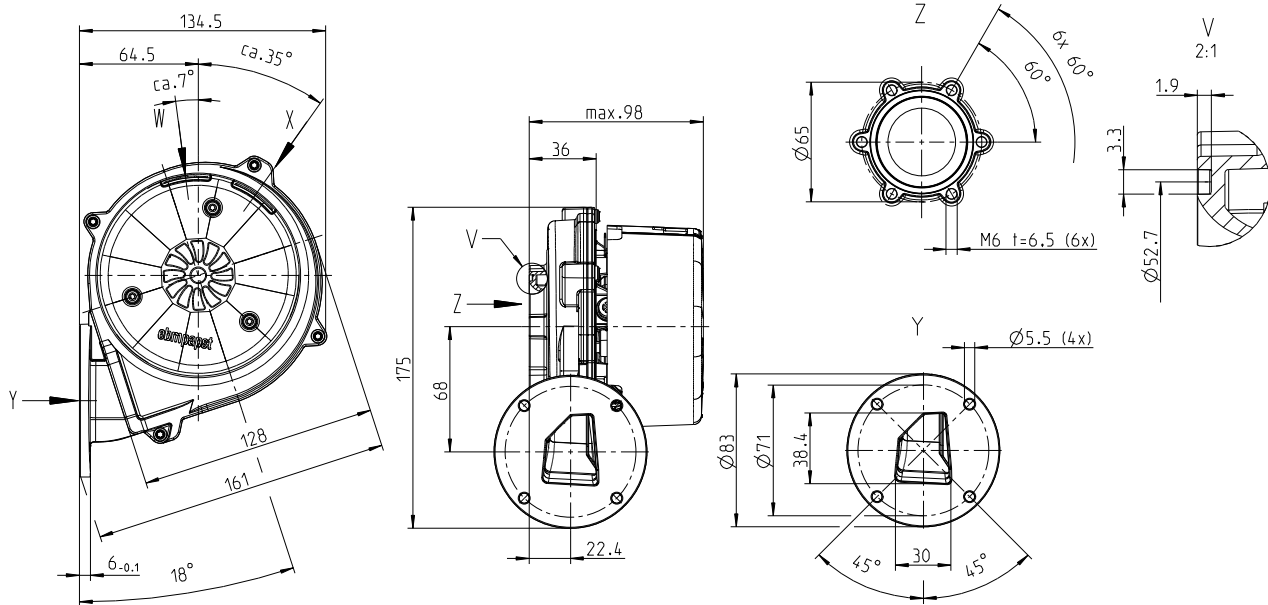

Curves

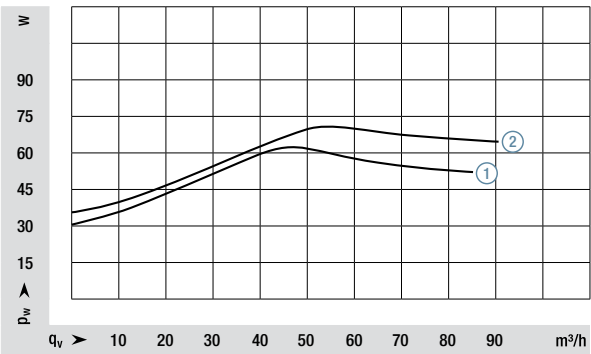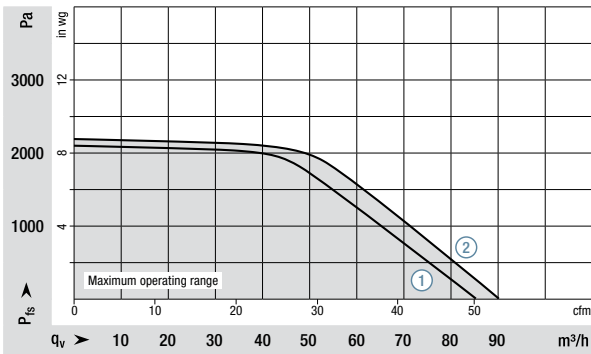

NRG 118


- **Material:** Housing: Aluminum
Impeller: Plastic
Motor protection cap: Plastic
- **For potential mounting positions, page 15**
- **Multi-venturi available**
- **Mains connector X, interface connector W and interface see page 27 ff.**



Nominal data	Curve	Rated voltage	Frequency	Max. air flow	Max. air flow	Max. pressure increase	Max. pressure increase	Max. input power	Max. speed	Perm. amb. motor temp.	Perm. temp. of medium	Part number
Type	V	Hz	m³/h	cfm	Pa	wg	W	min⁻¹	°C	°C		
NRG 118	①	230	50/60	98	58	3,000	12	72	9,000	60	80	55667.31160
	②	120	60	97	57	2,800	11.2	70	9,000	60	80	55667.30030

Subject to change. More powerful motor optional.

Dimensions in mm. Drawing valid for part number 55667.31160.

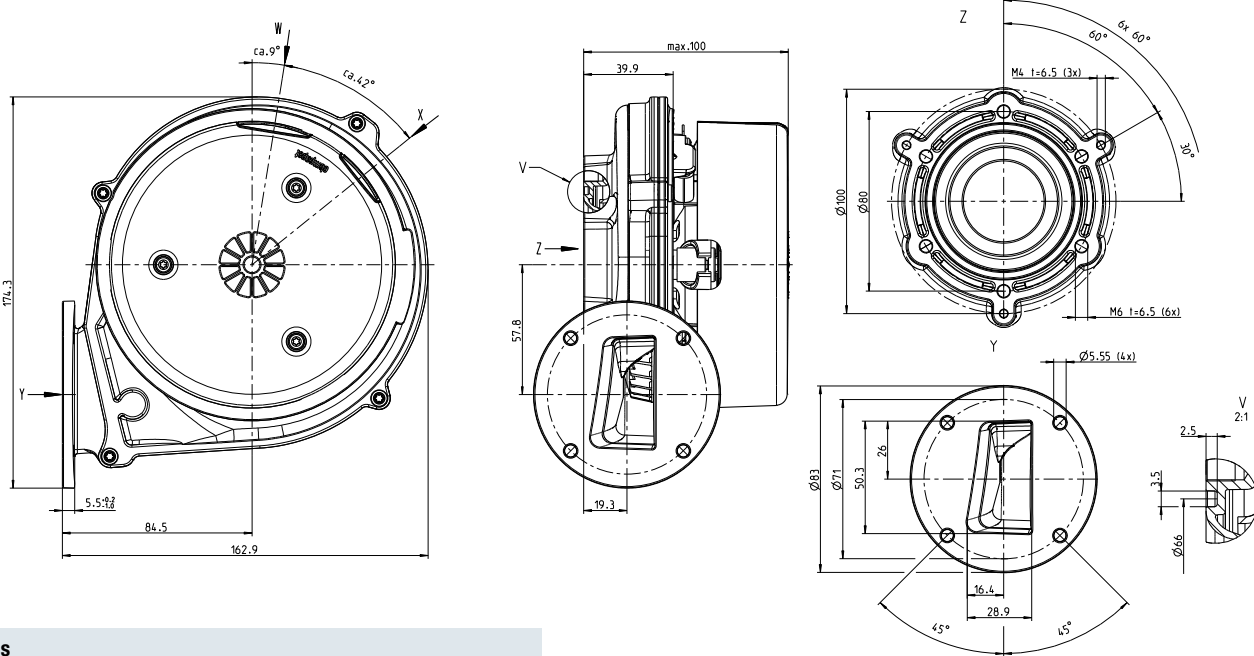

Curves

